



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECspeed®2017_fp_base = 252

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

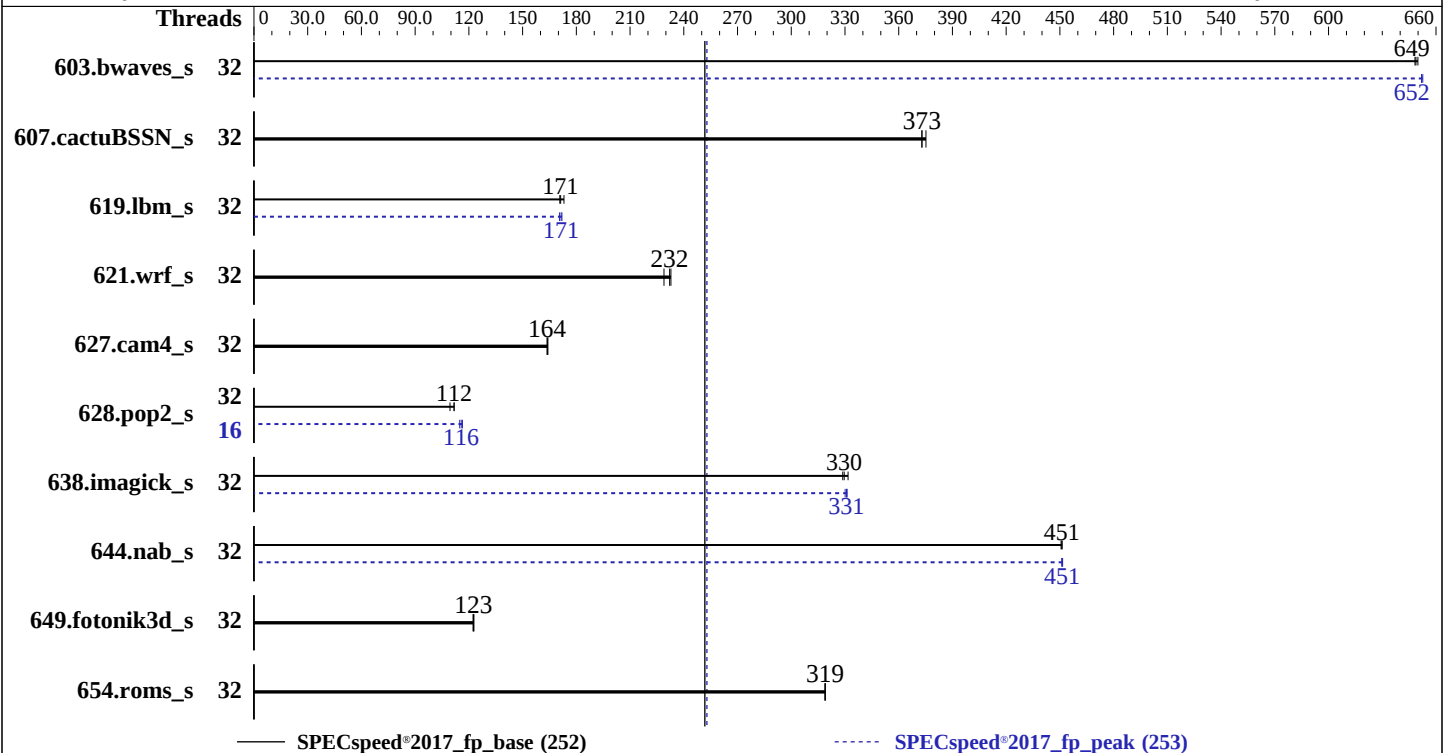

Hardware

CPU Name: AMD EPYC 8325P
Max MHz: 4500
Nominal: 2700
Enabled: 32 cores, 1 chip
Orderable: 1 Chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip,
32 MB shared / 4 cores
Other: None
Memory: 192 GB (6 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 1 x 960 GB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP7
Kernel 6.4.0-150700.53.6-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: HPE BIOS Version v2.10 04/02/2026
released Apr-2026
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS is set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECspeed®2017_fp_base = 252

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	91.0	648	90.8	650	<u>90.9</u>	<u>649</u>	32	<u>90.5</u>	<u>652</u>	90.4	653	90.5	652
607.cactuBSSN_s	32	44.4	375	44.7	373	<u>44.7</u>	<u>373</u>	32	44.4	375	44.7	373	<u>44.7</u>	<u>373</u>
619.lbm_s	32	30.7	171	<u>30.6</u>	<u>171</u>	30.3	173	32	<u>30.5</u>	<u>171</u>	30.7	171	30.5	172
621.wrf_s	32	57.8	229	56.8	233	<u>57.0</u>	<u>232</u>	32	57.8	229	56.8	233	<u>57.0</u>	<u>232</u>
627.cam4_s	32	54.1	164	54.0	164	<u>54.1</u>	<u>164</u>	32	54.1	164	54.0	164	<u>54.1</u>	<u>164</u>
628.pop2_s	32	<u>106</u>	<u>112</u>	106	112	108	109	16	102	116	103	115	<u>103</u>	<u>116</u>
638.imagick_s	32	<u>43.8</u>	<u>330</u>	43.5	332	43.9	329	32	43.6	331	43.7	330	<u>43.6</u>	<u>331</u>
644.nab_s	32	38.8	451	<u>38.7</u>	<u>451</u>	38.7	451	32	<u>38.7</u>	<u>451</u>	38.7	452	38.7	451
649.fotonik3d_s	32	74.2	123	<u>74.3</u>	<u>123</u>	74.5	122	32	74.2	123	<u>74.3</u>	<u>123</u>	74.5	122
654.roms_s	32	49.4	319	<u>49.4</u>	<u>319</u>	49.4	319	32	49.4	319	<u>49.4</u>	<u>319</u>	49.4	319

SPECspeed®2017_fp_base = 252

SPECspeed®2017_fp_peak = 253

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

tuned-adm profile was set to virtual-host using 'tuned-adm profile virtual-host'



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECspeed®2017_fp_base = 252

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-31"

LD_LIBRARY_PATH =

"/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "32"

Environment variables set by runcpu during the 603.bwaves_s peak run:

GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 619.lbm_s peak run:

GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 628.pop2_s peak run:

GOMP_CPU_AFFINITY = "0-15"

Environment variables set by runcpu during the 638.imagick_s peak run:

GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 644.nab_s peak run:

GOMP_CPU_AFFINITY = "0-31"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB

Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Peak Frequency Compute

AMD SMT Option set to Disabled

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

AMD Periodic Directory Rinse Tuning set to Blended

ACPI CST C2 Latency set to 18 microseconds

Thermal Configuration set to Maximum Cooling

Package Power Limit Control Mode set to Manual

Package Power Limit Value set to 225

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Fri Jun 19 02:33:03 2026

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECspeed®2017_fp_base = 252

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

Table of contents

1. `uname -a`
2. `w`
3. Username
4. `ulimit -a`
5. `sysinfo process ancestry`
6. `/proc/cpuinfo`
7. `lscpu`
8. `numactl --hardware`
9. `/proc/meminfo`
10. `who -r`
11. Systemd service manager version: `systemd 254 (254.27+suse.167.g130293e510)`
12. Services, from `systemctl list-unit-files`
13. Linux kernel boot-time arguments, from `/proc/cmdline`
14. `cpupower frequency-info`
15. `tuned-adm active`
16. `sysctl`
17. `/sys/kernel/mm/transparent_hugepage`
18. `/sys/kernel/mm/transparent_hugepage/khugepaged`
19. OS release
20. Disk information
21. `/sys/devices/virtual/dmi/id`
22. `dmidecode`
23. BIOS

```
1. uname -a
Linux localhost 6.4.0-150700.53.6-default #1 SMP PREEMPT_DYNAMIC Tue Jul 1 14:54:47 UTC 2025 (8ab7501)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
02:33:03 up 1 min, 3 users, load average: 0.31, 0.18, 0.07
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) 0
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 771559
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 771559
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECspeed®2017_fp_base = 252

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash $SPEC/run_fpspeed_sh.sh
sudo ./run_fpspeed.py
python3 ./run_fpspeed.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.fpspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

-----
6. /proc/cpuinfo
model name      : AMD EPYC 8325P 32-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb002162
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass rsno
TLB size      : 192 4K pages
cpu cores      : 32
siblings       : 32
1 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-31
physical id 0: apicids 0-31
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

-----
7. lscpu

From lscpu from util-linux 2.40.4:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:   0-31
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 8325P 32-Core Processor
CPU family:            26
Model:                 2
Thread(s) per core:    1
Core(s) per socket:    32
Socket(s):             1
Stepping:              1
BogoMIPS:              5391.35
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl
nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECspeed®2017_fp_base = 252

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave
avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm
sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced
vmxcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk
avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
amd_ppin cpc amd_ibpb_ret arat npt lbrv svm_lock nrip_save
tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
bus_lock_detect movdiri movdir64b overflow_recov sucoor smca fsmr
avx512_vp2intersect flush_l1d debug_swap hv_inuse_wr_allowed
rsno_user_kernel_no amd_lbr_pmc_freeze

Virtualization:

L1d cache:

L1i cache:

L2 cache:

L3 cache:

NUMA node(s):

NUMA node0 CPU(s):

Vulnerability Gather data sampling:

Vulnerability Indirect target selection:

Vulnerability Itlb multihit:

Vulnerability L1tf:

Vulnerability Mds:

Vulnerability Meltdown:

Vulnerability Mmio stale data:

Vulnerability Reg file data sampling:

Vulnerability Retbleed:

Vulnerability Spec rstack overflow:

Vulnerability Spec store bypass:

Vulnerability Spectre v1:

Vulnerability Spectre v2:

Vulnerability Srbds:

Vulnerability Tsx async abort:

AMD-V

1.5 MiB (32 instances)

1 MiB (32 instances)

32 MiB (32 instances)

256 MiB (8 instances)

1

0-31

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Mitigation; IBPB on VMEXIT only

Mitigation; Speculative Store Bypass disabled via prctl

Mitigation; usercopy/swaps barriers and __user pointer
sanitization

Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
disabled; PBRSE-eIBRS Not affected; BHI Not affected

Not affected

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)

node 0 cpus: 0-31

node 0 size: 192919 MB

node 0 free: 191872 MB

node distances:

node 0

0: 10

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECspeed®2017_fp_base = 252

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

9. /proc/meminfo

MemTotal: 197549312 kB

10. who -r

run-level 3 Jun 19 02:32

11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore tuned wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant

enabled-runtime systemd-remount-fs

disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info firewalld fsidd gnome-remote-desktop gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievdt issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount ostree-state-overlay@ rpcbind rpmconfigcheck rsyncd rtkit-daemon samba-bgqd serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@

indirect pcsd saned@ systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.53.6-default
root=UUID=d0b32dbd-90a4-4b63-ab12-5cda718ac1ef
splash=silent
resume=/dev/disk/by-uuid/d6c60601-2238-4347-950d-7321063e97c9
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info

analyzing CPU 7:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. tuned-adm active

Current active profile: virtual-host

16. sysctl

kernel.numa_balancing 0
kernel.randomize_va_space 0

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECspeed®2017_fp_base = 252

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

```
vm.compaction_proactiveness      20
vm.dirty_background_bytes        0
vm.dirty_background_ratio        5
vm.dirty_bytes                   0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                   8
vm.dirty_writeback_centisecs     500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold             500
vm.min_unmapped_ratio           1
vm.nr_hugepages                  0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages       0
vm.swappiness                     1
vm.watermark_boost_factor       15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode             1
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7
```

```
-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda5 xfs 436G 25G 412G 6% /home
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor: HPE
Product: ProLiant DL145 Gen11
Product Family: ProLiant
Serial: DL145GEN11
```

```
-----
22. dmidecode
Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECspeed®2017_fp_base = 252

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

5x Micron MTC20F2085S1RC64BD2 MWFF 32 GB 2 rank 6400

1x Micron MTC20F2085S1RC64BD2 QSFF 32 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE

BIOS Version: 2.10

BIOS Date: 04/02/2026

BIOS Revision: 2.10

Firmware Revision: 1.74

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECspeed®2017_fp_base = 252

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

619.lbm_s: -DSPEC_LP64

621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64

628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

638.imagick_s: -DSPEC_LP64

644.nab_s: -DSPEC_LP64

649.fotonik3d_s: -DSPEC_LP64

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5

-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto

-fremap-arrays -fstrip-mining -fstruct-layout=7

-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3

-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp

-lamdlibm -lamdalloc -lflang

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECspeed®2017_fp_base = 252

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fvecLib=AMDLIBM -ffast-math -fopenmp -fltto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5
-fvecLib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -fltto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5
-fvecLib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -fltto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=2000000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECspeed®2017_fp_base = 252

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

638.imagick_s: Same as 619.lbm_s

```
644.nab_s: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECspeed®2017_fp_base = 252

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Peak Optimization Flags (Continued)

644.nab_s (continued):

```
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -mrecip=none  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3  
-Wl, -mllvm -Wl, -enable-X86-prefetching -DSPEC_OPENMP  
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math  
-fopenmp -fscalar-transform -fvector-transform  
-mllvm -reduce-array-computations=3 -Mrecursive  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

```
628.pop2_s: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3  
-Wl, -mllvm -Wl, -enable-X86-prefetching -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fscalar-transform  
-fvector-transform -Mrecursive -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECspeed®2017_fp_base = 252

SPECspeed®2017_fp_peak = 253

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Sorano-rev1.3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Sorano-rev1.3.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-06-18 17:03:02-0400.

Report generated on 2026-07-14 17:26:17 by CPU2017 PDF formatter v6716.

Originally published on 2026-07-14.