



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.90 GHz, AMD EPYC 8025P)

SPECrate®2017_int_base = 117

SPECrate®2017_int_peak = 117

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

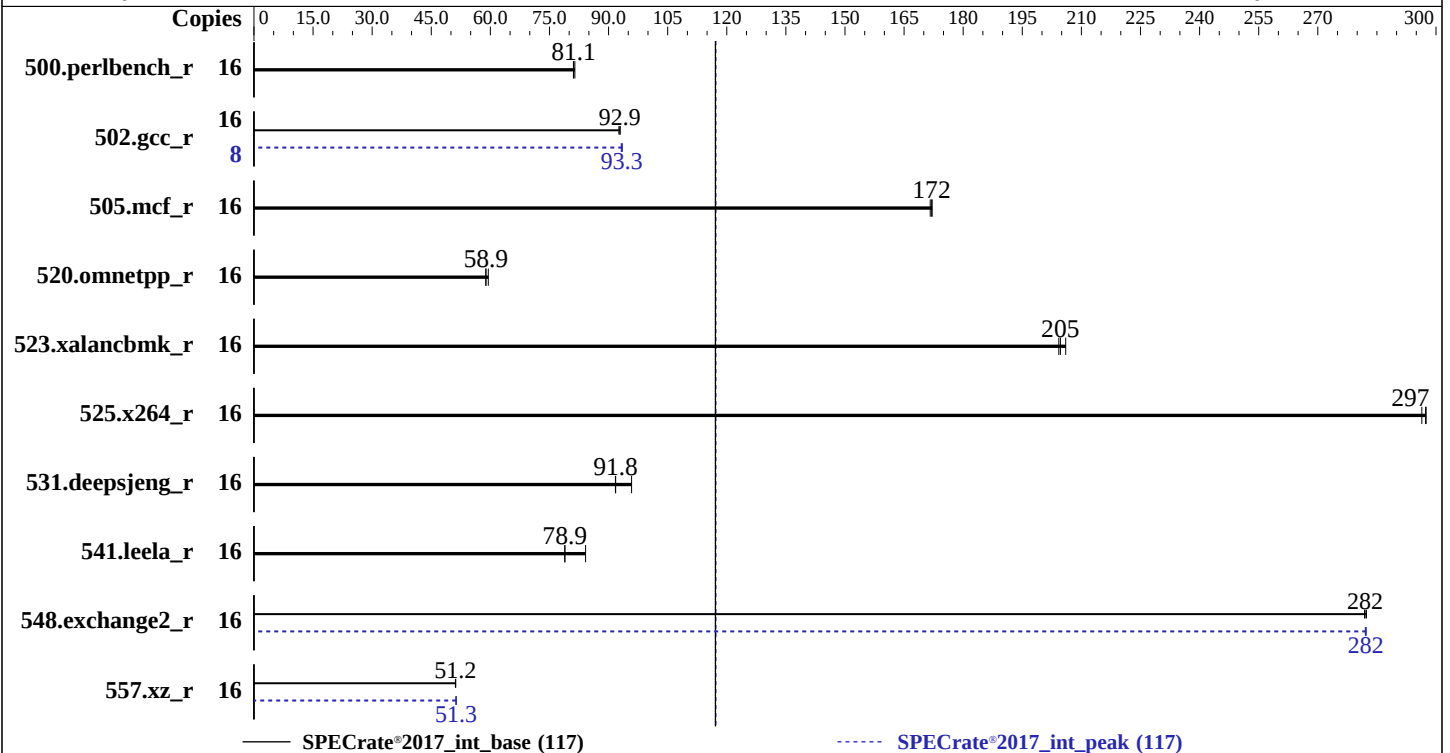

Hardware

CPU Name: AMD EPYC 8025P
Max MHz: 4500
Nominal: 2900
Enabled: 8 cores, 1 chip, 2 threads/core
Orderable: 1 Chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 64 MB I+D on chip per chip,
32 MB shared / 4 cores
Other: None
Memory: 192 GB (6 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 1 x 480 GB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP7
Kernel 6.4.0-150700.53.6-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: HPE BIOS Version v2.10 04/02/2026
released Apr-2026
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: None
Power Management: BIOS is set to prefer performance at the
cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.90 GHz, AMD EPYC 8025P)

SPECrate®2017_int_base = 117

SPECrate®2017_int_peak = 117

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	16	313	81.4	314	81.1	<u>314</u>	<u>81.1</u>	16	313	81.4	314	81.1	<u>314</u>	<u>81.1</u>
502.gcc_r	16	245	92.6	<u>244</u>	<u>92.9</u>	244	92.9	8	122	93.2	121	93.5	<u>121</u>	<u>93.3</u>
505.mcf_r	16	<u>150</u>	<u>172</u>	151	172	150	172	16	<u>150</u>	<u>172</u>	151	172	150	172
520.omnetpp_r	16	357	58.8	<u>356</u>	<u>58.9</u>	353	59.5	16	357	58.8	<u>356</u>	<u>58.9</u>	353	59.5
523.xalancbmk_r	16	<u>82.5</u>	<u>205</u>	82.0	206	82.7	204	16	<u>82.5</u>	<u>205</u>	82.0	206	82.7	204
525.x264_r	16	94.2	297	<u>94.2</u>	<u>297</u>	94.5	296	16	94.2	297	<u>94.2</u>	<u>297</u>	94.5	296
531.deepsjeng_r	16	<u>200</u>	<u>91.8</u>	200	91.7	191	95.8	16	<u>200</u>	<u>91.8</u>	200	91.7	191	95.8
541.leela_r	16	336	78.9	<u>336</u>	<u>78.9</u>	315	84.2	16	336	78.9	<u>336</u>	<u>78.9</u>	315	84.2
548.exchange2_r	16	<u>149</u>	<u>282</u>	148	282	149	282	16	149	282	<u>149</u>	<u>282</u>	148	282
557.xz_r	16	337	51.2	<u>338</u>	<u>51.2</u>	338	51.1	16	337	51.3	337	51.3	<u>337</u>	<u>51.3</u>

SPECrate®2017_int_base = 117

SPECrate®2017_int_peak = 117

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

tuned-adm profile was set to balanced using 'tuned-adm profile balanced'



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.90 GHz, AMD EPYC 8025P)

SPECrate®2017_int_base = 117

SPECrate®2017_int_peak = 117

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB

Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Throughput Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

NUMA memory domains per socket set to Two memory domains per socket

Thermal Configuration set to Maximum Cooling

Package Power Limit Control Mode set to Manual

Package Power Limit Value set to 100

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Tue Jul 7 13:22:27 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.90 GHz, AMD EPYC 8025P)

SPECrate®2017_int_base = 117

SPECrate®2017_int_peak = 117

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

22. dmidecode

23. BIOS

1. uname -a

```
Linux localhost 6.4.0-150700.53.6-default #1 SMP PREEMPT_DYNAMIC Tue Jul 1 14:54:47 UTC 2025 (8ab7501)
x86_64 x86_64 x86_64 GNU/Linux
```

2. w

```
13:22:27 up 1 min, 3 users, load average: 0.58, 0.22, 0.08
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU   WHAT
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) 0
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 772383
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 999999
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 999999
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash $SPEC/run_intrate_sh.sh
sudo ./run_intrate.py
python3 ./run_intrate.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templots/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 8025P 8-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.90 GHz, AMD EPYC 8025P)

SPECrate®2017_int_base = 117

SPECrate®2017_int_peak = 117

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

stepping : 1
microcode : 0xb002162
bugs : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size : 192 4K pages
cpu cores : 8
siblings : 16
1 physical ids (chips)
16 processors (hardware threads)
physical id 0: core ids 0-7
physical id 0: apicids 0-15

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.4:

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 16
On-line CPU(s) list: 0-15
Vendor ID: AuthenticAMD
Model name: AMD EPYC 8025P 8-Core Processor
CPU family: 26
Model: 2
Thread(s) per core: 2
Core(s) per socket: 8
Socket(s): 1
Stepping: 1
BogoMIPS: 5791.41
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect flush_l1d debug_swap hv_inuse_wr_allowed srso_user_kernel_no amd_lbr_pmc_freeze
Virtualization: AMD-V
L1d cache: 384 KiB (8 instances)
L1i cache: 256 KiB (8 instances)
L2 cache: 8 MiB (8 instances)
L3 cache: 64 MiB (2 instances)
NUMA node(s): 2

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.90 GHz, AMD EPYC 8025P)

SPECrate®2017_int_base = 117

SPECrate®2017_int_peak = 117

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

NUMA node0 CPU(s): 0-3,8-11
NUMA node1 CPU(s): 4-7,12-15
Vulnerability Gather data sampling: Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; IBPB on VMEXIT only
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	384K	12	Data	1	64	1	64
L1i	32K	256K	8	Instruction	1	64	1	64
L2	1M	8M	16	Unified	2	1024	1	64
L3	32M	64M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0-3,8-11
node 0 size: 96449 MB
node 0 free: 95931 MB
node 1 cpus: 4-7,12-15
node 1 size: 96675 MB
node 1 free: 95811 MB
node distances:
node 0 1
0: 10 12
1: 12 10

9. /proc/meminfo

MemTotal: 197760312 kB

10. who -r

run-level 3 Jul 7 13:21

11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.90 GHz, AMD EPYC 8025P)

SPECrate®2017_int_base = 117

SPECrate®2017_int_peak = 117

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

enabled-runtime disabled
indirect

lvm2-monitor nsd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore tuned
wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
systemd-remount-fs
NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables
exchange-bmc-os-info firewalld fsidd gnome-remote-desktop gpm grub2-once haveged
hwloc-dump-hwdata ipmi ipmievdev issue-add-ssh-keys kexec-load lunmask man-db-create
multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount ostree-state-overlay@ rpcbind
rpmconfigcheck rsyncd rtkit-daemon samba-bgqd serial-getty@ smartd_generate_opts smb snmpd
snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysextd systemd-time-wait-sync systemd-timesyncd udisks2
update-system-flatpaks upower vncserver@ wpa_supplicant@
pcsd saned@ systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.53.6-default
root=UUID=a5bd0644-2f89-4629-93cd-27eba6a46f18
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info
analyzing CPU 14:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. tuned-adm active
Current active profile: balanced

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1

17. /sys/kernel/mm/transparent_hugepage

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.90 GHz, AMD EPYC 8025P)

SPECrate®2017_int_base = 117

SPECrate®2017_int_peak = 117

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

```
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7
```

```
-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       btrfs 447G  20G  424G   5% /home
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:         HPE
Product:        ProLiant DL145 Gen11
Product Family: ProLiant
Serial:         DL145GEN11
```

```
-----
22. dmidecode
Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  6x Micron MTC20F2085S1RC64BD2 QSFF 32 GB 2 rank 6400
```

```
-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      HPE
BIOS Version:     2.10
BIOS Date:        04/02/2026
BIOS Revision:    2.10
Firmware Revision: 1.60
```

Compiler Version Notes

```
=====
C          | 502.gcc_r(peak)
```

```
-----
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.90 GHz, AMD EPYC 8025P)

SPECrate®2017_int_base = 117

SPECrate®2017_int_peak = 117

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```
C      | 502.gcc_r(peak)
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```
C++    | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
      | 541.leela_r(base, peak)
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```
Fortran | 548.exchange2_r(base, peak)
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.90 GHz, AMD EPYC 8025P)

SPECrate®2017_int_base = 117

SPECrate®2017_int_peak = 117

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather

-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5

-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto

-fstruct-layout=7 -mllvm -unroll-threshold=50

-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining

-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang

-lamdalloc-ext -ldl

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5

-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100

-mllvm -loop-unswitch-threshold=200000

-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie

-fvirtual-function-elimination -fvisibility=hidden

-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext

-ldl

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.90 GHz, AMD EPYC 8025P)

SPECrate®2017_int_base = 117

SPECrate®2017_int_peak = 117

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Base Optimization Flags (Continued)

Fortran benchmarks:

-m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -inline-recursion=4 -Wl, -mllvm -Wl, -lsr-in-nested-loop
-Wl, -mllvm -Wl, -enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fltto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.90 GHz, AMD EPYC 8025P)

SPECrate®2017_int_base = 117

SPECrate®2017_int_peak = 117

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Peak Portability Flags (Continued)

520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: basepeak = yes

525.x264_r: basepeak = yes

557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.90 GHz, AMD EPYC 8025P)

SPECrate®2017_int_base = 117

SPECrate®2017_int_peak = 117

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Peak Optimization Flags (Continued)

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

-m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -inline-recursion=4 -Wl, -mllvm -Wl, -lsr-in-nested-loop
-Wl, -mllvm -Wl, -enable-iv-split -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -flto -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc -ldl

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Sorano-rev1.5.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Sorano-rev1.5.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-07-07 03:52:27-0400.

Report generated on 2026-07-29 10:29:06 by CPU2017 PDF formatter v6716.

Originally published on 2026-07-28.