



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8218-D3 (AMD EPYC 9255)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1060

CPU2017 License: 9087


Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2025

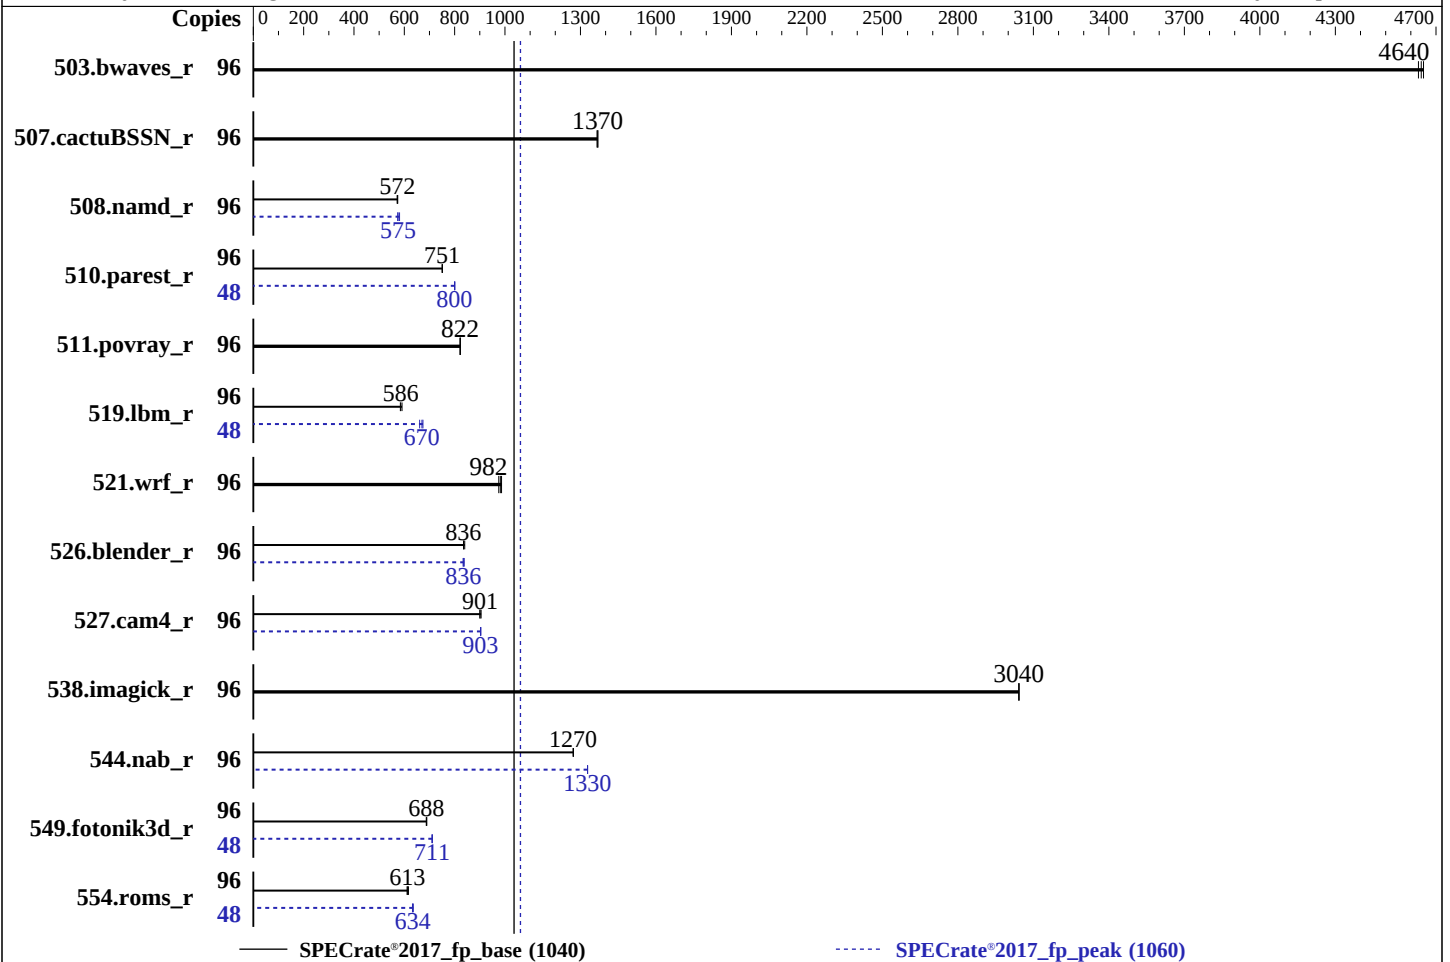

Hardware

CPU Name: AMD EPYC 9255
Max MHz: 4300
Nominal: 3200
Enabled: 48 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 128 MB I+D on chip per chip, 32 MB shared / 6 cores
Other: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 1 x 4 TB NVME SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP7 6.4.0-150700.51-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Version 01.14.00 released Dec-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

QR8218-D3 (AMD EPYC 9255)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1060

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	207	4650	<u>207</u>	<u>4640</u>	208	4630	96	207	4650	<u>207</u>	<u>4640</u>	208	4630
507.cactuBSSN_r	96	<u>88.8</u>	<u>1370</u>	88.8	1370	89.0	1370	96	<u>88.8</u>	<u>1370</u>	88.8	1370	89.0	1370
508.namd_r	96	159	574	<u>159</u>	<u>572</u>	159	572	96	<u>159</u>	<u>575</u>	159	574	157	581
510.parest_r	96	<u>334</u>	<u>751</u>	335	750	334	752	48	<u>157</u>	<u>800</u>	157	800	157	801
511.povray_r	96	272	823	<u>273</u>	<u>822</u>	273	822	96	272	823	<u>273</u>	<u>822</u>	273	822
519.lbm_r	96	171	591	<u>173</u>	<u>586</u>	173	584	48	<u>75.5</u>	<u>670</u>	76.5	661	75.1	674
521.wrf_r	96	218	986	220	975	<u>219</u>	<u>982</u>	96	218	986	220	975	<u>219</u>	<u>982</u>
526.blender_r	96	175	836	174	840	<u>175</u>	<u>836</u>	96	<u>175</u>	<u>836</u>	174	838	175	834
527.cam4_r	96	185	905	187	900	<u>186</u>	<u>901</u>	96	186	905	186	903	<u>186</u>	<u>903</u>
538.imagick_r	96	<u>78.5</u>	<u>3040</u>	78.5	3040	78.5	3040	96	<u>78.5</u>	<u>3040</u>	78.5	3040	78.5	3040
544.nab_r	96	127	1270	127	1270	<u>127</u>	<u>1270</u>	96	<u>122</u>	<u>1330</u>	122	1330	122	1330
549.fotonik3d_r	96	<u>544</u>	<u>688</u>	544	687	543	689	48	263	711	<u>263</u>	<u>711</u>	263	711
554.roms_r	96	250	611	247	616	<u>249</u>	<u>613</u>	48	120	635	121	632	<u>120</u>	<u>634</u>

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1060

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

Tuned service was stopped using 'systemctl stop tuned'

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

QR8218-D3 (AMD EPYC 9255)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1060

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2025

Operating System Notes (Continued)

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/CPU2017/amd_rate_aocc500_znver5_A_lib/lib:/home/CPU2017/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

NUMA nodes per socket = NPS4

Determinism Slider = Power

CTDP Control = Manual

CTDP = 500

Package Power Limit Control = Manual

Package Power Limit = 500

Sysinfo program /home/CPU2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Sat Jun 20 00:45:31 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

-
1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8218-D3 (AMD EPYC 9255)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1060

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2025

Platform Notes (Continued)

```
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. systemctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS
```

```
1. uname -a
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
00:45:31 up 4:29, 1 user, load average: 61.17, 87.07, 92.03
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1      -             20:57    3:47m  0.91s  0.15s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 6190573
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 6190573
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.115/temlogs/preenv.fprate.115.0.log --lognum 115.0 --from_runcpu 2
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8218-D3 (AMD EPYC 9255)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1060

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2025

Platform Notes (Continued)

```
specperl $SPEC/bin/sysinfo  
$SPEC = /home/CPU2017
```

```
-----  
6. /proc/cpuinfo  
model name      : AMD EPYC 9255 24-Core Processor  
vendor_id       : AuthenticAMD  
cpu family      : 26  
model           : 2  
stepping        : 1  
microcode       : 0xb00215a  
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso  
TLB size        : 192 4K pages  
cpu cores       : 24  
siblings        : 48  
2 physical ids (chips)  
96 processors (hardware threads)  
physical id 0: core ids 0-5,8-13,16-21,24-29  
physical id 1: core ids 0-5,8-13,16-21,24-29  
physical id 0: apicids 0-11,16-27,32-43,48-59  
physical id 1: apicids 64-75,80-91,96-107,112-123  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for  
virtualized systems. Use the above data carefully.
```

7. lscpu

From lscpu from util-linux 2.40.4:

```
Architecture:          x86_64  
CPU op-mode(s):        32-bit, 64-bit  
Address sizes:          52 bits physical, 57 bits virtual  
Byte Order:             Little Endian  
CPU(s):                 96  
On-line CPU(s) list:   0-95  
Vendor ID:              AuthenticAMD  
Model name:             AMD EPYC 9255 24-Core Processor  
CPU family:             26  
Model:                  2  
Thread(s) per core:     2  
Core(s) per socket:     24  
Socket(s):              2  
Stepping:               1  
Frequency boost:        enabled  
CPU(s) scaling MHz:     106%  
CPU max MHz:            3200.0000  
CPU min MHz:            1500.0000  
BogoMIPS:               6390.44  
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat  
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb  
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid  
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid  
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm  
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch  
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext  
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2  
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2  
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap  
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt  
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total  
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8218-D3 (AMD EPYC 9255)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1060

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2025

Platform Notes (Continued)

xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
svm_lock nrp_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_l1d debug_swap hv_inuse_wr_allowed srso_user_kernel_no
amd_lbr_pmc_freeze

Virtualization:

L1d cache: AMD-V
L1i cache: 2.3 MiB (48 instances)
L2 cache: 1.5 MiB (48 instances)
L3 cache: 48 MiB (48 instances)
256 MiB (8 instances)

NUMA node(s): 8
NUMA node0 CPU(s): 0-5,48-53
NUMA node1 CPU(s): 6-11,54-59
NUMA node2 CPU(s): 12-17,60-65
NUMA node3 CPU(s): 18-23,66-71
NUMA node4 CPU(s): 24-29,72-77
NUMA node5 CPU(s): 30-35,78-83
NUMA node6 CPU(s): 36-41,84-89
NUMA node7 CPU(s): 42-47,90-95

Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; IBPB on VMEXIT only
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP

always-on; RSB filling; PBRB-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-5,48-53
node 0 size: 193055 MB
node 0 free: 192460 MB
node 1 cpus: 6-11,54-59
node 1 size: 193532 MB
node 1 free: 192989 MB
node 2 cpus: 12-17,60-65
node 2 size: 193532 MB
node 2 free: 192978 MB
node 3 cpus: 18-23,66-71
node 3 size: 193532 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8218-D3 (AMD EPYC 9255)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1060

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2025

Platform Notes (Continued)

```
node 3 free: 193002 MB
node 4 cpus: 24-29,72-77
node 4 size: 193494 MB
node 4 free: 192960 MB
node 5 cpus: 30-35,78-83
node 5 size: 193532 MB
node 5 free: 192992 MB
node 6 cpus: 36-41,84-89
node 6 size: 193532 MB
node 6 free: 193028 MB
node 7 cpus: 42-47,90-95
node 7 size: 193457 MB
node 7 free: 192842 MB
node distances:
node  0  1  2  3  4  5  6  7
 0: 10 12 12 12 32 32 32 32
 1: 12 10 12 12 32 32 32 32
 2: 12 12 10 12 32 32 32 32
 3: 12 12 12 10 32 32 32 32
 4: 32 32 32 32 10 12 12 12
 5: 32 32 32 32 12 10 12 12
 6: 32 32 32 32 12 12 10 12
 7: 32 32 32 32 12 12 12 10
```

9. /proc/meminfo

MemTotal: 1584814556 kB

10. who -r

run-level 3 Jun 19 20:16

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* logrotate.service	loaded	failed	failed	Rotate log files

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections nvmmf-autoconnect postfix purge-kernels rollback rsyslog smartd systemd-pstore
enabled-runtime	systemd-remount-fs
disabled	autofs autotast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd sshd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd tuned udisks2 vncserver@ wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny systemd-userdbd wickedd
indirect	

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.
QR8218-D3 (AMD EPYC 9255)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1060

CPU2017 License: 9087

Test Sponsor: Maginfraco., Ltd.

Tested by: Maginfraco., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2025

Platform Notes (Continued)

14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default  
root=UUID=b599d87c-474e-4c72-b781-36d0bcdcf18d  
splash=silent  
mitigations=auto  
quiet  
security=apparmor
```

15. cpupower frequency-info

```
analyzing CPU 86:  
current policy: frequency should be within 1.50 GHz and 3.20 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes
```

16. tuned-adm active

```
It seems that tuned daemon is not running, preset profile is not activated.  
Preset profile: throughput-performance
```

17. sysctl

```
kernel.numa_balancing          1  
kernel.randomize_va_space      0  
vm.compaction_proactiveness    20  
vm.dirty_background_bytes      0  
vm.dirty_background_ratio      10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs      3000  
vm.dirty_ratio                 8  
vm.dirty_writeback_centisecs   500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold           500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy      0  
vm.nr_overcommit_hugepages     0  
vm.swappiness                   1  
vm.watermark_boost_factor      15000  
vm.watermark_scale_factor      10  
vm.zone_reclaim_mode           1
```

18. /sys/kernel/mm/transparent_hugepage

```
defrag      [always] defer defer+madvice madvice never  
enabled     [always] madvice never  
hpage_pmd_size 2097152  
shmem_enabled always within_size advise [never] deny force
```

19. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000  
defrag                1  
max_ptes_none         511  
max_ptes_shared       256  
max_ptes_swap         64  
pages_to_scan         4096
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8218-D3 (AMD EPYC 9255)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1060

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2025

Platform Notes (Continued)

scan_sleep_millisecs 10000

20. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7

21. Disk information

SPEC is set to: /home/CPU2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 xfs 929G 40G 889G 5% /

22. /sys/devices/virtual/dmi/id

Vendor: Maginfra
Product: QR8218-D3
Product Family: Not specified
Serial: 00000000

23. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400
11x Samsung M321R8GA0PB2-CCPPC 64 GB 2 rank 6400
1x Samsung M321R8GA0PB2-CCPWC 64 GB 2 rank 6400

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 01.14.00
BIOS Date: 12/25/2025

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8218-D3 (AMD EPYC 9255)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1060

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2025

Compiler Version Notes (Continued)

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

Base Compiler Invocation

C benchmarks:
clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

QR8218-D3 (AMD EPYC 9255)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1060

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2025

Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

SPECrate®2017_fp_base = 1040

QR8218-D3 (AMD EPYC 9255)

SPECrate®2017_fp_peak = 1060

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2025

Base Optimization Flags (Continued)

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

QR8218-D3 (AMD EPYC 9255)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1060

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2025

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdalloc -lflang -ldl
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

QR8218-D3 (AMD EPYC 9255)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1060

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2025

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

538.imagick_r: basepeak = yes

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

SPECrate®2017_fp_base = 1040

QR8218-D3 (AMD EPYC 9255)

SPECrate®2017_fp_peak = 1060

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2025

Peak Optimization Flags (Continued)

508.namd_r (continued):

```
-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

```
510.parest_r: -m64 -std=c++14 -flto -Wl, -mllvm -Wl, -suppress-fmas
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

```
549.fotonik3d_r: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang
```

```
554.roms_r: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -ldl -lflang
```

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

```
527.cam4_r: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

QR8218-D3 (AMD EPYC 9255)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1060

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2025

Peak Optimization Flags (Continued)

527.cam4_r (continued):

-ldl -lflang

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast

-march=znver5 -fveclib=AMDLIBM -ffast-math -flto

-fstruct-layout=7 -mllvm -unroll-threshold=50

-fremap-arrays -fstrip-mining

-mllvm -inline-threshold=1000

-mllvm -reduce-array-computations=3 -zopt

-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

QR8218-D3 (AMD EPYC 9255)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1060

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Apr-2025

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Maginfra-Platform-Settings-amd-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Maginfra-Platform-Settings-amd-V1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-06-20 00:45:31-0400.

Report generated on 2026-07-30 16:38:11 by CPU2017 PDF formatter v6716.

Originally published on 2026-07-30.