



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8218-T3(Intel Xeon 6787P)

SPECrate®2017_fp_base = 1770

SPECrate®2017_fp_peak = 1850

CPU2017 License: 9087


Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Feb-2026

Software Availability: Jun-2025

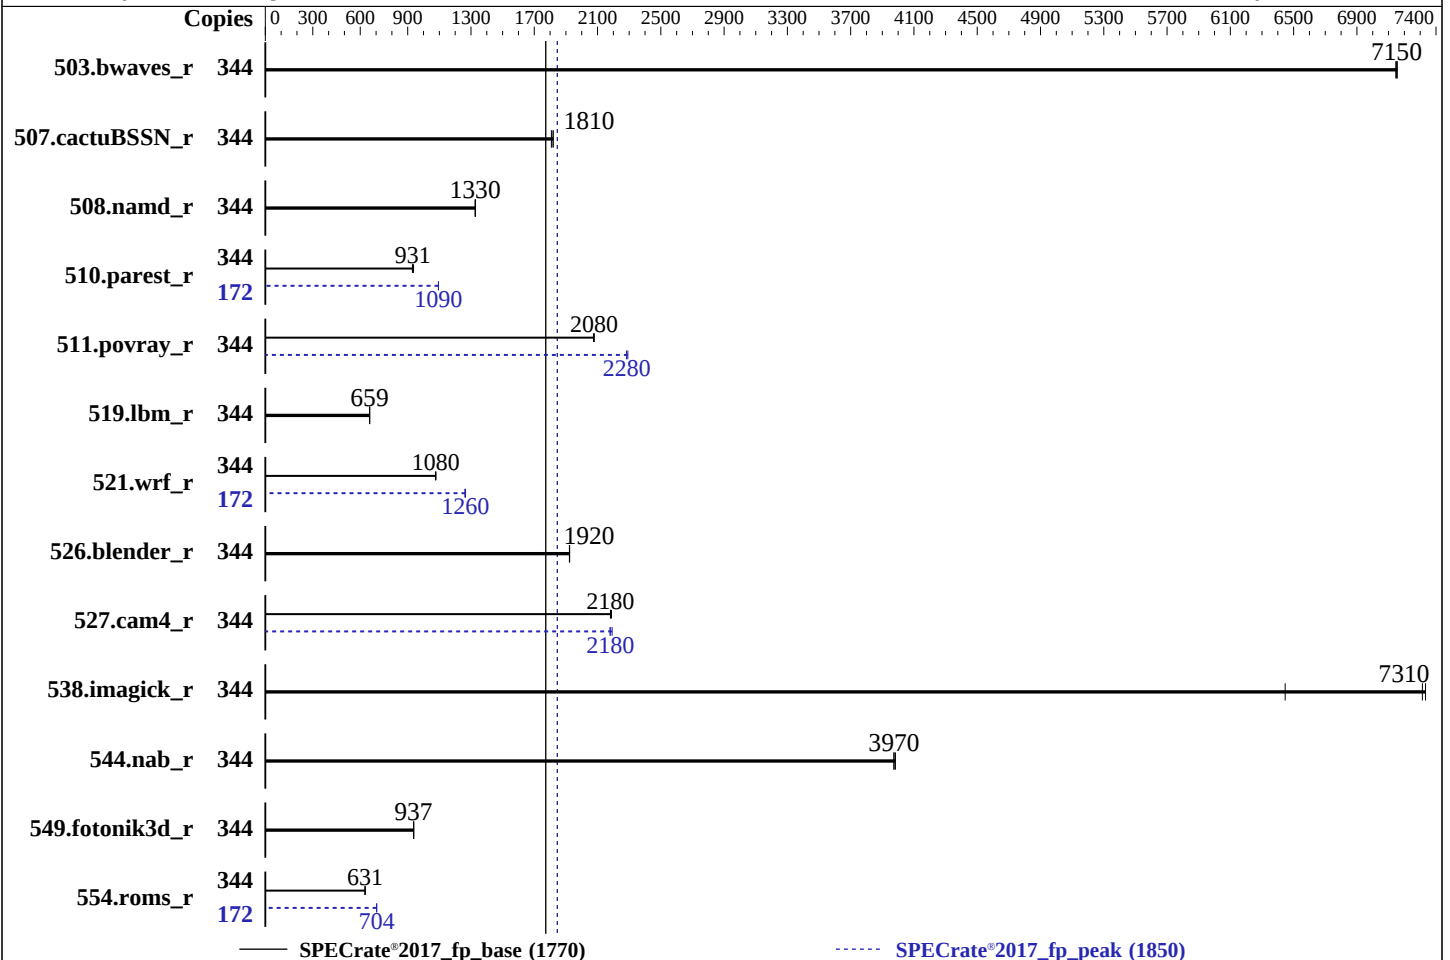

Hardware

CPU Name: Intel Xeon 6787P
Max MHz: 3800
Nominal: 2000
Enabled: 172 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 336 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-88/64B-H, running at 8000)
Storage: 1 x 1 TB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6 6.4.0-150600.21-default
Compiler: C/C++: Version 2025.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2025.2 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 05.00.00 released Feb-2026
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8218-T3(Intel Xeon 6787P)

SPECrate®2017_fp_base = 1770

SPECrate®2017_fp_peak = 1850

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Feb-2026

Software Availability: Jun-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	344	482	7150	483	7150	482	7160	344	482	7150	483	7150	482	7160
507.cactuBSSN_r	344	239	1820	241	1810	240	1810	344	239	1820	241	1810	240	1810
508.namd_r	344	246	1330	246	1330	246	1330	344	246	1330	246	1330	246	1330
510.parest_r	344	966	931	961	937	968	930	172	411	1090	411	1090	411	1090
511.povray_r	344	387	2070	387	2080	386	2080	344	351	2290	352	2280	352	2280
519.lbm_r	344	550	659	550	659	550	659	344	550	659	550	659	550	659
521.wrf_r	344	715	1080	716	1080	715	1080	172	305	1260	304	1270	305	1260
526.blender_r	344	273	1920	273	1920	272	1920	344	273	1920	273	1920	272	1920
527.cam4_r	344	276	2180	275	2190	276	2180	344	276	2180	274	2190	276	2180
538.imagick_r	344	117	7310	133	6450	117	7330	344	117	7310	133	6450	117	7330
544.nab_r	344	146	3970	146	3970	145	3980	344	146	3970	146	3970	145	3980
549.fotonik3d_r	344	1431	937	1430	937	1428	939	344	1431	937	1430	937	1428	939
554.roms_r	344	868	630	866	631	866	631	172	388	704	388	704	389	703

SPECrate®2017_fp_base = 1770

SPECrate®2017_fp_peak = 1850

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
Tuned-adm profile was set to throughput-performance using 'tuned-adm profile throughput-performance'

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8218-T3(Intel Xeon 6787P)

SPECrate®2017_fp_base = 1770

SPECrate®2017_fp_peak = 1850

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Feb-2026

Software Availability: Jun-2025

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

ENERGY_PERF_BIAS_CFG mode = Performance

SNC = Enable

Latency Optimized Mode = Enable

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Fri Jul 3 02:43:12 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

2. w
02:43:12 up 5:52, 1 user, load average: 208.23, 308.05, 327.31
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8218-T3(Intel Xeon 6787P)

SPECrate®2017_fp_base = 1770

SPECrate®2017_fp_peak = 1850

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Feb-2026

Software Availability: Jun-2025

Platform Notes (Continued)

```
root      tty1      -                20:51    5:50m  1.14s  0.02s -bash
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4125606
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4125606
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=344 -c
ic2025.2-lin-graniterapids-rate-20250605.cfg --define smt-on --define cores=172 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=344 --configfile
ic2025.2-lin-graniterapids-rate-20250605.cfg --define smt-on --define cores=172 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.007/temlogs/preenv.fprate.007.0.log --lognum 007.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6787P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 173
stepping        : 1
microcode       : 0x1000405
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores       : 86
siblings        : 172
2 physical ids (chips)
344 processors (hardware threads)
physical id 0:  core ids 0-42,64-106
physical id 1:  core ids 0-42,64-106
physical id 0:  apicids 0-85,128-213
physical id 1:  apicids 256-341,384-469
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.
QR8218-T3(Intel Xeon 6787P)

SPECrate®2017_fp_base = 1770

SPECrate®2017_fp_peak = 1850

CPU2017 License: 9087

Test Sponsor: Maginfraco., Ltd.

Tested by: Maginfraco., Ltd.

Test Date: Jul-2026

Hardware Availability: Feb-2026

Software Availability: Jun-2025

Platform Notes (Continued)

virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	344
On-line CPU(s) list:	0-343
Vendor ID:	GenuineIntel
BIOS Vendor ID:	Intel(R) Corporation
Model name:	Intel(R) Xeon(R) 6787P
BIOS Model name:	Intel(R) Xeon(R) 6787P CPU @ 2.0GHz
BIOS CPU family:	179
CPU family:	6
Model:	173
Thread(s) per core:	2
Core(s) per socket:	86
Socket(s):	2
Stepping:	1
Frequency boost:	enabled
CPU(s) scaling MHz:	102%
CPU max MHz:	2001.0000
CPU min MHz:	800.0000
BogoMIPS:	4000.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
L1d cache:	8.1 MiB (172 instances)
L1i cache:	10.8 MiB (172 instances)
L2 cache:	344 MiB (172 instances)
L3 cache:	672 MiB (2 instances)
NUMA node(s):	4
NUMA node0 CPU(s):	0-42,172-214
NUMA node1 CPU(s):	43-85,215-257
NUMA node2 CPU(s):	86-128,258-300
NUMA node3 CPU(s):	129-171,301-343
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8218-T3(Intel Xeon 6787P)

SPECrate®2017_fp_base = 1770

SPECrate®2017_fp_peak = 1850

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Feb-2026

Software Availability: Jun-2025

Platform Notes (Continued)

Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	8.1M	12	Data	1	64	1	64
L1i	64K	10.8M	16	Instruction	1	64	1	64
L2	2M	344M	16	Unified	2	2048	1	64
L3	336M	672M	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0-42,172-214
node 0 size: 257470 MB
node 0 free: 220339 MB
node 1 cpus: 43-85,215-257
node 1 size: 257986 MB
node 1 free: 225481 MB
node 2 cpus: 86-128,258-300
node 2 size: 258025 MB
node 2 free: 225390 MB
node 3 cpus: 129-171,301-343
node 3 size: 257944 MB
node 3 free: 225480 MB
node distances:
node 0 1 2 3
0: 10 12 21 21
1: 12 10 21 21
2: 21 21 10 12
3: 21 21 12 10

9. /proc/meminfo

MemTotal: 1056182060 kB

10. who -r

run-level 3 Jul 2 20:51

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nsd nvme-fc-boot-connections

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8218-T3(Intel Xeon 6787P)

SPECrate®2017_fp_base = 1770

SPECrate®2017_fp_peak = 1850

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Feb-2026

Software Availability: Jun-2025

Platform Notes (Continued)

enabled-runtime nvme-autoconnect postfix purge-kernels rollback rsyslog smartd systemd-pstore
disabled systemd-remount-fs
autofs autostart-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged ipmi ipmiev issue-add-ssh-keys kexec-load lunmask
man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
smartd_generate_opts snmpd snmptrapd sshd systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
udisks2 vncserver@ wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
indirect systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=ba4bfa5e-dc24-4c3d-b870-9f7f871bf07a
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info

analyzing CPU 214:
current policy: frequency should be within 800 MHz and 2.00 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. tuned-adm active

Current active profile: throughput-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	10
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

17. /sys/kernel/mm/transparent_hugepage

defrag always defer defer+madvice [madvice] never
enabled [always] madvice never

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8218-T3(Intel Xeon 6787P)

SPECrate®2017_fp_base = 1770

SPECrate®2017_fp_peak = 1850

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Feb-2026

Software Availability: Jun-2025

Platform Notes (Continued)

hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 xfs 929G 266G 664G 29% /

21. /sys/devices/virtual/dmi/id
Vendor: Maginfra
Product: QR8218-T3
Product Family: Not specified
Serial: 00000000

22. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
4x Hynix HMC94BDJHA380N 64 GB 2 rank 8800, configured at 8000
4x Hynix HMC94BDJHA383N 64 GB 2 rank 8800, configured at 8000
5x Hynix HMC94BDJHA462N 64 GB 2 rank 8800, configured at 8000
3x Hynix HMC94BDJHA464N 64 GB 2 rank 8800, configured at 8000

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 05.00.00
BIOS Date: 02/26/2026

Compiler Version Notes

=====

C	519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
---	---

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8218-T3(Intel Xeon 6787P)

SPECrate®2017_fp_base = 1770

SPECrate®2017_fp_peak = 1850

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Feb-2026

Software Availability: Jun-2025

Compiler Version Notes (Continued)

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

QR8218-T3(Intel Xeon 6787P)

SPECrate®2017_fp_base = 1770

SPECrate®2017_fp_peak = 1850

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Feb-2026

Software Availability: Jun-2025

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xgraniterapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8218-T3(Intel Xeon 6787P)

SPECrate®2017_fp_base = 1770

SPECrate®2017_fp_peak = 1850

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Feb-2026

Software Availability: Jun-2025

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8218-T3(Intel Xeon 6787P)

SPECrate®2017_fp_base = 1770

SPECrate®2017_fp_peak = 1850

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Feb-2026

Software Availability: Jun-2025

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xgraniterapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xgraniterapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8218-T3(Intel Xeon 6787P)

SPECrate®2017_fp_base = 1770

SPECrate®2017_fp_peak = 1850

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jul-2026

Hardware Availability: Feb-2026

Software Availability: Jun-2025

Peak Optimization Flags (Continued)

511.povray_r (continued):

```
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Maginfra-Platform-Settings-intel-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Maginfra-Platform-Settings-intel-V1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-07-03 02:43:12-0400.

Report generated on 2026-07-30 16:38:13 by CPU2017 PDF formatter v6716.

Originally published on 2026-07-30.