



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.95 GHz, AMD EPYC 8225P)

SPECrate®2017_fp_base = 371

SPECrate®2017_fp_peak = 371

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

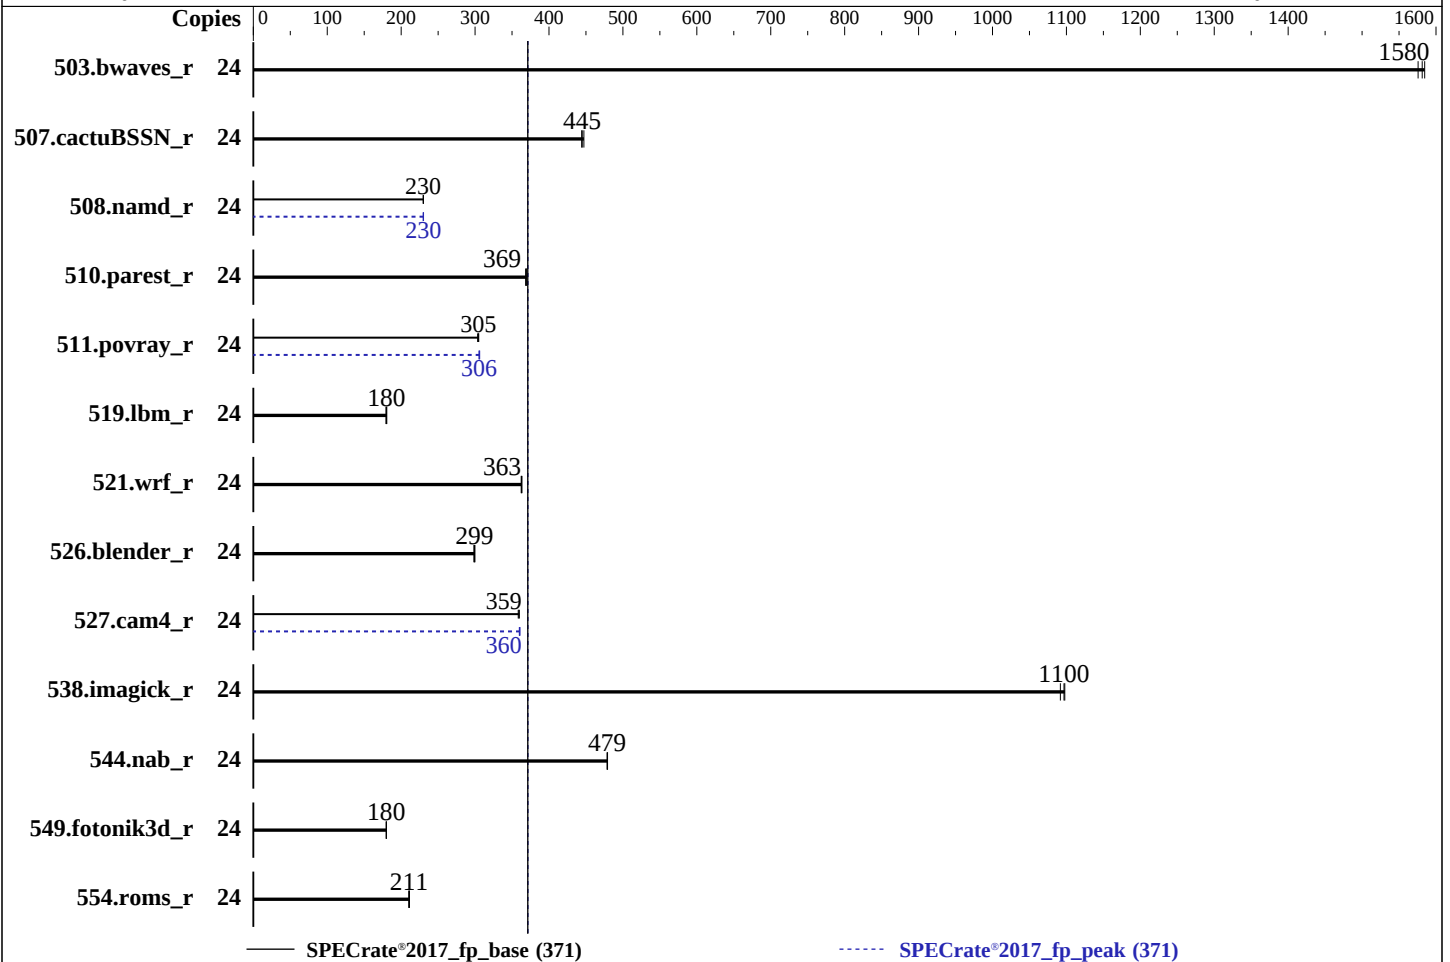

Hardware

CPU Name: AMD EPYC 8225P
Max MHz: 4500
Nominal: 2950
Enabled: 24 cores, 1 chip
Orderable: 1 Chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 128 MB I+D on chip per chip,
32 MB shared / 6 cores
Other: None
Memory: 192 GB (6 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 1 x 480 GB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP7
Kernel 6.4.0-150700.53.6-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: HPE BIOS Version v2.10 04/02/2026
released Apr-2026
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.95 GHz, AMD EPYC 8225P)

SPECrate®2017_fp_base = 371

SPECrate®2017_fp_peak = 371

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	24	153	1580	<u>152</u>	<u>1580</u>	152	1580	24	153	1580	<u>152</u>	<u>1580</u>	152	1580
507.cactuBSSN_r	24	67.9	447	<u>68.3</u>	<u>445</u>	68.4	444	24	67.9	447	<u>68.3</u>	<u>445</u>	68.4	444
508.namd_r	24	99.1	230	<u>99.1</u>	<u>230</u>	99.1	230	24	99.0	230	99.2	230	<u>99.1</u>	<u>230</u>
510.parest_r	24	170	370	170	368	<u>170</u>	<u>369</u>	24	170	370	170	368	<u>170</u>	<u>369</u>
511.povray_r	24	185	303	<u>184</u>	<u>305</u>	184	305	24	<u>183</u>	<u>306</u>	183	305	183	306
519.lbm_r	24	140	180	141	179	<u>140</u>	<u>180</u>	24	140	180	141	179	<u>140</u>	<u>180</u>
521.wrf_r	24	<u>148</u>	<u>363</u>	148	362	148	363	24	<u>148</u>	<u>363</u>	148	362	148	363
526.blender_r	24	123	298	122	300	<u>122</u>	<u>299</u>	24	123	298	122	300	<u>122</u>	<u>299</u>
527.cam4_r	24	117	358	117	360	<u>117</u>	<u>359</u>	24	<u>117</u>	<u>360</u>	117	360	116	361
538.imagick_r	24	<u>54.4</u>	<u>1100</u>	54.7	1090	54.4	1100	24	<u>54.4</u>	<u>1100</u>	54.7	1090	54.4	1100
544.nab_r	24	<u>84.4</u>	<u>479</u>	84.3	479	84.4	479	24	<u>84.4</u>	<u>479</u>	84.3	479	84.4	479
549.fotonik3d_r	24	520	180	519	180	<u>520</u>	<u>180</u>	24	520	180	519	180	<u>520</u>	<u>180</u>
554.roms_r	24	181	210	181	211	<u>181</u>	<u>211</u>	24	181	210	181	211	<u>181</u>	<u>211</u>

SPECrate®2017_fp_base = 371

SPECrate®2017_fp_peak = 371

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.95 GHz, AMD EPYC 8225P)

SPECrate®2017_fp_base = 371

SPECrate®2017_fp_peak = 371

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

tuned-adm profile was set to throughput-performance using 'tuned-adm profile throughput-performance'

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB

Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Throughput Compute

AMD SMT Option set to Disabled

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

NUMA memory domains per socket set to Two memory domains per socket

Thermal Configuration set to Maximum Cooling

Package Power Limit Control Mode set to Manual

Package Power Limit Value set to 225

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Fri Jun 19 08:37:41 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

-
1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.95 GHz, AMD EPYC 8225P)

SPECrate®2017_fp_base = 371

SPECrate®2017_fp_peak = 371

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

```
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
```

```
1. uname -a
Linux localhost 6.4.0-150700.53.6-default #1 SMP PREEMPT_DYNAMIC Tue Jul 1 14:54:47 UTC 2025 (8ab7501)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
08:37:41 up 1 min, 3 users, load average: 0.47, 0.17, 0.06
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) 0
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 772366
max locked memory        (kbytes, -l) 2097152
max memory size          (kbytes, -m) unlimited
open files              (-n) 999999
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes      (-u) unlimited
virtual memory           (kbytes, -v) unlimited
file locks               (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash $SPEC/run_fprate_sh.sh
sudo ./run_fprate.py
python3 ./run_fprate.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.95 GHz, AMD EPYC 8225P)

SPECrate®2017_fp_base = 371

SPECrate®2017_fp_peak = 371

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

```
$SPEC/tmp/CPU2017.003/temlogs/preenv.fprate.003.0.log --lognum 003.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 8225P 24-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping         : 1
microcode        : 0xb002162
bugs             : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass rsrso
TLB size        : 192 4K pages
cpu cores        : 24
siblings         : 24
1 physical ids (chips)
24 processors (hardware threads)
physical id 0: core ids 0-5,8-13,16-21,24-29
physical id 0: apicids 0-5,8-13,16-21,24-29
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.4:

```
Architecture:          x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 24
On-line CPU(s) list:    0-23
Vendor ID:              AuthenticAMD
Model name:             AMD EPYC 8225P 24-Core Processor
CPU family:             26
Model:                  2
Thread(s) per core:     1
Core(s) per socket:     24
Socket(s):              1
Stepping:               1
BogoMIPS:               5890.54
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                        pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
                        pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl
                        nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq
                        monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave
                        avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm
                        sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                        hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced
                        vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                        rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                        avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
                        cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk
                        avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
                        amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock nrip_save
                        tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                        pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                        avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.95 GHz, AMD EPYC 8225P)

SPECrate®2017_fp_base = 371

SPECrate®2017_fp_peak = 371

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

Virtualization:

L1d cache:

L1i cache:

L2 cache:

L3 cache:

NUMA node(s):

NUMA node0 CPU(s):

NUMA node1 CPU(s):

Vulnerability Gather data sampling:

Vulnerability Indirect target selection:

Vulnerability Itlb multihit:

Vulnerability L1tf:

Vulnerability Mds:

Vulnerability Meltdown:

Vulnerability Mmio stale data:

Vulnerability Reg file data sampling:

Vulnerability Retbleed:

Vulnerability Spec rstack overflow:

Vulnerability Spec store bypass:

Vulnerability Spectre v1:

Vulnerability Spectre v2:

Vulnerability Srbds:

Vulnerability Tsx async abort:

avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
bus_lock_detect movdiri movdir64b overflow_recov succor smca fsmr
avx512_vp2intersect flush_l1d debug_swap hv_inuse_wr_allowed
srso_user_kernel_no amd_lbr_pmc_freeze

AMD-V

1.1 MiB (24 instances)

768 KiB (24 instances)

24 MiB (24 instances)

128 MiB (4 instances)

2

0-11

12-23

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Mitigation; IBPB on VMEXIT only

Mitigation; Speculative Store Bypass disabled via prctl

Mitigation; usercopy/swaps barriers and __user pointer

sanitization

Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP

disabled; PBRSE-eIBRS Not affected; BHI Not affected

Not affected

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.1M	12	Data	1	64	1	64
L1i	32K	768K	8	Instruction	1	64	1	64
L2	1M	24M	16	Unified	2	1024	1	64
L3	32M	128M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-11

node 0 size: 96448 MB

node 0 free: 95887 MB

node 1 cpus: 12-23

node 1 size: 96672 MB

node 1 free: 95801 MB

node distances:

node 0 1

0: 10 12

1: 12 10

9. /proc/meminfo

MemTotal: 197755872 kB

10. who -r

run-level 3 Jun 19 08:37

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.95 GHz, AMD EPYC 8225P)

SPECrate®2017_fp_base = 371

SPECrate®2017_fp_peak = 371

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
-------	------------

enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nsd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore tuned wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime	systemd-remount-fs
disabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info firewalld fsidd gnome-remote-desktop gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievdev issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount ostree-state-overlay@ rpcbind rpmconfigcheck rsyncd rtkit-daemon samba-bgqd serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@
indirect	pcscd saned@ systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.53.6-default
root=UUID=3b2a6c4c-85d4-4fc4-a0f9-42d5898806b6
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info

analyzing CPU 11:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. tuned-adm active

Current active profile: throughput-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.95 GHz, AMD EPYC 8225P)

SPECrate®2017_fp_base = 371

SPECrate®2017_fp_peak = 371

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

```
vm.nr_hugepages          0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness             1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode      1
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
-----
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7
-----
```

```
-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       btrfs 447G  21G  423G   5% /home
-----
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:          HPE
Product:         ProLiant DL145 Gen11
Product Family:  ProLiant
Serial:          41600016J0A1
-----
```

```
-----
22. dmidecode
Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  4x Micron MTC20F2085S1RC64BD2 MWFF 32 GB 2 rank 6400
  2x Micron MTC20F2085S1RC64BD2 QSFF 32 GB 2 rank 6400
-----
```

```
-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      HPE
BIOS Version:     2.10
BIOS Date:        04/02/2026
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.95 GHz, AMD EPYC 8225P)

SPECrate®2017_fp_base = 371

SPECrate®2017_fp_peak = 371

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

BIOS Revision: 2.10

Firmware Revision: 1.76

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.95 GHz, AMD EPYC 8225P)

SPECrate®2017_fp_base = 371

SPECrate®2017_fp_peak = 371

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

526.blender_r: -funsigned-char -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.95 GHz, AMD EPYC 8225P)

SPECrate®2017_fp_base = 371

SPECrate®2017_fp_peak = 371

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Base Portability Flags (Continued)

527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.95 GHz, AMD EPYC 8225P)

SPECrate®2017_fp_base = 371

SPECrate®2017_fp_peak = 371

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang  
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdalloc -lflang -ldl
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.95 GHz, AMD EPYC 8225P)

SPECrate®2017_fp_base = 371

SPECrate®2017_fp_peak = 371

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Base Other Flags (Continued)

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.95 GHz, AMD EPYC 8225P)

SPECrate®2017_fp_base = 371

SPECrate®2017_fp_peak = 371

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Peak Optimization Flags (Continued)

544.nab_r: basepeak = yes

C++ benchmarks:

```
508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

```
527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang
```

Benchmarks using both C and C++:

```
511.povray_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.95 GHz, AMD EPYC 8225P)

SPECrate®2017_fp_base = 371

SPECrate®2017_fp_peak = 371

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Peak Optimization Flags (Continued)

511.povray_r (continued):

```
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt  
-mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm  
-lamdalloc -ldl
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Sorano-rev1.5.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Sorano-rev1.5.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.95 GHz, AMD EPYC 8225P)

SPECrate®2017_fp_base = 371

SPECrate®2017_fp_peak = 371

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-06-18 23:07:41-0400.

Report generated on 2026-08-11 18:22:06 by CPU2017 PDF formatter v6716.

Originally published on 2026-08-11.