



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECrate®2017_int_base = 413

SPECrate®2017_int_peak = 415

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

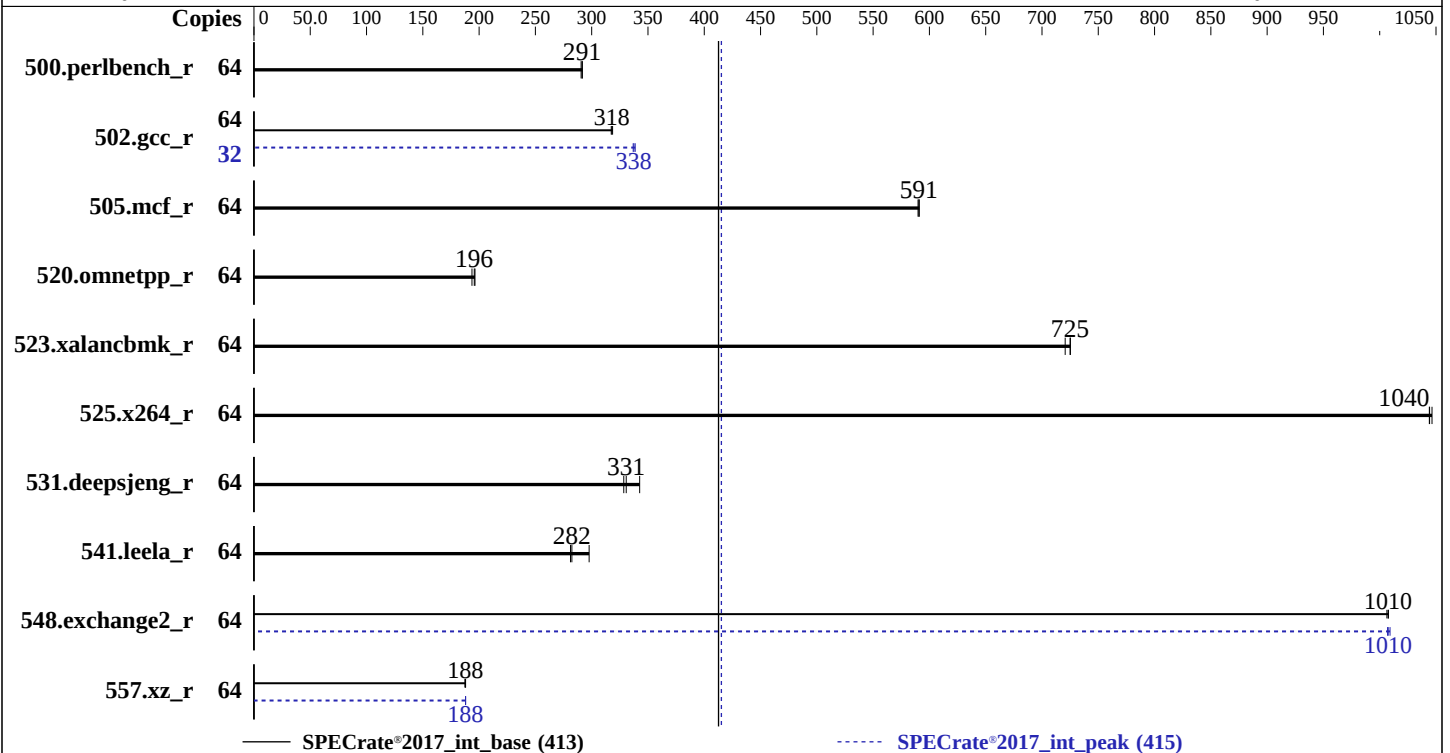

Hardware

CPU Name: AMD EPYC 8325P
Max MHz: 4500
Nominal: 2700
Enabled: 32 cores, 1 chip, 2 threads/core
Orderable: 1 Chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip,
32 MB shared / 4 cores
Other: None
Memory: 192 GB (6 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 1 x 960 GB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP7
Kernel 6.4.0-150700.53.6-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: HPE BIOS Version v2.10 04/02/2026
released Apr-2026
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: None
Power Management: BIOS set to prefer performance at the
cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECrate®2017_int_base = 413

SPECrate®2017_int_peak = 415

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	350	291	349	292	351	291	64	350	291	349	292	351	291
502.gcc_r	64	285	318	284	319	286	317	32	134	339	135	337	134	338
505.mcf_r	64	175	590	175	591	175	591	64	175	590	175	591	175	591
520.omnetpp_r	64	428	196	429	196	434	194	64	428	196	429	196	434	194
523.xalancbmk_r	64	93.8	721	93.2	725	93.2	725	64	93.8	721	93.2	725	93.2	725
525.x264_r	64	107	1040	107	1040	107	1050	64	107	1040	107	1040	107	1050
531.deepsjeng_r	64	214	343	223	329	222	331	64	214	343	223	329	222	331
541.leela_r	64	356	298	377	281	375	282	64	356	298	377	281	375	282
548.exchange2_r	64	166	1010	167	1010	166	1010	64	167	1010	166	1010	166	1010
557.xz_r	64	368	188	369	187	368	188	64	368	188	368	188	368	188

SPECrate®2017_int_base = 413

SPECrate®2017_int_peak = 415

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
tuned-adm profile was set to balanced using 'tuned-adm profile balanced'



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECrate®2017_int_base = 413

SPECrate®2017_int_peak = 415

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB

Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Throughput Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

NUMA memory domains per socket set to Two memory domains per socket

Thermal Configuration set to Maximum Cooling

Package Power Limit Control Mode set to Manual

Package Power Limit Value set to 225

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Fri Jun 19 04:00:34 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECrate®2017_int_base = 413

SPECrate®2017_int_peak = 415

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

22. dmidecode

23. BIOS

1. uname -a

```
Linux localhost 6.4.0-150700.53.6-default #1 SMP PREEMPT_DYNAMIC Tue Jul 1 14:54:47 UTC 2025 (8ab7501)
x86_64 x86_64 x86_64 GNU/Linux
```

2. w

```
04:00:34 up 1 min, 3 users, load average: 0.26, 0.12, 0.04
USER      TTY      FROM      LOGIN@   IDLE   JCPU   PCPU WHAT
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) 0
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 772256
max locked memory        (kbytes, -l) 2097152
max memory size          (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes       (-u) 772256
virtual memory           (kbytes, -v) unlimited
file locks               (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash $SPEC/run_intrate_sh.sh
sudo ./run_intrate.py
python3 ./run_intrate.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templots/preenv.intrate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 8325P 32-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECrate®2017_int_base = 413

SPECrate®2017_int_peak = 415

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

stepping : 1
microcode : 0xb002162
bugs : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size : 192 4K pages
cpu cores : 32
siblings : 64
1 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-31
physical id 0: apicids 0-63

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 64
On-line CPU(s) list:    0-63
Vendor ID:              AuthenticAMD
Model name:             AMD EPYC 8325P 32-Core Processor
CPU family:             26
Model:                  2
Thread(s) per core:     2
Core(s) per socket:     32
Socket(s):              1
Stepping:               1
BogoMIPS:               5391.37
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                        pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
                        pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl
                        nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq
                        monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave
                        avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm
                        sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                        hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced
                        vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                        rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                        avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
                        cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk
                        avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
                        amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock nrip_save
                        tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                        pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                        avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
                        bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm
                        avx512_vp2intersect flush_l1d debug_swap hv_inuse_wr_allowed
                        srso_user_kernel_no amd_lbr_pmc_freeze
Virtualization:         AMD-V
L1d cache:              1.5 MiB (32 instances)
L1i cache:              1 MiB (32 instances)
L2 cache:               32 MiB (32 instances)
L3 cache:               256 MiB (8 instances)
NUMA node(s):           2
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECrate®2017_int_base = 413

SPECrate®2017_int_peak = 415

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

NUMA node0 CPU(s): 0-15,32-47
NUMA node1 CPU(s): 16-31,48-63
Vulnerability Gather data sampling: Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; IBPB on VMEXIT only
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0-15,32-47
node 0 size: 96444 MB
node 0 free: 95926 MB
node 1 cpus: 16-31,48-63
node 1 size: 96649 MB
node 1 free: 95763 MB
node distances:
node 0 1
0: 10 12
1: 12 10

9. /proc/meminfo

MemTotal: 197727696 kB

10. who -r

run-level 3 Jun 19 03:59

11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECrate®2017_int_base = 413

SPECrate®2017_int_peak = 415

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

enabled-runtime disabled
indirect

lvm2-monitor nsd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore tuned
wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
systemd-remount-fs
NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables
exchange-bmc-os-info firewalld fsidd gnome-remote-desktop gpm grub2-once haveged
hwloc-dump-hwdata ipmi ipmievdev issue-add-ssh-keys kexec-load lunmask man-db-create
multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount ostree-state-overlay@ rpcbind
rpmconfigcheck rsyncd rtkit-daemon samba-bgqd serial-getty@ smartd_generate_opts smb snmpd
snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
update-system-flatpaks upower vncserver@ wpa_supplicant@
pcscd saned@ systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.53.6-default
root=UUID=d0b32dbd-90a4-4b63-ab12-5cda718ac1ef
splash=silent
resume=/dev/disk/by-uuid/d6c60601-2238-4347-950d-7321063e97c9
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info
analyzing CPU 51:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. tuned-adm active
Current active profile: balanced

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECrate®2017_int_base = 413

SPECrate®2017_int_peak = 415

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Platform Notes (Continued)

17. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7

20. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda5 xfs 436G 25G 412G 6% /home

21. /sys/devices/virtual/dmi/id
Vendor: HPE
Product: ProLiant DL145 Gen11
Product Family: ProLiant
Serial: DL145GEN11

22. dmidecode
Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
5x Micron MTC20F2085S1RC64BD2 MWFF 32 GB 2 rank 6400
1x Micron MTC20F2085S1RC64BD2 QSFF 32 GB 2 rank 6400

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: HPE
BIOS Version: 2.10
BIOS Date: 04/02/2026
BIOS Revision: 2.10
Firmware Revision: 1.74

Compiler Version Notes

=====
C | 502.gcc_r(peak)
=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECrate®2017_int_base = 413

SPECrate®2017_int_peak = 415

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Compiler Version Notes (Continued)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```
C      | 502.gcc_r(peak)
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```
C++    | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
      | 541.leela_r(base, peak)
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```
Fortran | 548.exchange2_r(base, peak)
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECrate®2017_int_base = 413

SPECrate®2017_int_peak = 415

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather

-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5

-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto

-fstruct-layout=7 -mllvm -unroll-threshold=50

-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining

-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang

-lamdalloc-ext -ldl

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5

-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100

-mllvm -loop-unswitch-threshold=200000

-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECrate®2017_int_base = 413

SPECrate®2017_int_peak = 415

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fvecLib=AMDLIBM -ffast-math -fltO
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECrate®2017_int_base = 413

SPECrate®2017_int_peak = 415

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: basepeak = yes

525.x264_r: basepeak = yes

557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECrate®2017_int_base = 413

SPECrate®2017_int_peak = 415

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

Peak Optimization Flags (Continued)

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver5 -fveclib=AMDLIBM  
-ffast-math -flto -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-lflang -lamdalloc -ldl
```

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Sorano-rev1.5.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Sorano-rev1.5.xml>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL145 Gen11

(2.70 GHz, AMD EPYC 8325P)

SPECrate®2017_int_base = 413

SPECrate®2017_int_peak = 415

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2026

Hardware Availability: Jun-2026

Software Availability: Jul-2025

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-06-18 18:30:33-0400.

Report generated on 2026-08-11 18:21:46 by CPU2017 PDF formatter v6716.

Originally published on 2026-08-11.