SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380a Gen12
(2.30 GHz, Intel Xeon 6776P)

SPECspeed®2017_int_base = 16.3

SPECspeed®2017_int_peak = 16.5

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2026
Hardware Availability: May-2026
Software Availability: Jul-2025

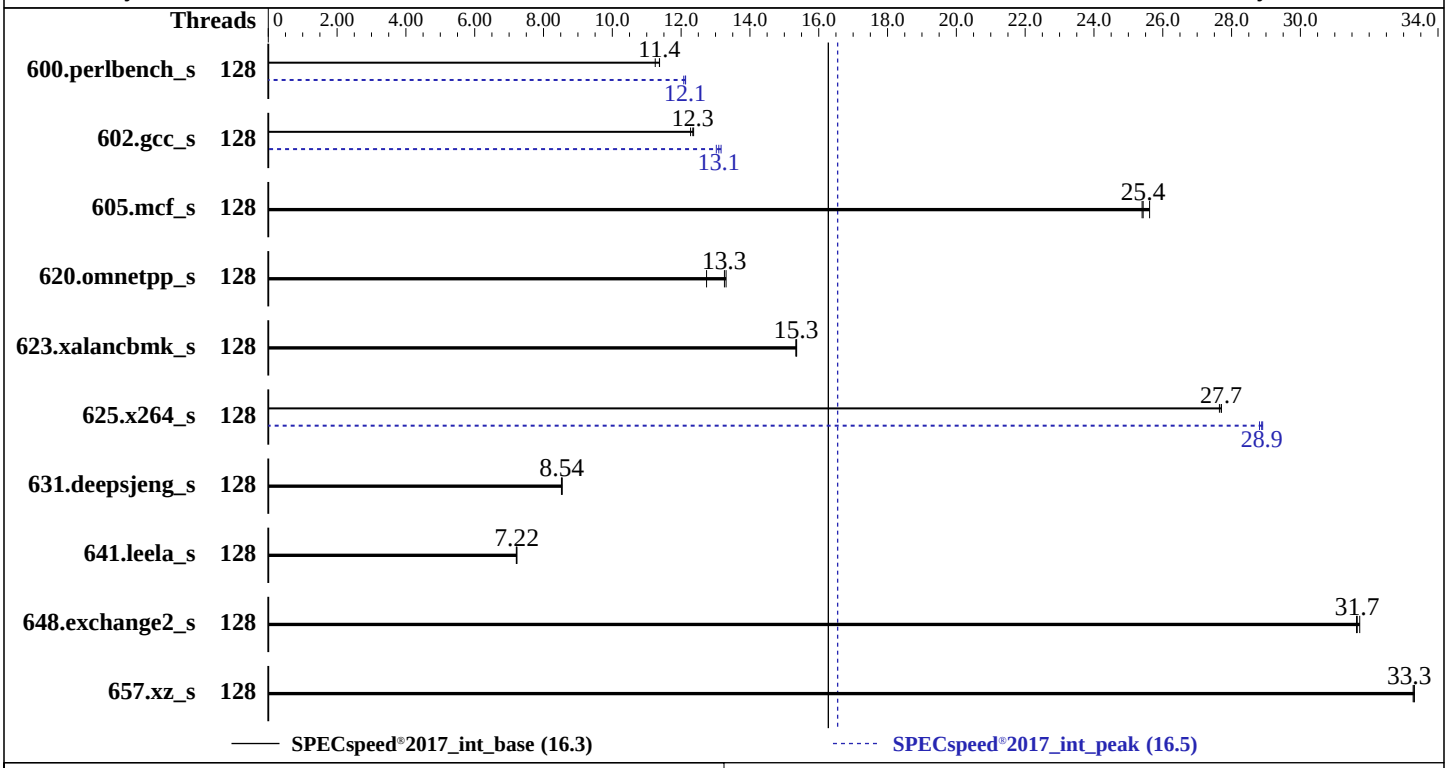

Hardware

CPU Name:	Intel Xeon 6776P
Max MHz:	3900
Nominal:	2300
Enabled:	128 cores, 2 chips
Orderable:	1,2 Chips
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	336 MB I+D on chip per chip
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)
Storage:	1 x 3.2 TB NVMe SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP7 6.4.0-150700.53.6-default
Compiler:	C/C++: Version 2025.2 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2025.2 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	HPE BIOS Version v1.34 04/18/2025 released Apr-2025
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380a Gen12
(2.30 GHz, Intel Xeon 6776P)

SPECspeed®2017_int_base = 16.3

SPECspeed®2017_int_peak = 16.5

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2026
Hardware Availability: May-2026
Software Availability: Jul-2025

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	128	158	11.2	**156**	**11.4**	156	11.4	128	147	12.1	**146**	**12.1**	146	12.1
602.gcc_s	128	**323**	**12.3**	324	12.3	322	12.4	128	306	13.0	303	13.2	**304**	**13.1**
605.mcf_s	128	**186**	**25.4**	186	25.4	184	25.6	128	**186**	**25.4**	186	25.4	184	25.6
620.omnetpp_s	128	123	13.3	**123**	**13.3**	128	12.7	128	123	13.3	**123**	**13.3**	128	12.7
623.xalancbmk_s	128	**92.3**	**15.3**	92.4	15.3	92.3	15.4	128	**92.3**	**15.3**	92.4	15.3	92.3	15.4
625.x264_s	128	63.7	27.7	**63.7**	**27.7**	63.8	27.6	128	**61.1**	**28.9**	61.0	28.9	61.2	28.8
631.deepsjeng_s	128	168	8.52	**168**	**8.54**	168	8.54	128	168	8.52	**168**	**8.54**	168	8.54
641.leela_s	128	236	7.22	**236**	**7.22**	237	7.21	128	236	7.22	**236**	**7.22**	237	7.21
648.exchange2_s	128	92.9	31.6	92.7	31.7	**92.9**	**31.7**	128	92.9	31.6	92.7	31.7	**92.9**	**31.7**
657.xz_s	128	**186**	**33.3**	186	33.3	186	33.3	128	**186**	**33.3**	186	33.3	186	33.3

SPECspeed®2017_int_base = 16.3

SPECspeed®2017_int_peak = 16.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
tuned-adm profile was turned off using "tuned-adm off"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Redhat Enterprise Linux 8.0
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configuration: Parameters are selected in the order shown below
Workload Profile set to General Peak Frequency Compute
Intel Hyper-Threading set to Disabled
Thermal Configuration set to Maximum Cooling
Last Level Cache (LLC) Prefetch set to Enabled
Sub-NUMA Clustering (SNC) set to Enabled

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Thu Jul 23 22:23:44 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux localhost 6.4.0-150700.53.6-default #1 SMP PREEMPT_DYNAMIC Tue Jul  1 14:54:47 UTC 2025 (8ab7501)
   x86_64 x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    22:23:44 up  7:06,  4 users,  load average: 0.00, 0.00, 0.00
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   root     pts/0    172.16.0.100     22:20   32.00s  0.68s  0.00s -bash

 ------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

 ------------------------------------------------------------
 4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
   scheduling priority             (-e) 0
   file size               (blocks, -f) unlimited
   pending signals                 (-i) 2062678
   max locked memory       (kbytes, -l) 8192
   max memory size         (kbytes, -m) unlimited
   open files                      (-n) 1024
   pipe size            (512 bytes, -p) 8
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 2062678
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@pts/0
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2025.2-linux64-graniterapids-speed-20250605.cfg --iterations=3 --reportable --define cores=128 --tune
   base,peak -o all --define intspeedaffinity --define drop_caches intspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2025.2-linux64-graniterapids-speed-20250605.cfg --iterations 3 --reportable --define cores=128 --tune
   base,peak --output_format all --define intspeedaffinity --define drop_caches --nopower --runmode speed
   --tune base:peak --size refspeed intspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6776P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x10003a5
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
    cpu cores       : 64
    siblings        : 64
    2 physical ids (chips)
    128 processors (hardware threads)
    physical id 0: core ids 0-31,64-95
    physical id 1: core ids 0-31,64-95
    physical id 0: apicids
    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,128,130,132,13
    4,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,184,186
    ,188,190
    physical id 1: apicids
    256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
    08,310,312,314,316,318,384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,42
    4,426,428,430,432,434,436,438,440,442,444,446
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.40.4:
  Architecture:                            x86_64
  CPU op-mode(s):                          32-bit, 64-bit
  Address sizes:                           46 bits physical, 57 bits virtual
  Byte Order:                              Little Endian
  CPU(s):                                  128
  On-line CPU(s) list:                     0-127
  Vendor ID:                               GenuineIntel
  Model name:                              Intel(R) Xeon(R) 6776P
  CPU family:                              6
  Model:                                   173
  Thread(s) per core:                      1
  Core(s) per socket:                      64
  Socket(s):                               2
  Stepping:                                1
  BogoMIPS:                                4600.00
  Flags:                                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                           pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                           pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                           nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                           pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma
                                           cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                           tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                           3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin
                                           cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                           flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep
                                           bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                           avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
                                           avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                                           cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni
                                           avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi vnmi avx512vbmi
                                           umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                           avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                           bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                           serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
                                           amx_tile amx_int8 flush_l1d arch_capabilities
  Virtualization:                          VT-x
  L1d cache:                               6 MiB (128 instances)
  L1i cache:                               8 MiB (128 instances)
  L2 cache:                                256 MiB (128 instances)
  L3 cache:                                672 MiB (2 instances)
  NUMA node(s):                            4
  NUMA node0 CPU(s):                       0-31
  NUMA node1 CPU(s):                       32-63
  NUMA node2 CPU(s):                       64-95
  NUMA node3 CPU(s):                       96-127
  Vulnerability Gather data sampling:      Not affected
  Vulnerability Indirect target selection: Not affected
  Vulnerability Itlb multihit:             Not affected
  Vulnerability L1tf:                      Not affected
  Vulnerability Mds:                       Not affected
  Vulnerability Meltdown:                  Not affected
  Vulnerability Mmio stale data:           Not affected
  Vulnerability Reg file data sampling:    Not affected
  Vulnerability Retbleed:                  Not affected
  Vulnerability Spec rstack overflow:      Not affected
  Vulnerability Spec store bypass:         Mitigation; Speculative Store Bypass disabled via prctl
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Spectre v1:                Mitigation; usercopy/swapgs barriers and __user pointer
                                           sanitization
  Vulnerability Spectre v2:                Mitigation; Enhanced / Automatic IBRS; IBPB conditional;
                                           PBRSB-eIBRS Not affected; BHI BHI_DIS_S
  Vulnerability Srbds:                     Not affected
  Vulnerability Tsx async abort:           Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       6M   12 Data            1     64        1             64
     L1i       64K       8M   16 Instruction     1     64        1             64
     L2         2M     256M   16 Unified         2   2048        1             64
     L3       336M     672M   16 Unified         3 344064        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-31
  node 0 size: 128736 MB
  node 0 free: 127321 MB
  node 1 cpus: 32-63
  node 1 size: 129015 MB
  node 1 free: 128684 MB
  node 2 cpus: 64-95
  node 2 size: 129015 MB
  node 2 free: 123558 MB
  node 3 cpus: 96-127
  node 3 size: 128935 MB
  node 3 free: 128473 MB
  node distances:
  node   0   1   2   3
    0:  10  12  21  21
    1:  12  10  21  21
    2:  21  21  10  12
    3:  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       528079536 kB

------------------------------------------------------------
10. who -r
  run-level 3 Jul 23 15:20

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
                   bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog
                   lvm2-monitor nscd nvmefc-boot-connections nvmf-autoconnect postfix purge-kernels rollback
                   rsyslog smartd sshd systemd-pstore tuned wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
                   wickedd-nanny wpa_supplicant
  enabled-runtime  systemd-remount-fs
  disabled         NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
```

(Continued on next page)

Platform Notes (Continued)

```
                    autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
                    chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebtables
                    exchange-bmc-os-info firewalld fsidd gnome-remote-desktop gpm grub2-once haveged
                    hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create
                    multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount ostree-state-overlay@ rpcbind
                    rpmconfigcheck rsyncd rtkit-daemon samba-bgqd serial-getty@ smartd_generate_opts smb snmpd
                    snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-confext
                    systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
                    update-system-flatpaks upower vncserver@ wpa_supplicant@
  indirect          pcscd saned@ systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.53.6-default
  root=UUID=53eaf074-52c9-4c95-ac90-14016a956b9f
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 111:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  No current active profile.

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP7

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2017
  Filesystem     Type   Size  Used Avail Use% Mounted on
  /dev/nvme0n1p2 btrfs  3.0T  241G  2.7T   9% /home

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        HPE ProLiant Compute DL380a Gen12
    Product Family: ProLiant
    Serial:         7CED18P0RE

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    15x Hynix HMCG88AHBRA471N 32 GB 2 rank 6400
    1x Hynix HMCG88AHBRA472N 32 GB 2 rank 6400


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       HPE
   BIOS Version:      1.34
   BIOS Date:         04/18/2025
   BIOS Revision:     1.34
   Firmware Revision: 1.19
```

Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
        | 657.xz_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================================================
C++      | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
         | 641.leela_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 648.exchange2_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fdelayed-template-parsing -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-fno-strict-aliasing -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)

Peak Optimization Flags (Continued)

600.perlbench_s (continued):
-ljemalloc

602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

605.mcf_s: basepeak = yes

625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.html
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.8.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.xml
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.8.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-07-23 12:53:44-0400.
Report generated on 2026-08-11 18:21:46 by CPU2017 PS formatter v6716.
Originally published on 2026-08-11.