SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge XE9785 (AMD EPYC 9965 192-Core Processor)

SPECspeed®2017_fp_base = 519

SPECspeed®2017_fp_peak = 553

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jul-2026
Hardware Availability: Mar-2026
Software Availability: Jul-2026

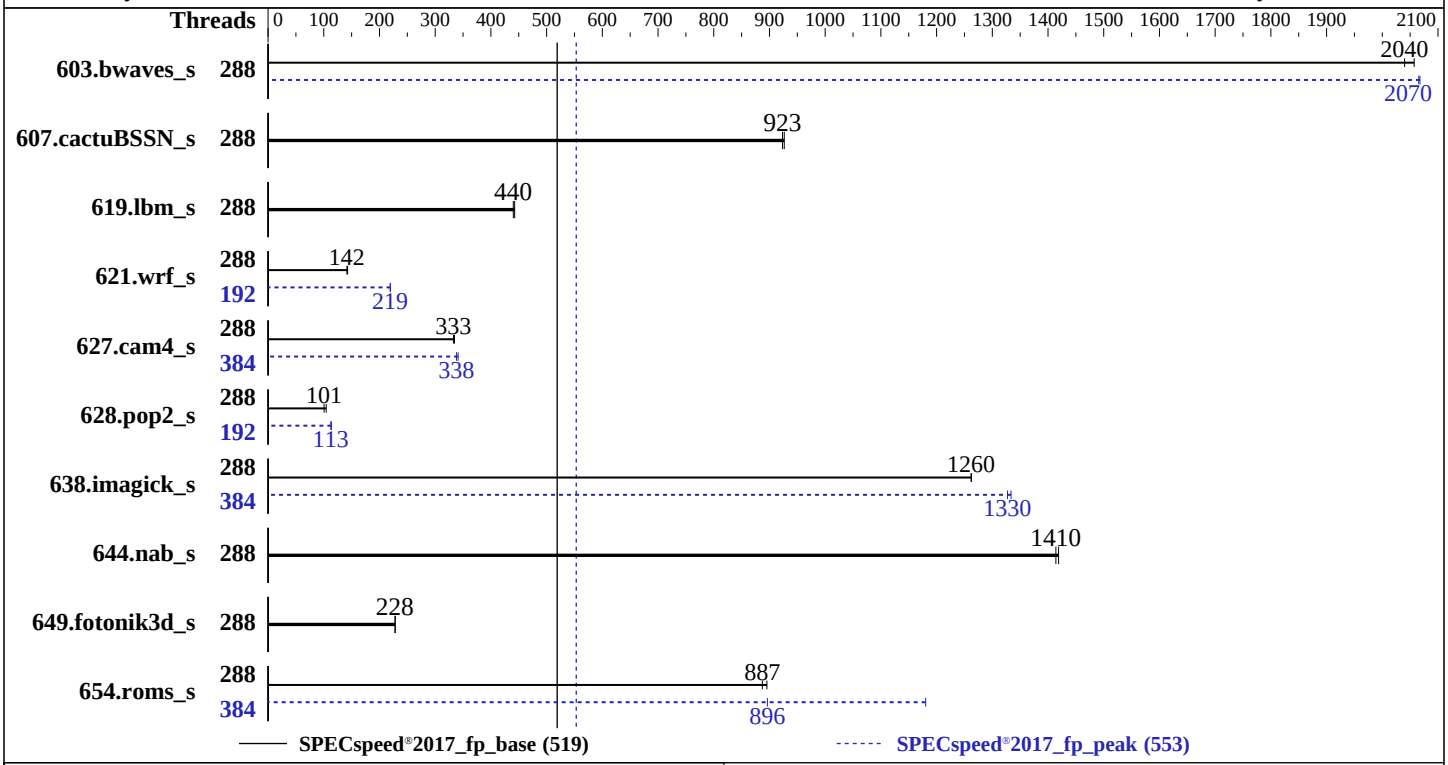

Hardware

CPU Name:	AMD EPYC 9965
Max MHz:	3700
Nominal:	2250
Enabled:	384 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 16 cores
Other:	None
Memory:	2304 GB (24 x 96 GB 2Rx4 PC5-6400B-R)
Storage:	340 GB on tmpfs
Other:	CPU Cooling: Air

Software

OS:	Ubuntu 24.04.3 LTS 6.8.0-134-generic
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	Yes
Firmware:	Version 1.2.4 released Feb-2026
File System:	tmpfs
System State:	Run level 5 (graphical multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	288	28.7	2060	**28.9**	**2040**			288	**28.6**	**2070**	28.5	2070		
607.cactuBSSN_s	288	18.0	927	**18.1**	**923**			288	18.0	927	**18.1**	**923**		
619.lbm_s	288	**11.9**	**440**	11.8	443			288	**11.9**	**440**	11.8	443		
621.wrf_s	288	92.6	143	**93.4**	**142**			192	**60.4**	**219**	60.2	220		
627.cam4_s	288	26.5	335	**26.6**	**333**			384	26.0	341	**26.2**	**338**		
628.pop2_s	288	**118**	**101**	114	104			192	104	114	**105**	**113**		
638.imagick_s	288	**11.4**	**1260**	11.4	1260			384	**10.9**	**1330**	10.8	1330		
644.nab_s	288	12.3	1420	**12.4**	**1410**			288	12.3	1420	**12.4**	**1410**		
649.fotonik3d_s	288	**40.0**	**228**	39.9	228			288	**40.0**	**228**	39.9	228		
654.roms_s	288	17.6	895	**17.7**	**887**			384	**17.6**	**896**	13.3	1180		

SPECspeed®2017_fp_base = 519

SPECspeed®2017_fp_peak = 553

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-767"
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4/amd_speed_aocc500_znver5_A_lib/lib:/mnt/ramdisk/cpu201
     7-1.1.9-aocc500-znerv5_A1.4/amd_speed_aocc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "768"

Environment variables set by runcpu during the 603.bwaves_s peak run:
GOMP_CPU_AFFINITY =
     "0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187,192-203,208-219,224
     -235,240-251,256-267,272-283,288-299,304-315,320-331,336-347,352-363,368-379"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY =
     "0,384,1,385,2,386,3,387,4,388,5,389,6,390,7,391,8,392,9,393,10,394,11,395,12,396,13,397,14,398,15,399
     ,16,400,17,401,18,402,19,403,20,404,21,405,22,406,23,407,24,408,25,409,26,410,27,411,28,412,29,413,30,
     414,31,415,32,416,33,417,34,418,35,419,36,420,37,421,38,422,39,423,40,424,41,425,42,426,43,427,44,428,
     45,429,46,430,47,431,48,432,49,433,50,434,51,435,52,436,53,437,54,438,55,439,56,440,57,441,58,442,59,4
     43,60,444,61,445,62,446,63,447,64,448,65,449,66,450,67,451,68,452,69,453,70,454,71,455,72,456,73,457,7
     4,458,75,459,76,460,77,461,78,462,79,463,80,464,81,465,82,466,83,467,84,468,85,469,86,470,87,471,88,47
     2,89,473,90,474,91,475,92,476,93,477,94,478,95,479"

Environment variables set by runcpu during the 627.cam4_s peak run:
GOMP_CPU_AFFINITY = "0-383"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-191"

Environment variables set by runcpu during the 638.imagick_s peak run:
GOMP_CPU_AFFINITY = "0-383"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0-383"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04
```

Platform Notes

```
  BIOS Settings:
             Virtualization Technology : Disabled
              NUMA Nodes Per Socket : 1

                        System Profile : Custom
                             C-States : Disabled
                   Memory Patrol Scrub : Disabled
      PCI ASPM L1 Link Power Management : Disabled
        Periodic Directory Rinse Tuning : Blended
                   Determinism Control : Manual
                    Determinism Slider : Power Determinism
                        Optimizer Mode : Enabled
```

(Continued on next page)

Platform Notes (Continued)

```
    Algorithm Performance Boost Disable : Enabled
                ApbDis Fixed DF P-State : P0
                    Adaptive Allocation : Enabled
                     Dram Refresh Delay : Performance
                    DIMM Self Healing -
          on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on J8NZK54-XE9785 Thu Jul 16 21:04:32 2026

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.16)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux J8NZK54-XE9785 6.8.0-134-generic #134-Ubuntu SMP PREEMPT_DYNAMIC Fri Jun 26 18:43:11 UTC 2026 x86_64
  x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   21:04:32 up  2:38,  1 user,  load average: 6.59, 6.89, 3.98
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU  WHAT
  root     tty1     -                18:58    2:05m  2.23s  0.86s /bin/bash ./amd_speed_aocc500_znver5_A1.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
   stack(kbytes)        unlimited
   coredump(blocks)     0
   memory(kbytes)       unlimited
   locked memory(kbytes) 2097152
   process              9284028
   nofiles              1024
   vmemory(kbytes)      unlimited
   locks                unlimited
   rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 /bin/login -p --
 -bash
 /bin/bash /home/DellFiles/bin/DELL_speed.sh
 /bin/bash /home/DellFiles/bin/cpu-run-main.sh speed
 /bin/bash /home/DellFiles/bin/cpu-run-main.sh speed
 /bin/bash /home/DellFiles/bin/AMD/cpu-run-speccpu.sh speed_all --define DL-VERS=7.0_T09 --output_format
   html,pdf,txt
 python3 ./run_amd_speed_aocc500_znver5_A1.py
 /bin/bash ./amd_speed_aocc500_znver5_A1.sh
 runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 DL-VERS=7.0_T09
   --output_format html,pdf,txt fpspeed
 runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --output_format
   html,pdf,txt --nopower --runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv
   --note-preenv --logfile $SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0
   --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9965 192-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 17
    stepping        : 0
    microcode       : 0xb101058
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 192 4K pages
    cpu cores       : 192
    siblings        : 384
    2 physical ids (chips)
    768 processors (hardware threads)
    physical id 0: core ids 0-191
    physical id 1: core ids 0-191
    physical id 0: apicids 0-383
    physical id 1: apicids 512-895
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
```

(Continued on next page)

Platform Notes (Continued)

```
CPU(s):                                768
On-line CPU(s) list:                   0-767
Vendor ID:                             AuthenticAMD
BIOS Vendor ID:                        AMD
Model name:                            AMD EPYC 9965 192-Core Processor
BIOS Model name:                       AMD EPYC 9965 192-Core Processor                 CPU @ 2.2GHz
BIOS CPU family:                       107
CPU family:                            26
Model:                                 17
Thread(s) per core:                    2
Core(s) per socket:                    192
Socket(s):                             2
Stepping:                              0
Frequency boost:                       enabled
CPU(s) scaling MHz:                    42%
CPU max MHz:                           3700.1951
CPU min MHz:                           1500.0000
BogoMIPS:                              4493.99
Flags:                                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                       pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
                                       pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl
                                       nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq
                                       monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes
                                       xsave avx f16c rdrand lahf_lm cmp_legacy extapic cr8_legacy abm
                                       sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                                       perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                                       hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced
                                       vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                                       rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                                       avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
                                       cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk
                                       avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
                                       amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock nrip_save
                                       tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                                       pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                                       avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                       avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
                                       bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm
                                       avx512_vp2intersect flush_l1d debug_swap srso_user_kernel_no
L1d cache:                             18 MiB (384 instances)
L1i cache:                             12 MiB (384 instances)
L2 cache:                              384 MiB (384 instances)
L3 cache:                              768 MiB (24 instances)
NUMA node(s):                          2
NUMA node0 CPU(s):                     0-191,384-575
NUMA node1 CPU(s):                     192-383,576-767
Vulnerability Gather data sampling:    Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit:           Not affected
Vulnerability L1tf:                    Not affected
Vulnerability Mds:                     Not affected
Vulnerability Meltdown:                Not affected
Vulnerability Mmio stale data:         Not affected
Vulnerability Reg file data sampling:  Not affected
Vulnerability Retbleed:                Not affected
Vulnerability Spec rstack overflow:    Not affected
Vulnerability Spec store bypass:       Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:              Mitigation; usercopy/swapgs barriers and __user pointer
                                       sanitization
Vulnerability Spectre v2:              Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
```

(Continued on next page)

Platform Notes (Continued)

```
                                       always-on; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                 Not affected
  Vulnerability Tsa:                   Not affected
  Vulnerability Tsx async abort:       Not affected
  Vulnerability Vmscape:               Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K      18M   12 Data            1    64        1             64
     L1i       32K      12M    8 Instruction     1    64        1             64
     L2         1M     384M   16 Unified         2  1024        1             64
     L3        32M     768M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0-191,384-575
  node 0 size: 1160082 MB
  node 0 free: 1152651 MB
  node 1 cpus: 192-383,576-767
  node 1 size: 1161006 MB
  node 1 free: 1156405 MB
  node distances:
  node   0   1
    0:  10  32
    1:  32  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       2376795076 kB

------------------------------------------------------------
10. who -r
  run-level 5 Jul 16 18:26

------------------------------------------------------------
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.16)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init
                   cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                   grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd
                   networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
                   snapd ssh sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore
                   systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw
                   unattended-upgrades vgauth
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         console-getty debug-shell iscsid nftables rsync serial-getty@
                   systemd-boot-check-no-failures systemd-confext systemd-network-generator
                   systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
                   systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
                   systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
                   systemd-time-wait-sync upower
  indirect         systemd-sysupdate systemd-sysupdate-reboot uuidd
  masked           cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.8.0-134-generic
  root=UUID=73863172-b75e-41c3-86f9-7d003c2eee69
  ro

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 450:
    current policy: frequency should be within 1.50 GHz and 2.25 GHz.
                    The governor "schedutil" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  2250MHz

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 18. OS release
   From /etc/*-release /etc/*-version
   os-release Ubuntu 24.04.3 LTS

 ------------------------------------------------------------
 19. Disk information
 SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4
   Filesystem     Type   Size  Used Avail Use% Mounted on
   tmpfs          tmpfs  340G  3.3G  337G   1% /mnt/ramdisk

 ------------------------------------------------------------
 20. /sys/devices/virtual/dmi/id
     Vendor:         Dell Inc.
     Product:        PowerEdge XE9785
     Product Family: PowerEdge
     Serial:         J8NZK54

 ------------------------------------------------------------
 21. dmidecode
   Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     22x 80AD000080AD HMCGM4MHBRB504N 96 GB 2 rank 6400
     2x 80AD000080AD HMCGM4MHBRB505N 96 GB 2 rank 6400


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Dell Inc.
    BIOS Version:      1.2.4
    BIOS Date:         02/12/2026
    BIOS Revision:     1.2
```

Compiler Version Notes

```
==============================================================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

628.pop2_s: `-DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64`
638.imagick_s: `-DSPEC_LP64`
644.nab_s: `-DSPEC_LP64`
649.fotonik3d_s: `-DSPEC_LP64`
654.roms_s: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both Fortran and C:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:
```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
```

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):
`-mllvm -unroll-threshold=50 -zopt`
`-mllvm -loop-unswitch-threshold=200000 -mllvm -unroll-threshold=100`
`-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none`
`-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

Base Other Flags

C benchmarks:
`-Wno-return-type -Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-return-type -Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-return-type -Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:
`clang`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

619.lbm_s: `basepeak = yes`

638.imagick_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining -fstruct-layout=9 -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

644.nab_s: `basepeak = yes`

Fortran benchmarks:

603.bwaves_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -fscalar-transform -fvector-transform -mllvm -reduce-array-computations=3 -Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

649.fotonik3d_s: `basepeak = yes`

654.roms_s: `Same as 603.bwaves_s`

Benchmarks using both Fortran and C:

621.wrf_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining -fstruct-layout=9 -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt -funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

627.cam4_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp`

(Continued on next page)

Peak Optimization Flags (Continued)

627.cam4_s (continued):
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -Mrecursive
-mrecip=none -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fscalar-transform
-fvector-transform -Mrecursive -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

Peak Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc500-flags.html
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/aocc500-flags.xml
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-07-16 17:04:32-0400.
Report generated on 2026-08-11 18:22:18 by CPU2017 PS formatter v6716.
Originally published on 2026-08-11.