SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

GPU SuperServer AS -5126GS-TNRT2
(H14DSG-Q-CPU , AMD EPYC 9555)

SPECrate®2017_fp_base = 1670

SPECrate®2017_fp_peak = 1800

CPU2017 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jul-2026
Hardware Availability: Oct-2024
Software Availability: Jun-2026

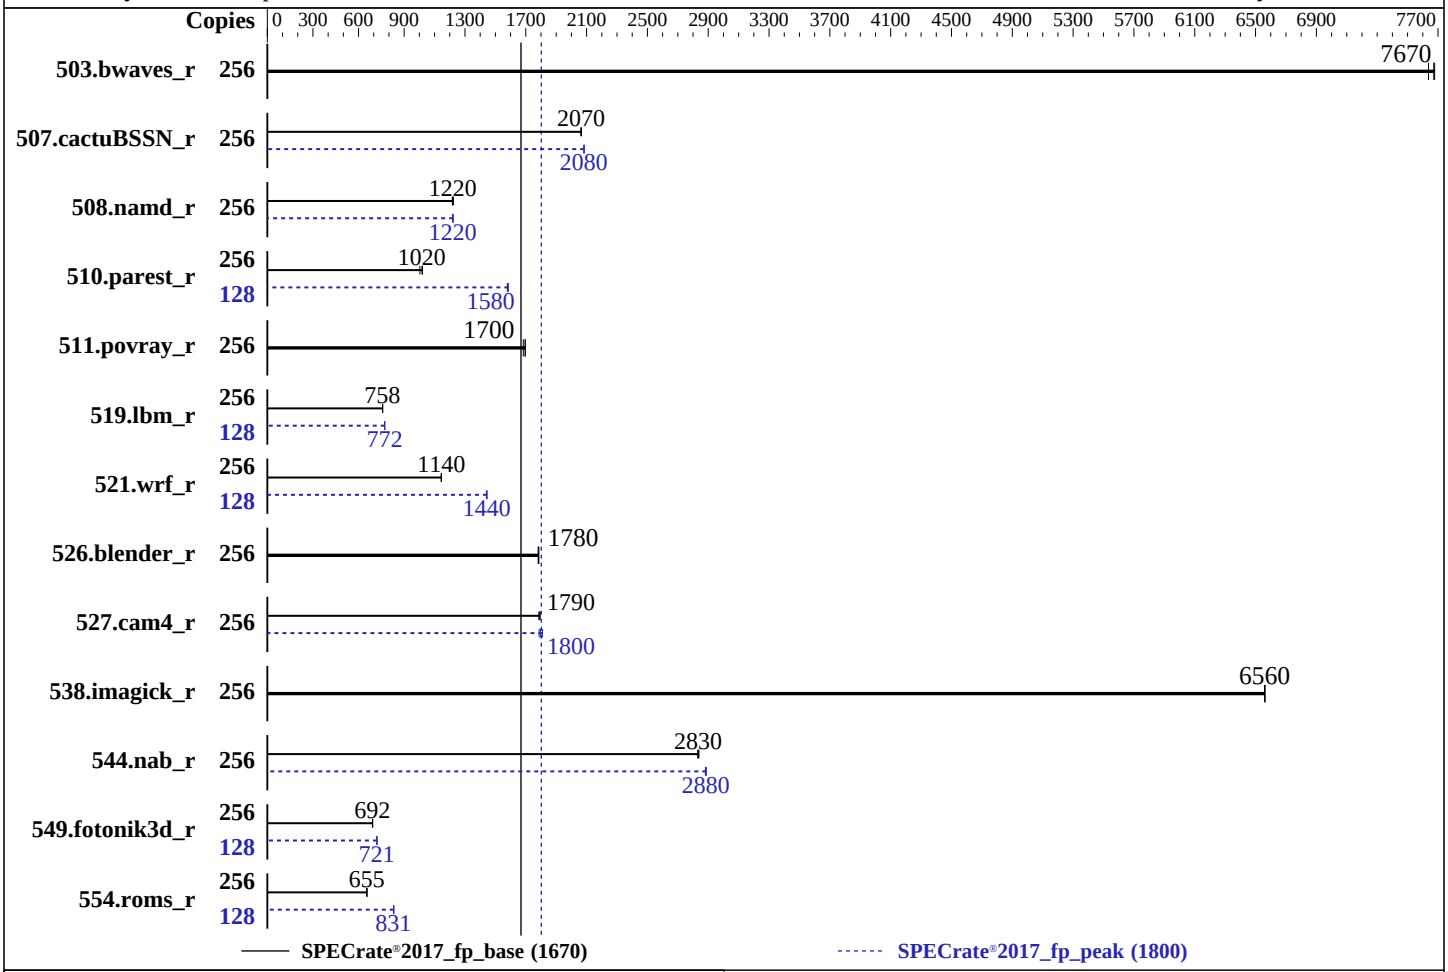

Hardware

CPU Name:	AMD EPYC 9555
Max MHz:	4400
Nominal:	3200
Enabled:	128 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	256 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	2304 GB (24 x 96 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 240 GB SATA SSD
Other:	CPU Cooling: Air

Software

OS:	Ubuntu 24.04.4 LTS Kernel 6.8.0-134-generic
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	No
Firmware:	Version 2.0 released Apr-2026
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

GPU SuperServer AS -5126GS-TNRT2
(H14DSG-Q-CPU , AMD EPYC 9555)

SPECrate®2017_fp_base = 1670

SPECrate®2017_fp_peak = 1800

CPU2017 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jul-2026
Hardware Availability: Oct-2024
Software Availability: Jun-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	336	7640	**335**	**7670**	334	7680	256	336	7640	**335**	**7670**	334	7680
507.cactuBSSN_r	256	157	2060	**157**	**2070**	157	2070	256	156	2080	**156**	**2080**	156	2080
508.namd_r	256	200	1220	**199**	**1220**	199	1220	256	**199**	**1220**	199	1220	199	1220
510.parest_r	256	**659**	**1020**	656	1020	668	1000	128	212	1580	**212**	**1580**	211	1590
511.povray_r	256	352	1700	**353**	**1700**	355	1680	256	352	1700	**353**	**1700**	355	1680
519.lbm_r	256	356	758	**356**	**758**	356	758	128	**175**	**772**	175	772	175	771
521.wrf_r	256	**501**	**1140**	501	1150	501	1140	128	**199**	**1440**	199	1440	198	1440
526.blender_r	256	**219**	**1780**	219	1780	218	1790	256	**219**	**1780**	219	1780	218	1790
527.cam4_r	256	251	1790	249	1790	**250**	**1790**	256	250	1790	247	1810	**249**	**1800**
538.imagick_r	256	97.1	6560	97.0	6560	**97.1**	**6560**	256	97.1	6560	97.0	6560	**97.1**	**6560**
544.nab_r	256	152	2840	**152**	**2830**	152	2830	256	**149**	**2880**	149	2890	150	2880
549.fotonik3d_r	256	**1441**	**692**	1440	693	1443	691	128	692	721	692	721	**692**	**721**
554.roms_r	256	620	656	**622**	**655**	622	654	128	245	832	**245**	**831**	245	831

SPECrate®2017_fp_base = 1670

SPECrate®2017_fp_peak = 1800

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
```

(Continued on next page)

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS settings:
NUMA Nodes Per Socket = NPS4
Determinism Control = Manual
Determinism Enable = Power
TDP control = Manual
TDP = 400
Package Power Limit Control = Manual
Package Power Limit = 400
TSME = Disabled

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on smc Wed Jul 15 07:02:02 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.16)
```

(Continued on next page)

Platform Notes (Continued)

```
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux smc 6.8.0-134-generic #134-Ubuntu SMP PREEMPT_DYNAMIC Fri Jun 26 18:43:11 UTC 2026 x86_64 x86_64
  x86_64 GNU/Linux

------------------------------------------------------------
2. w
   07:02:02 up  4:50,  1 user,  load average: 141.21, 225.34, 242.77
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU  WHAT
  smc      tty1     -                02:11    4:39m  0.45s  0.43s sudo su -

------------------------------------------------------------
3. Username
  From environment variable $USER:  root
  From the command 'logname':       smc

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              9286875
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 /bin/login -p --
 -bash
 sudo su -
 sudo su -
 su -
 -bash
 python3 ./run_amd_rate_aocc500_znver5_A1.py
 /bin/bash ./amd_rate_aocc500_znver5_A1.sh
 runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
 runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
```

(Continued on next page)

Platform Notes (Continued)

```
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9555 64-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 2
    stepping        : 1
    microcode       : 0xb002162
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 192 4K pages
    cpu cores       : 64
    siblings        : 128
    2 physical ids (chips)
    256 processors (hardware threads)
    physical id 0: core ids 0-63
    physical id 1: core ids 0-63
    physical id 0: apicids 0-127
    physical id 1: apicids 128-255
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               256
  On-line CPU(s) list:                  0-255
  Vendor ID:                            AuthenticAMD
  BIOS Vendor ID:                       Advanced Micro Devices, Inc.
  Model name:                           AMD EPYC 9555 64-Core Processor
  BIOS Model name:                      AMD EPYC 9555 64-Core Processor                Unknown CPU @
                                        3.2GHz
  BIOS CPU family:                      107
  CPU family:                           26
  Model:                                2
  Thread(s) per core:                   2
  Core(s) per socket:                   64
  Socket(s):                            2
  Stepping:                             1
  Frequency boost:                      enabled
  CPU(s) scaling MHz:                   73%
  CPU max MHz:                          4409.3750
  CPU min MHz:                          1500.0000
  BogoMIPS:                             6399.74
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
                                        pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl
                                        nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq
                                        monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes
                                        xsave avx f16c rdrand lahf_lm cmp_legacy extapic cr8_legacy abm
                                        sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                                        perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                                        hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced
```

(Continued on next page)

Platform Notes (Continued)

```
                                vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                                rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                                avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
                                cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk
                                avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
                                amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock nrip_save
                                tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                                pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                                avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
                                bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm
                                avx512_vp2intersect flush_l1d debug_swap srso_user_kernel_no
  L1d cache:                    6 MiB (128 instances)
  L1i cache:                    4 MiB (128 instances)
  L2 cache:                     128 MiB (128 instances)
  L3 cache:                     512 MiB (16 instances)
  NUMA node(s):                 8
  NUMA node0 CPU(s):            0-15,128-143
  NUMA node1 CPU(s):            16-31,144-159
  NUMA node2 CPU(s):            32-47,160-175
  NUMA node3 CPU(s):            48-63,176-191
  NUMA node4 CPU(s):            64-79,192-207
  NUMA node5 CPU(s):            80-95,208-223
  NUMA node6 CPU(s):            96-111,224-239
  NUMA node7 CPU(s):            112-127,240-255
  Vulnerability Gather data sampling:      Not affected
  Vulnerability Indirect target selection: Not affected
  Vulnerability Itlb multihit:             Not affected
  Vulnerability L1tf:                      Not affected
  Vulnerability Mds:                       Not affected
  Vulnerability Meltdown:                  Not affected
  Vulnerability Mmio stale data:           Not affected
  Vulnerability Reg file data sampling:    Not affected
  Vulnerability Retbleed:                  Not affected
  Vulnerability Spec rstack overflow:      Not affected
  Vulnerability Spec store bypass:         Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:                Mitigation; usercopy/swapgs barriers and __user pointer
                                           sanitization
  Vulnerability Spectre v2:                Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                           always-on; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                     Not affected
  Vulnerability Tsa:                       Not affected
  Vulnerability Tsx async abort:           Not affected
  Vulnerability Vmscape:                   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       6M   12 Data            1    64        1             64
     L1i       32K       4M    8 Instruction     1    64        1             64
     L2         1M     128M   16 Unified         2  1024        1             64
     L3        32M     512M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-15,128-143
  node 0 size: 289865 MB
  node 0 free: 287855 MB
  node 1 cpus: 16-31,144-159
```

(Continued on next page)

Platform Notes (Continued)

```
  node 1 size: 290292 MB
  node 1 free: 288672 MB
  node 2 cpus: 32-47,160-175
  node 2 size: 290292 MB
  node 2 free: 288726 MB
  node 3 cpus: 48-63,176-191
  node 3 size: 290249 MB
  node 3 free: 288585 MB
  node 4 cpus: 64-79,192-207
  node 4 size: 290292 MB
  node 4 free: 288577 MB
  node 5 cpus: 80-95,208-223
  node 5 size: 290292 MB
  node 5 free: 288655 MB
  node 6 cpus: 96-111,224-239
  node 6 size: 290292 MB
  node 6 free: 288409 MB
  node 7 cpus: 112-127,240-255
  node 7 size: 290221 MB
  node 7 free: 288603 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  32  32  32  32
    1:  12  10  12  12  32  32  32  32
    2:  12  12  10  12  32  32  32  32
    3:  12  12  12  10  32  32  32  32
    4:  32  32  32  32  10  12  12  12
    5:  32  32  32  32  12  10  12  12
    6:  32  32  32  32  12  12  10  12
    7:  32  32  32  32  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       2377523852 kB

------------------------------------------------------------
10. who -r
  run-level 3 Jul 15 02:11

------------------------------------------------------------
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.16)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init
                   cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                   grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd
                   networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
                   snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore
                   systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2
                   ufw unattended-upgrades vgauth
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
                   systemd-boot-check-no-failures systemd-confext systemd-network-generator
                   systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
                   systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
                   systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
```

(Continued on next page)

Platform Notes (Continued)

```
                  systemd-time-wait-sync upower
  indirect        systemd-sysupdate systemd-sysupdate-reboot uuidd
  masked          cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/vmlinuz-6.8.0-134-generic
  root=/dev/mapper/ubuntu--vg-ubuntu--lv
  ro

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 83:
    current policy: frequency should be within 1.50 GHz and 3.20 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  3200MHz

------------------------------------------------------------
15. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
```

(Continued on next page)

Platform Notes (Continued)

```
   max_ptes_none             511
   max_ptes_shared           256
   max_ptes_swap              64
   pages_to_scan            4096
   scan_sleep_millisecs    10000

 ------------------------------------------------------------
 19. OS release
   From /etc/*-release /etc/*-version
   os-release Ubuntu 24.04.4 LTS

 ------------------------------------------------------------
 20. Disk information
 SPEC is set to: /home/cpu2017
   Filesystem                     Type  Size  Used Avail Use% Mounted on
   /dev/mapper/ubuntu--vg-ubuntu--lv ext4  217G   16G  191G   8% /

 ------------------------------------------------------------
 21. /sys/devices/virtual/dmi/id
     Vendor:          Supermicro
     Product:         Super Server
     Product Family: Family
     Serial:          0123456789

 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     24x Samsung M321RYGA0PB2-CCPKC 96 GB 2 rank 6400


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      2.0
    BIOS Date:         04/01/2026
    BIOS Revision:     5.35
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)

Compiler Version Notes (Continued)

```
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

C++ benchmarks:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl

Benchmarks using both Fortran and C:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Benchmarks using both C and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl

Benchmarks using Fortran, C, and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument

Benchmarks using both C and C++:
-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

(Continued on next page)

Peak Compiler Invocation (Continued)

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

538.imagick_r: basepeak = yes

544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

(Continued on next page)

Peak Optimization Flags (Continued)

C++ benchmarks:

508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

510.parest_r: -m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang

554.roms_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -ldl -lflang

Benchmarks using both Fortran and C:

521.wrf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop

(Continued on next page)

Peak Optimization Flags (Continued)

521.wrf_r (continued):
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-faggressive-loop-transform -fvector-transform -fscalar-transform
-Mrecursive -fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

Peak Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

(Continued on next page)

Peak Other Flags (Continued)

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html`
`http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Turin-revH.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml`
`http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Turin-revH.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-07-15 10:02:01-0400.
Report generated on 2026-08-11 18:23:14 by CPU2017 PS formatter v6716.
Originally published on 2026-08-11.