



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

Mainstream SuperServer SYS-221P-C9R  
(X13DEI , Intel Xeon Gold 6548Y+)

SPECrate®2017\_fp\_base = 773

SPECrate®2017\_fp\_peak = 803

CPU2017 License: 6569


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jul-2026

Hardware Availability: Dec-2023

Software Availability: Apr-2026

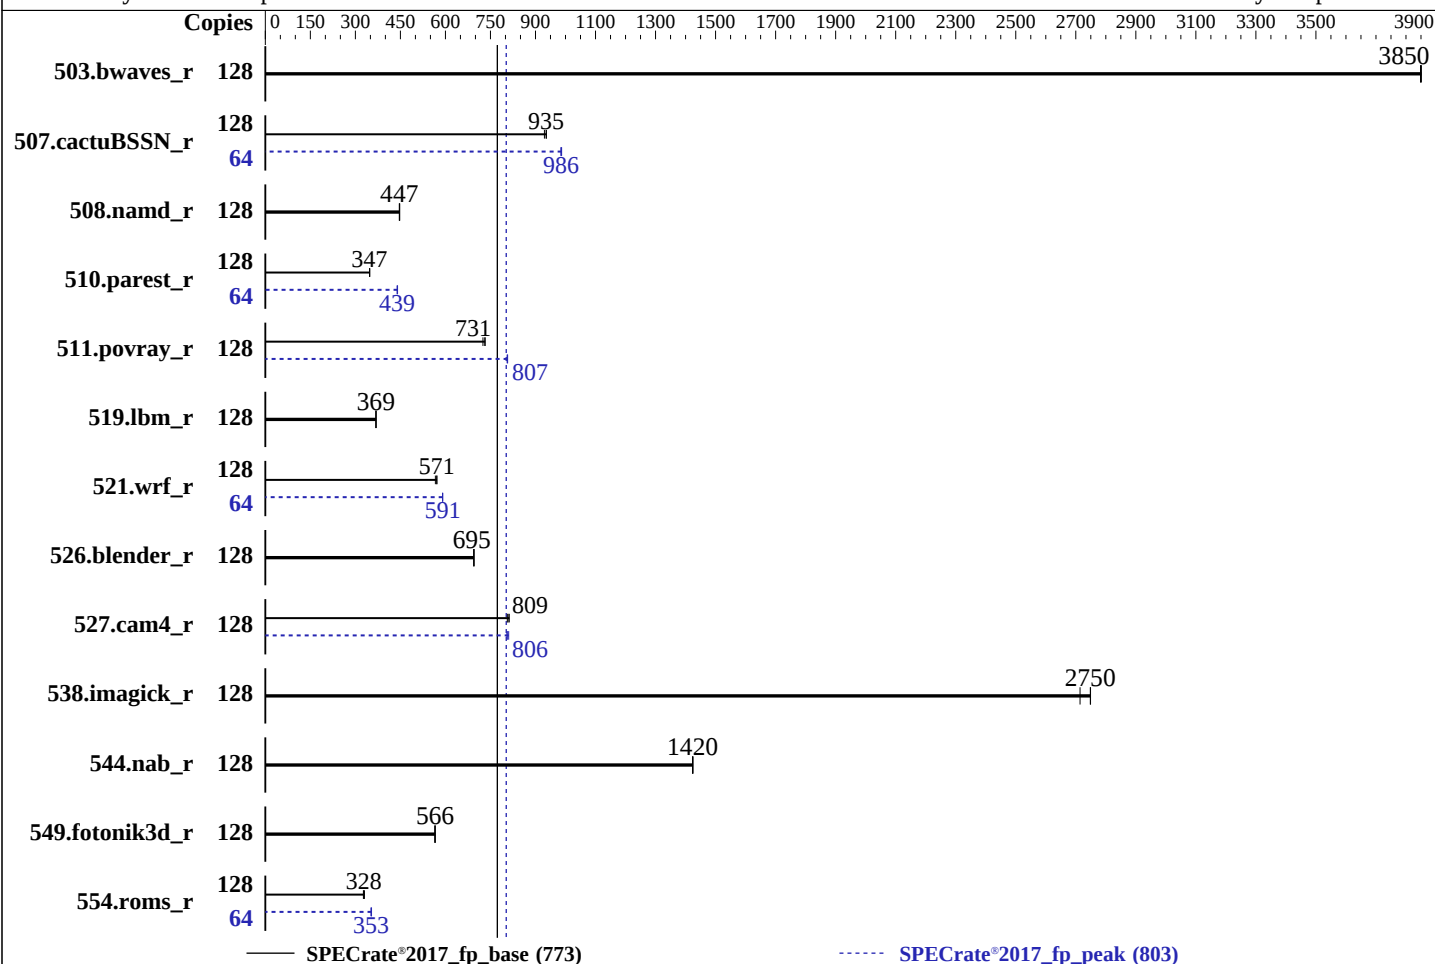

### Hardware

CPU Name: Intel Xeon Gold 6548Y+  
Max MHz: 4100  
Nominal: 2500  
Enabled: 64 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 60 MB I+D on chip per chip  
Other: None  
Memory: 512 GB (16 x 32 GB 2Rx4 PC5-5600B-R, running at 5200)  
Storage: 1 x 1.92 TB NVMe SSD  
Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP7  
Kernel 6.4.0-150700.51-default  
Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2026.0 of Intel Fortran Compiler for Linux;  
Parallel: No  
Firmware: Version 2.8 released Oct-2025  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

Mainstream SuperServer SYS-221P-C9R  
(X13DEI , Intel Xeon Gold 6548Y+)

SPECrate®2017\_fp\_base = 773

SPECrate®2017\_fp\_peak = 803

CPU2017 License: 6569

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jul-2026

Hardware Availability: Dec-2023

Software Availability: Apr-2026

## Results Table

| Benchmark       | Base   |            |             |            |            |            |             | Peak   |            |             |            |            |             |             |
|-----------------|--------|------------|-------------|------------|------------|------------|-------------|--------|------------|-------------|------------|------------|-------------|-------------|
|                 | Copies | Seconds    | Ratio       | Seconds    | Ratio      | Seconds    | Ratio       | Copies | Seconds    | Ratio       | Seconds    | Ratio      | Seconds     | Ratio       |
| 503.bwaves_r    | 128    | 334        | 3850        | 333        | 3850       | <u>333</u> | <u>3850</u> | 128    | 334        | 3850        | 333        | 3850       | <u>333</u>  | <u>3850</u> |
| 507.cactuBSSN_r | 128    | 173        | 936         | 174        | 930        | <u>173</u> | <u>935</u>  | 64     | 82.3       | 985         | 82.1       | 987        | <u>82.2</u> | <u>986</u>  |
| 508.namd_r      | 128    | 272        | 448         | 272        | 446        | <u>272</u> | <u>447</u>  | 128    | 272        | 448         | 272        | 446        | <u>272</u>  | <u>447</u>  |
| 510.parest_r    | 128    | 964        | 347         | 963        | 348        | <u>964</u> | <u>347</u>  | 64     | 380        | 441         | <u>381</u> | <u>439</u> | 381         | 439         |
| 511.povray_r    | 128    | <u>409</u> | <u>731</u>  | 412        | 725        | 408        | 732         | 128    | <u>370</u> | <u>807</u>  | 371        | 805        | 370         | 807         |
| 519.lbm_r       | 128    | 366        | 369         | 366        | 368        | <u>366</u> | <u>369</u>  | 128    | 366        | 369         | 366        | 368        | <u>366</u>  | <u>369</u>  |
| 521.wrf_r       | 128    | 506        | 567         | <u>502</u> | <u>571</u> | 501        | 572         | 64     | 243        | 591         | <u>243</u> | <u>591</u> | 243         | 590         |
| 526.blender_r   | 128    | 280        | 695         | 281        | 694        | <u>280</u> | <u>695</u>  | 128    | 280        | 695         | 281        | 694        | <u>280</u>  | <u>695</u>  |
| 527.cam4_r      | 128    | <u>277</u> | <u>809</u>  | 278        | 806        | 275        | 813         | 128    | 276        | 811         | <u>278</u> | <u>806</u> | 278         | 805         |
| 538.imagick_r   | 128    | <u>116</u> | <u>2750</u> | 117        | 2710       | 116        | 2750        | 128    | <u>116</u> | <u>2750</u> | 117        | 2710       | 116         | 2750        |
| 544.nab_r       | 128    | 151        | 1420        | 151        | 1420       | <u>151</u> | <u>1420</u> | 128    | 151        | 1420        | 151        | 1420       | <u>151</u>  | <u>1420</u> |
| 549.fotonik3d_r | 128    | 881        | 566         | 884        | 565        | <u>882</u> | <u>566</u>  | 128    | 881        | 566         | 884        | 565        | <u>882</u>  | <u>566</u>  |
| 554.roms_r      | 128    | 616        | 330         | <u>620</u> | <u>328</u> | 623        | 327         | 64     | <u>288</u> | <u>353</u>  | 287        | 354        | 289         | 352         |

SPECrate®2017\_fp\_base = 773

SPECrate®2017\_fp\_peak = 803

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

Mainstream SuperServer SYS-221P-C9R  
(X13DEI , Intel Xeon Gold 6548Y+)

SPECrate®2017\_fp\_base = 773

SPECrate®2017\_fp\_peak = 803

CPU2017 License: 6569

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jul-2026

Hardware Availability: Dec-2023

Software Availability: Apr-2026

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:

Workload Profile = HPC

SNC = Enable SNC2 (2-clusters)

LLC Dead Line Alloc = Disable

KTI Prefetch = Enable

Stale AtoS = Disable

Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Fri Jul 24 05:13:30 2026

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

- 
1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. tuned-adm active
  16. sysctl
  17. /sys/kernel/mm/transparent\_hugepage
  18. /sys/kernel/mm/transparent\_hugepage/khugepaged
  19. OS release
  20. Disk information
  21. /sys/devices/virtual/dmi/id
  22. dmidecode
  23. BIOS
- 
1. uname -a  
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT\_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)  
x86\_64 x86\_64 x86\_64 GNU/Linux
- 

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

Mainstream SuperServer SYS-221P-C9R  
(X13DEI , Intel Xeon Gold 6548Y+)

SPECrate®2017\_fp\_base = 773

SPECrate®2017\_fp\_peak = 803

CPU2017 License: 6569

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jul-2026

Hardware Availability: Dec-2023

Software Availability: Apr-2026

## Platform Notes (Continued)

2. w

```
05:13:30 up 19:32, 1 user, load average: 82.83, 116.36, 122.78
USER  TTY      FROM          LOGIN@  IDLE   JCPU   PCPU WHAT
root  tty1      -             Thu09   19:28m 0.94s  0.01s -bash
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 2062322
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 2062322
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
ic2026.0-lin-core-avx512-rate-20260429.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
ic2026.0-lin-core-avx512-rate-20260429.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.004/temlogs/preenv.fprate.004.0.log --lognum 004.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) GOLD 6548Y+
vendor_id       : GenuineIntel
cpu family      : 6
model           : 207
stepping        : 2
microcode       : 0x210002c0
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores       : 32
siblings        : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0:  core ids 0-31
physical id 1:  core ids 0-31
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

Mainstream SuperServer SYS-221P-C9R  
(X13DEI , Intel Xeon Gold 6548Y+)

SPECrate®2017\_fp\_base = 773

SPECrate®2017\_fp\_peak = 803

CPU2017 License: 6569

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jul-2026

Hardware Availability: Dec-2023

Software Availability: Apr-2026

## Platform Notes (Continued)

physical id 0: apicids 0-63

physical id 1: apicids 128-191

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.40.4:

|                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Architecture:                         | x86_64                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| CPU op-mode(s):                       | 32-bit, 64-bit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Address sizes:                        | 46 bits physical, 57 bits virtual                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Byte Order:                           | Little Endian                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| CPU(s):                               | 128                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| On-line CPU(s) list:                  | 0-127                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Vendor ID:                            | GenuineIntel                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Model name:                           | INTEL(R) XEON(R) GOLD 6548Y+                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| CPU family:                           | 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Model:                                | 207                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Thread(s) per core:                   | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Core(s) per socket:                   | 32                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Socket(s):                            | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Stepping:                             | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| BogoMIPS:                             | 5000.00                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Flags:                                | fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat<br>pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx<br>pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good<br>nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni<br>pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16<br>xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt<br>tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm<br>3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2<br>ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept<br>vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm<br>rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb<br>intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1<br>xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local<br>split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida<br>arat pln pts hfi vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2<br>gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq<br>la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm<br>md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16<br>amx_tile amx_int8 flush_l1d arch_capabilities |
| Virtualization:                       | VT-x                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| L1d cache:                            | 3 MiB (64 instances)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| L1i cache:                            | 2 MiB (64 instances)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| L2 cache:                             | 128 MiB (64 instances)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| L3 cache:                             | 120 MiB (2 instances)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| NUMA node(s):                         | 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| NUMA node0 CPU(s):                    | 0-15,64-79                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| NUMA node1 CPU(s):                    | 16-31,80-95                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| NUMA node2 CPU(s):                    | 32-47,96-111                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| NUMA node3 CPU(s):                    | 48-63,112-127                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Vulnerability Gather data sampling:   | Not affected                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Vulnerability Itlb multihit:          | Not affected                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Vulnerability L1tf:                   | Not affected                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Vulnerability Mds:                    | Not affected                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Vulnerability Meltdown:               | Not affected                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Vulnerability Mmio stale data:        | Not affected                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Vulnerability Reg file data sampling: | Not affected                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

Mainstream SuperServer SYS-221P-C9R  
(X13DEI , Intel Xeon Gold 6548Y+)

SPECrate®2017\_fp\_base = 773

SPECrate®2017\_fp\_peak = 803

CPU2017 License: 6569

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jul-2026

Hardware Availability: Dec-2023

Software Availability: Apr-2026

### Platform Notes (Continued)

Vulnerability Retbleed: Not affected  
Vulnerability Spec rstack overflow: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS SW sequence; BHI BHI\_DIS\_S  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS  | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d  | 48K      | 3M       | 12   | Data        | 1     | 64    | 1        | 64             |
| L1i  | 32K      | 2M       | 8    | Instruction | 1     | 64    | 1        | 64             |
| L2   | 2M       | 128M     | 16   | Unified     | 2     | 2048  | 1        | 64             |
| L3   | 60M      | 120M     | 15   | Unified     | 3     | 65536 | 1        | 64             |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)  
node 0 cpus: 0-15,64-79  
node 0 size: 128640 MB  
node 0 free: 89844 MB  
node 1 cpus: 16-31,80-95  
node 1 size: 129015 MB  
node 1 free: 98839 MB  
node 2 cpus: 32-47,96-111  
node 2 size: 129015 MB  
node 2 free: 99435 MB  
node 3 cpus: 48-63,112-127  
node 3 size: 128937 MB  
node 3 free: 99277 MB  
node distances:  
node 0 1 2 3  
0: 10 12 21 21  
1: 12 10 21 21  
2: 21 21 10 12  
3: 21 21 12 10

9. /proc/meminfo

MemTotal: 527982944 kB

10. who -r

run-level 3 Jul 23 09:41

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

| STATE           | UNIT FILES                                                                                                                                                                                                                                                                                                                             |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| enabled         | YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance<br>issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections<br>nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore tuned<br>wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny |
| enabled-runtime | systemd-remount-fs                                                                                                                                                                                                                                                                                                                     |

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

Mainstream SuperServer SYS-221P-C9R  
(X13DEI , Intel Xeon Gold 6548Y+)

SPECrate®2017\_fp\_base = 773

SPECrate®2017\_fp\_peak = 803

CPU2017 License: 6569

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jul-2026

Hardware Availability: Dec-2023

Software Availability: Apr-2026

### Platform Notes (Continued)

disabled      autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
                 chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info  
                 firewallld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask  
                 man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@  
                 smartd\_generate\_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext  
                 systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd udisks2  
                 vncserver@  
indirect      systemd-userdbd wickedd

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default  
root=UUID=8358bf61-4d6f-4acc-bfdf-cfc5aa7f96be  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

-----  
14. cpupower frequency-info  
analyzing CPU 57:  
Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes

-----  
15. tuned-adm active  
Current active profile: throughput-performance

-----  
16. sysctl  
kernel.numa\_balancing                    1  
kernel.randomize\_va\_space               2  
vm.compaction\_proactiveness              20  
vm.dirty\_background\_bytes                0  
vm.dirty\_background\_ratio                10  
vm.dirty\_bytes                            0  
vm.dirty\_expire\_centisecs                3000  
vm.dirty\_ratio                            40  
vm.dirty\_writeback\_centisecs              500  
vm.dirtytime\_expire\_seconds              43200  
vm.extfrag\_threshold                      500  
vm.min\_unmapped\_ratio                    1  
vm.nr\_hugepages                           0  
vm.nr\_hugepages\_mempolicy                0  
vm.nr\_overcommit\_hugepages               0  
vm.swappiness                             10  
vm.watermark\_boost\_factor                15000  
vm.watermark\_scale\_factor                10  
vm.zone\_reclaim\_mode                      0

-----  
17. /sys/kernel/mm/transparent\_hugepage  
defrag                    always defer defer+madvice [madvice] never  
enabled                   [always] madvice never  
hpage\_pmd\_size            2097152  
shmem\_enabled             always within\_size advise [never] deny force  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

Mainstream SuperServer SYS-221P-C9R  
(X13DEI , Intel Xeon Gold 6548Y+)

SPECrate®2017\_fp\_base = 773

SPECrate®2017\_fp\_peak = 803

CPU2017 License: 6569

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jul-2026

Hardware Availability: Dec-2023

Software Availability: Apr-2026

## Platform Notes (Continued)

18. /sys/kernel/mm/transparent\_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

19. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7
```

20. Disk information

SPEC is set to: /home/cpu2017

| Filesystem     | Type | Size | Used | Avail | Use% | Mounted on |
|----------------|------|------|------|-------|------|------------|
| /dev/nvme0n1p2 | xfs  | 1.8T | 166G | 1.6T  | 10%  | /          |

21. /sys/devices/virtual/dmi/id

```
Vendor: Supermicro
Product: SYS-741P-TRT
Product Family: Family
Serial: A945221X7416000
```

22. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M321R4GA3PB0-CWMKJ 32 GB 2 rank 5600, configured at 5200

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 2.8
BIOS Date: 10/08/2025
BIOS Revision: 5.32
```

## Compiler Version Notes

```
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

```
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

Mainstream SuperServer SYS-221P-C9R  
(X13DEI , Intel Xeon Gold 6548Y+)

SPECrate®2017\_fp\_base = 773

SPECrate®2017\_fp\_peak = 803

CPU2017 License: 6569

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jul-2026

Hardware Availability: Dec-2023

Software Availability: Apr-2026

## Compiler Version Notes (Continued)

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.  
=====

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

Mainstream SuperServer SYS-221P-C9R  
(X13DEI , Intel Xeon Gold 6548Y+)

SPECrate®2017\_fp\_base = 773

SPECrate®2017\_fp\_peak = 803

CPU2017 License: 6569

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jul-2026

Hardware Availability: Dec-2023

Software Availability: Apr-2026

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

Mainstream SuperServer SYS-221P-C9R  
(X13DEI , Intel Xeon Gold 6548Y+)

SPECrate®2017\_fp\_base = 773

SPECrate®2017\_fp\_peak = 803

CPU2017 License: 6569

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jul-2026

Hardware Availability: Dec-2023

Software Availability: Apr-2026

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

Mainstream SuperServer SYS-221P-C9R  
(X13DEI , Intel Xeon Gold 6548Y+)

SPECrate®2017\_fp\_base = 773

SPECrate®2017\_fp\_peak = 803

CPU2017 License: 6569

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jul-2026

Hardware Availability: Dec-2023

Software Availability: Apr-2026

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray\_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Supermicro

Mainstream SuperServer SYS-221P-C9R  
(X13DEI , Intel Xeon Gold 6548Y+)

SPECrate®2017\_fp\_base = 773

SPECrate®2017\_fp\_peak = 803

CPU2017 License: 6569

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jul-2026

Hardware Availability: Dec-2023

Software Availability: Apr-2026

## Peak Optimization Flags (Continued)

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2026-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-EMR-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2026-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-EMR-revG.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2026-07-23 17:13:30-0400.

Report generated on 2026-08-11 18:23:46 by CPU2017 PDF formatter v6716.

Originally published on 2026-08-11.