SPEC CPU®2017 Floating Point Speed Result

Lenovo Global Technology

ThinkSystem SR630 V4
(2.80 GHz, Intel Xeon 6503P)

SPECspeed®2017_fp_base = 170

SPECspeed®2017_fp_peak = Not Run

CPU2017 License:	9017	**Test Date:**	Jul-2026
Test Sponsor:	Lenovo Global Technology	**Hardware Availability:**	Aug-2026
Tested by:	Lenovo Global Technology	**Software Availability:**	Apr-2026

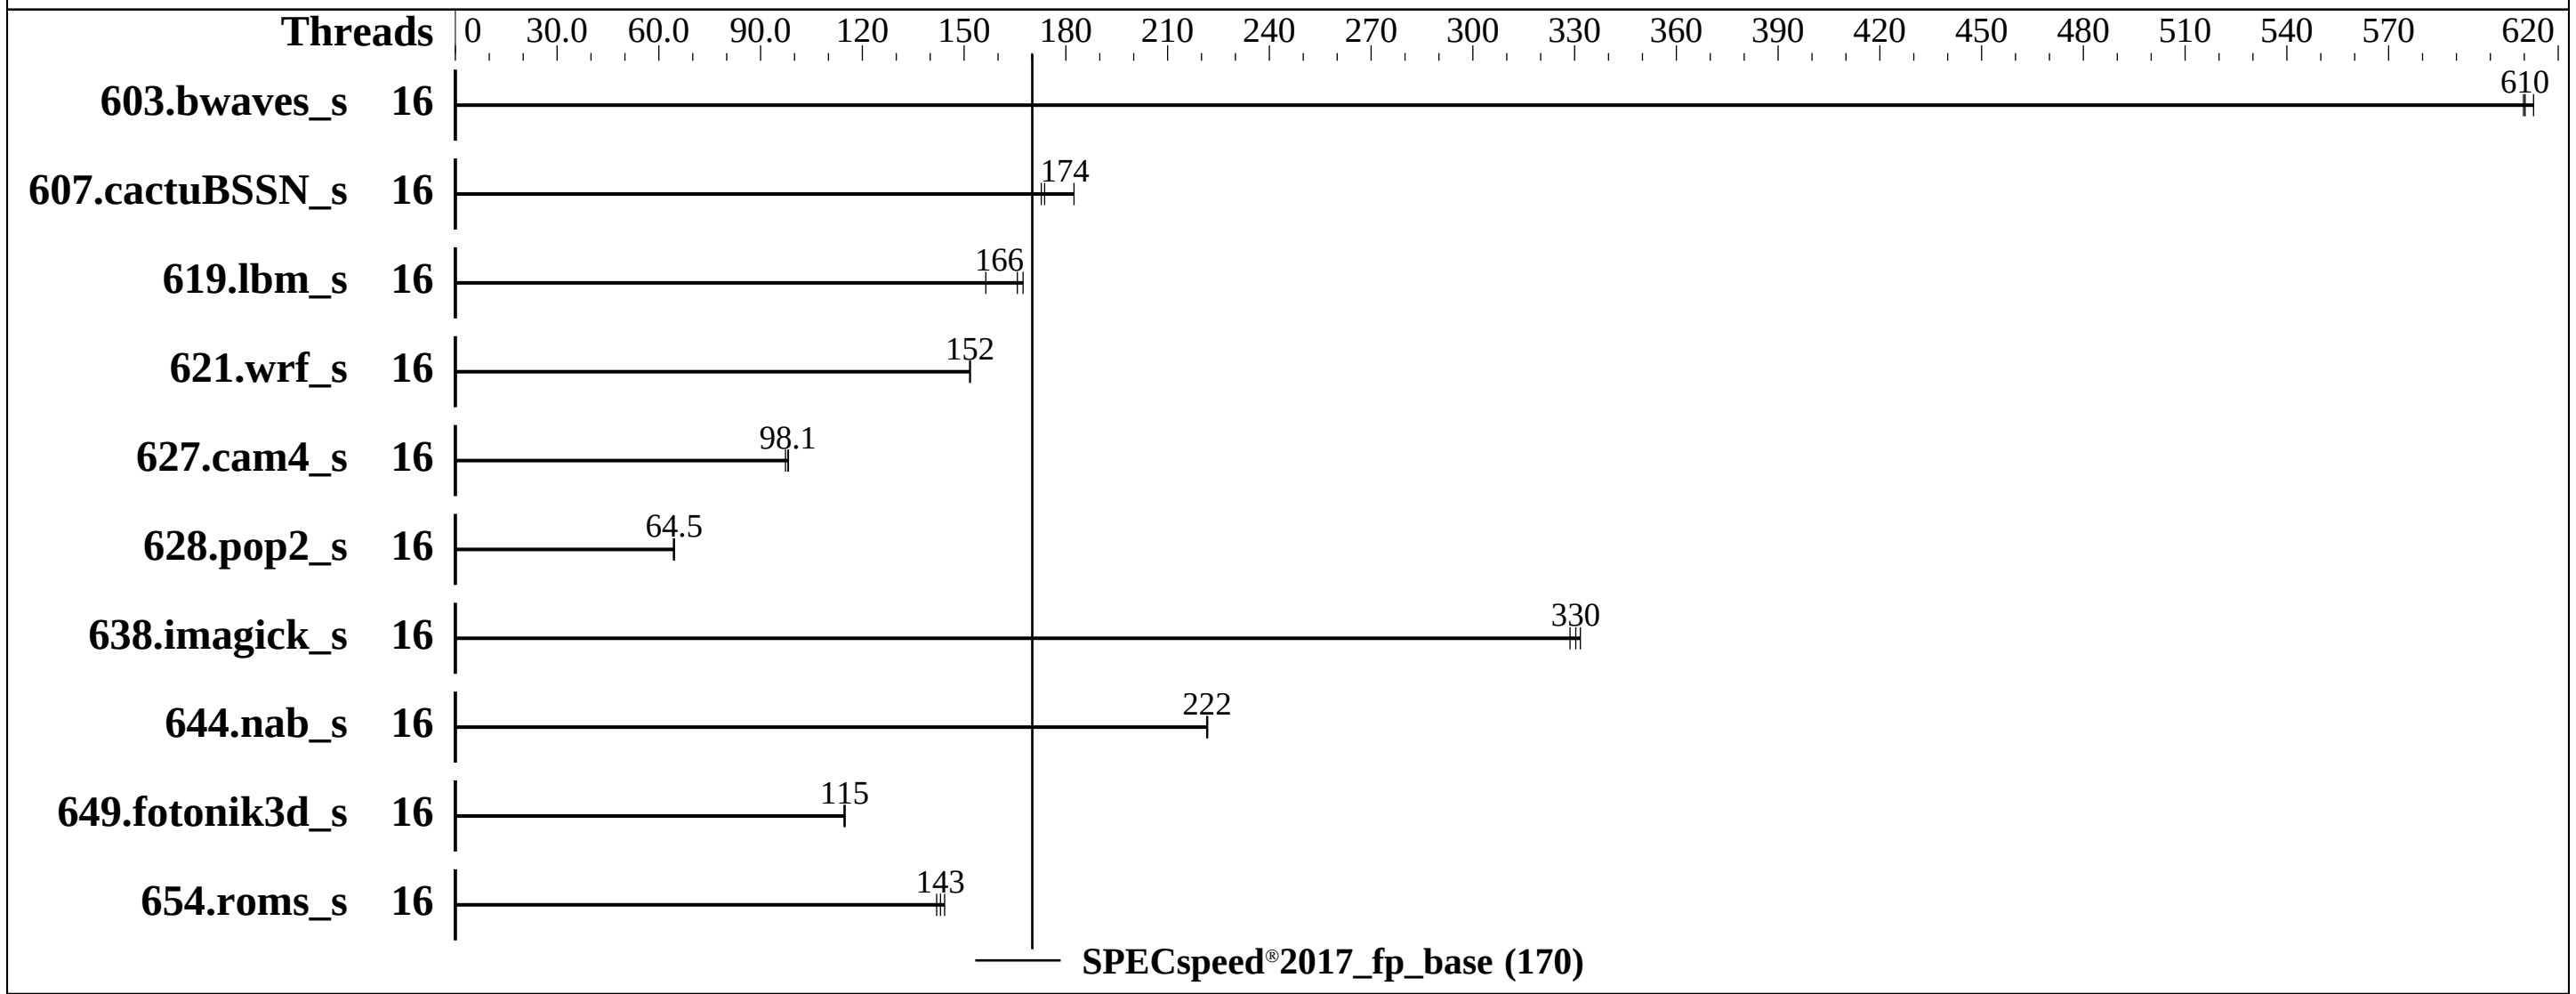

Hardware

CPU Name:	Intel Xeon 6503P
Max MHz:	4300
Nominal:	2800
Enabled:	16 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	48 MB I+D on chip per chip
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)
Storage:	1 x 960 GB NVME SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP7 Kernel 6.4.0-150700.51-default
Compiler:	C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2026.0 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	Lenovo BIOS Version IHE119P 1.51 released Jun-2026
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Speed Result

Lenovo Global Technology

ThinkSystem SR630 V4
(2.80 GHz, Intel Xeon 6503P)

SPECspeed®2017_fp_base = 170

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology
Test Date: Jul-2026
Hardware Availability: Aug-2026
Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	16	96.3	613	**96.7**	**610**	96.8	610							
607.cactuBSSN_s	16	96.5	173	91.4	182	**95.9**	**174**							
619.lbm_s	16	31.3	167	33.5	156	**31.6**	**166**							
621.wrf_s	16	87.2	152	87.1	152	**87.1**	**152**							
627.cam4_s	16	91.0	97.3	**90.4**	**98.1**	90.2	98.2							
628.pop2_s	16	184	64.6	185	64.3	**184**	**64.5**							
638.imagick_s	16	43.9	329	**43.7**	**330**	43.5	332							
644.nab_s	16	78.9	222	**78.8**	**222**	78.8	222							
649.fotonik3d_s	16	79.3	115	79.5	115	**79.4**	**115**							
654.roms_s	16	109	144	111	142	**110**	**143**							

SPECspeed®2017_fp_base = 170

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2026.0/lib/intel64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.0
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Lenovo Global Technology
ThinkSystem SR630 V4
(2.80 GHz, Intel Xeon 6503P)

SPECspeed®2017_fp_base = 170
SPECspeed®2017_fp_peak = Not Run

CPU2017 License:	9017	**Test Date:**	Jul-2026
Test Sponsor:	Lenovo Global Technology	**Hardware Availability:**	Aug-2026
Tested by:	Lenovo Global Technology	**Software Availability:**	Apr-2026

Platform Notes

```
BIOS configuration:
Workload Profile set to General Computing - Peak Frequency
Hyper-Threading set to Disabled
LLC Prefetch set to Enabled
Page Policy set to Adaptive

 Sysinfo program /home/cpu2017-1.1.9-ic2026.0/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Fri Jul 31 02:45:38 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)
   x86_64 x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    02:45:38 up  2:27,  1 user,  load average: 6.98, 13.21, 14.67
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT

 ------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

 ------------------------------------------------------------
 4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority             (-e) 0
   file size               (blocks, -f) unlimited
   pending signals                 (-i) 2063028
```

(Continued on next page)

Platform Notes (Continued)

```
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 2063028
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@notty
 /bin/bash ./02.remote_local_SPECcpu_1.02.sh
 sh Run553-compliant-ic2026.0-lin-sapphirerapids-speedfp-base-smt-off-20260429.sh
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2026.0-lin-sapphirerapids-speed-20260429.cfg --define cores=16 --tune base -o all --define drop_caches
   fpspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2026.0-lin-sapphirerapids-speed-20260429.cfg --define cores=16 --tune base --output_format all --define
   drop_caches --nopower --runmode speed --tune base --size refspeed fpspeed --nopreenv --note-preenv
   --logfile $SPEC/tmp/CPU2017.027/templogs/preenv.fpspeed.027.0.log --lognum 027.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2026.0

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6503P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x1000423
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
    cpu cores       : 8
    siblings        : 8
    2 physical ids (chips)
    16 processors (hardware threads)
    physical id 0: core ids 0-7
    physical id 1: core ids 0-7
    physical id 0: apicids 0,2,4,6,8,10,12,14
    physical id 1: apicids 128,130,132,134,136,138,140,142
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.40.4:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               16
  On-line CPU(s) list:                  0-15
```

(Continued on next page)

Platform Notes (Continued)

```
   Vendor ID:                          GenuineIntel
   Model name:                         Intel(R) Xeon(R) 6503P
   CPU family:                         6
   Model:                              173
   Thread(s) per core:                 1
   Core(s) per socket:                 8
   Socket(s):                          2
   Stepping:                           1
   BogoMIPS:                           5600.00
   Flags:                              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                       pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                       pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                       nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                       pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                                       xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                       tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                       3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                                       ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                                       vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                                       rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                                       intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                                       xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                       split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                       arat pln pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
                                       vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
                                       rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                       serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                                       amx_int8 flush_l1d arch_capabilities
   Virtualization:                     VT-x
   L1d cache:                          768 KiB (16 instances)
   L1i cache:                          1 MiB (16 instances)
   L2 cache:                           32 MiB (16 instances)
   L3 cache:                           96 MiB (2 instances)
   NUMA node(s):                       2
   NUMA node0 CPU(s):                  0-7
   NUMA node1 CPU(s):                  8-15
   Vulnerability Gather data sampling: Not affected
   Vulnerability Itlb multihit:        Not affected
   Vulnerability L1tf:                 Not affected
   Vulnerability Mds:                  Not affected
   Vulnerability Meltdown:             Not affected
   Vulnerability Mmio stale data:      Not affected
   Vulnerability Reg file data sampling: Not affected
   Vulnerability Retbleed:             Not affected
   Vulnerability Spec rstack overflow: Not affected
   Vulnerability Spec store bypass:    Mitigation; Speculative Store Bypass disabled via prctl
   Vulnerability Spectre v1:           Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:           Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                       PBRSB-eIBRS Not affected; BHI BHI_DIS_S
   Vulnerability Srbds:                Not affected
   Vulnerability Tsx async abort:      Not affected

 From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     768K   12 Data            1    64        1             64
     L1i       64K       1M   16 Instruction     1    64        1             64
     L2         2M      32M   16 Unified         2  2048        1             64
     L3        48M      96M   16 Unified         3 49152        1             64

 ------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0-7
  node 0 size: 257787 MB
  node 0 free: 256382 MB
  node 1 cpus: 8-15
  node 1 size: 257996 MB
  node 1 free: 257064 MB
  node distances:
  node   0   1
    0:  10  21
    1:  21  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       528163156 kB

------------------------------------------------------------
10. who -r
  run-level 3 Jul 31 00:18

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
                   kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections nvmf-autoconnect postfix
                   purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4
                   wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                   chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                   firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
                   kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                   serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                   systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                   systemd-timesyncd
  generated        ntp_sync
  indirect         systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
  root=UUID=86d6f980-8999-4b86-b151-7b769b6f4156
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 7:
    Unable to determine current policy
    boost state support:
      Supported: yes
```

(Continued on next page)

Platform Notes (Continued)

```
      Active: yes

 ------------------------------------------------------------
 15. sysctl
   kernel.numa_balancing              1
   kernel.randomize_va_space          2
   vm.compaction_proactiveness       20
   vm.dirty_background_bytes          0
   vm.dirty_background_ratio         10
   vm.dirty_bytes                     0
   vm.dirty_expire_centisecs       3000
   vm.dirty_ratio                    20
   vm.dirty_writeback_centisecs     500
   vm.dirtytime_expire_seconds    43200
   vm.extfrag_threshold             500
   vm.min_unmapped_ratio              1
   vm.nr_hugepages                    0
   vm.nr_hugepages_mempolicy          0
   vm.nr_overcommit_hugepages         0
   vm.swappiness                     60
   vm.watermark_boost_factor      15000
   vm.watermark_scale_factor         10
   vm.zone_reclaim_mode               0

 ------------------------------------------------------------
 16. /sys/kernel/mm/transparent_hugepage
   defrag          always defer defer+madvise [madvise] never
   enabled         [always] madvise never
   hpage_pmd_size  2097152
   shmem_enabled   always within_size advise [never] deny force

 ------------------------------------------------------------
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs   60000
   defrag                      1
   max_ptes_none             511
   max_ptes_shared           256
   max_ptes_swap              64
   pages_to_scan            4096
   scan_sleep_millisecs    10000

 ------------------------------------------------------------
 18. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP7

 ------------------------------------------------------------
 19. Disk information
 SPEC is set to: /home/cpu2017-1.1.9-ic2026.0
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/nvme0n1p3 xfs   893G  251G  643G  29% /

 ------------------------------------------------------------
 20. /sys/devices/virtual/dmi/id
     Vendor:         Lenovo
     Product:        ThinkSystem SR630 V4
     Product Family: ThinkSystem
     Serial:         0987654321

 ------------------------------------------------------------
```

(Continued on next page)

Lenovo Global Technology

ThinkSystem SR630 V4
(2.80 GHz, Intel Xeon 6503P)

SPECspeed®2017_fp_base = 170
SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology
Test Date: Jul-2026
Hardware Availability: Aug-2026
Software Availability: Apr-2026

Platform Notes (Continued)

```
 21. dmidecode
   Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     5x Samsung M321R4GA3PB2-CCPEC 32 GB 2 rank 6400
     6x Samsung M321R4GA3PB2-CCPKC 32 GB 2 rank 6400
     5x Samsung M321R4GA3PB2-CCPPC 32 GB 2 rank 6400


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Lenovo
    BIOS Version:      IHE119P-1.51
    BIOS Date:         06/11/2026
    BIOS Revision:     1.51
    Firmware Revision: 2.56
```

Compiler Version Notes

```
==============================================================================================================
C               | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifx`

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian -assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:
```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:
```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
```

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-K.html
http://www.spec.org/cpu2017/flags/Intel-ic2026-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-K.xml
http://www.spec.org/cpu2017/flags/Intel-ic2026-official-linux64.xml

Tested with SPEC CPU®2017 v1.1.9 on 2026-07-30 14:45:38-0400.
Report generated on 2026-08-27 11:28:33 by CPU2017 PS formatter v6716.
Originally published on 2026-08-26.