



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECrate®2026_int_base = 1.00

SPECrate®2026_int_energy_base = 1.00

SPECrate®2026_int_peak = 1.12

SPECrate®2026_int_energy_peak = 1.11

CPU2026 License: 6412


Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Feb-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

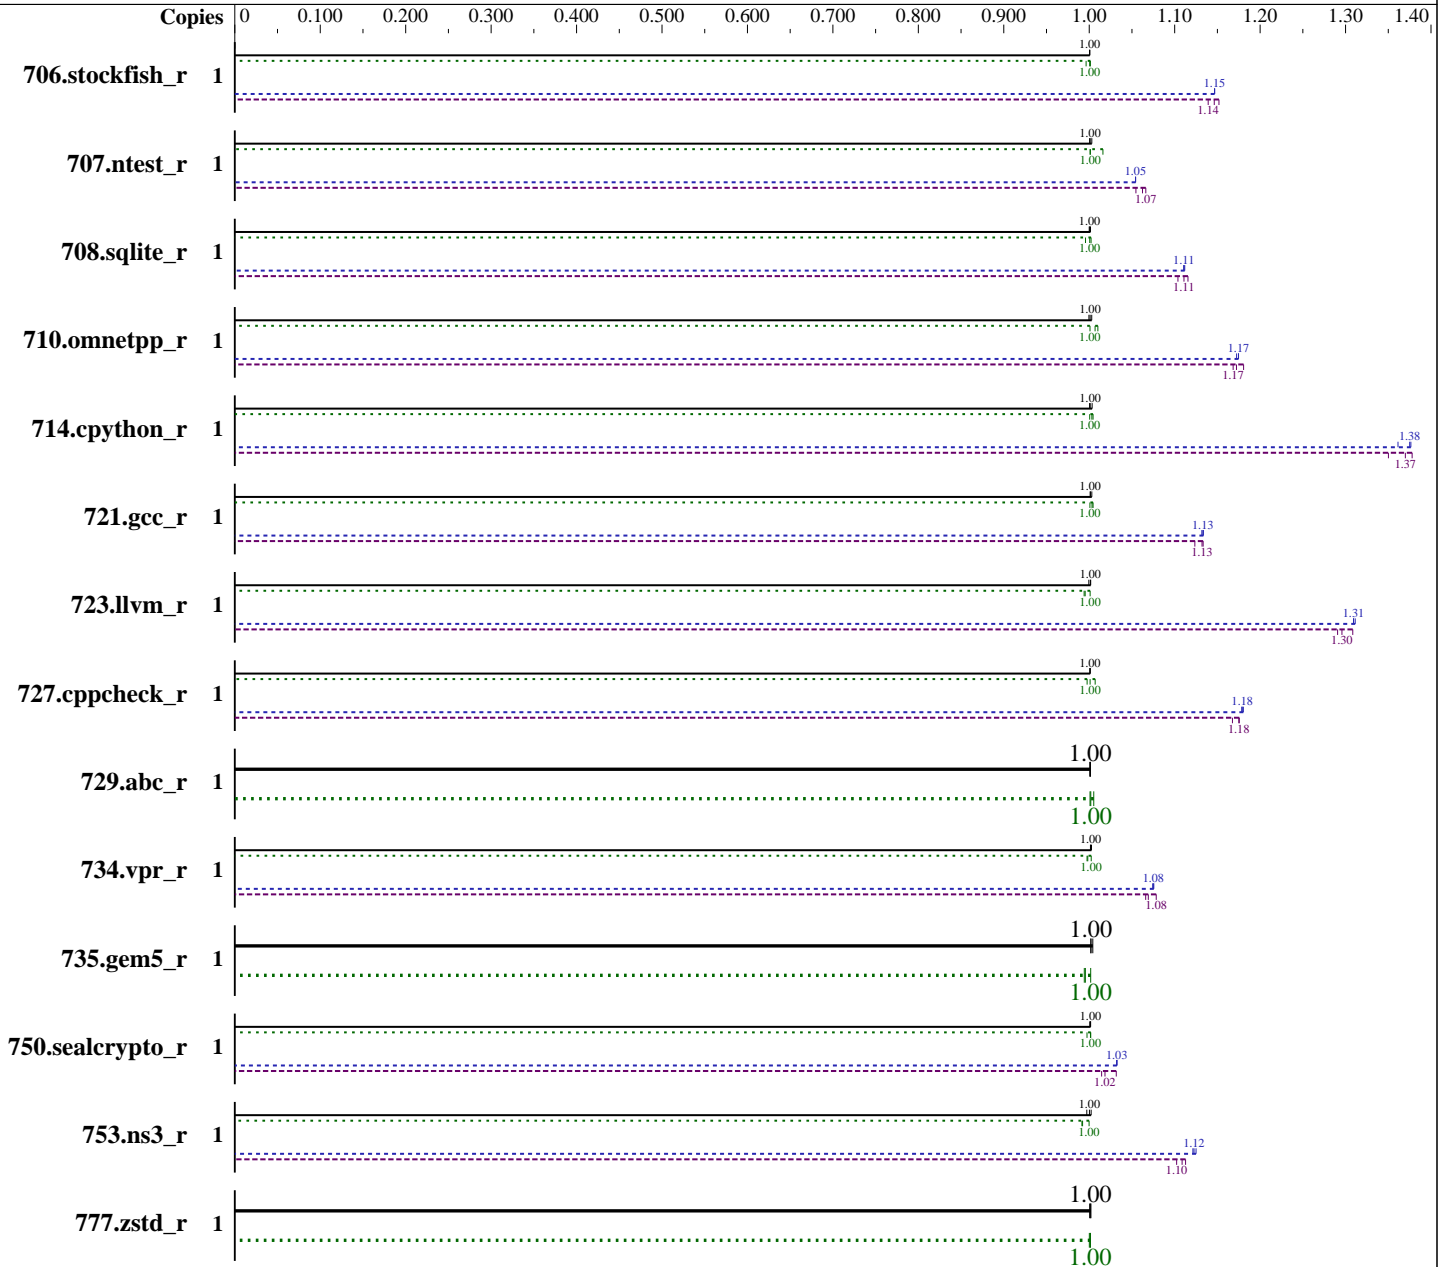



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECrate®2026_int_base = 1.00
SPECrate®2026_int_energy_base = 1.00
SPECrate®2026_int_peak = 1.12
SPECrate®2026_int_energy_peak = 1.11

CPU2026 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Feb-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Hardware

CPU Name: Ampere eMAG 8180
Max MHz: 3300
Nominal: 3000
Enabled: 32 cores, 1 chip
Orderable: 1 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 4 MB I+D on chip per chip (256 KB shared / 2 cores)
L3: 32 MB I+D on chip per chip
Other: None
Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2666V-R)
Storage: 1 x 480 GB SATA SSD
Cooling: Air
Other: None

Software

OS: Ubuntu 24.04.1 LTS kernel 6.8.0 (64KB pages)
Compiler: C/C++/Fortran: Version 15.2.0 of GCC
Compiler Category: Community
Firmware: Version 1.12 released Nov-2019
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc v5.3+, commit hash 1972241
Power Management: OS CPU governor set to "performance"

Power

Max. Power (W): 95.24
Idle Power (W): 75.85
Min. Temperature (C): 20.94
Elevation (m): 60
Line Standard: 120 V / 60 Hz / 1 phase / 2 wire
Provisioning: Line powered

Power Settings

Management FW: Version 11.05.111 of Falcon BMC
Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 1 x 550 W (non-redundant)
Details: Lenovo 03LD785 550 Watt High Efficiency Platinum AC Power Supply
Backplane: N/A
Other Storage: N/A
Storage Model #s: 1 x Lenovo 01PE965 (480GB SATA SSD) connected to on-board HBA
NICs Installed: 1 x Lenovo 01PE857 @ 10 GbE (2 ports ethernet)
NICs Enabled (FW/OS): 2 / 1
NICs Connected/Speed: 1 @ 1 Gbps
Other HW Model #s: --

Power Analyzer

Power Analyzer: cpu-reference-ptd:8000
Hardware Vendor: Yokogawa
Model: WT-310
Serial Number: T11733285
Input Connection: Serial over USB
Metrology Institute: NIST
Calibration By: Yokogawa USA
Calibration Label: T126622
Calibration Date: 13-Aug-2025
PTDaemon® Version: 1.11.3 (0c074d7d; 2025-10-15)
Setup Description: Directly connected

(Continued on next page)

Temperature Meter

Temperature Meter: cpu-reference-ptd:9000
Hardware Vendor: PCSensor
Model: USB9097+DS18B20
Serial Number: --
Input Connection: USB
PTDaemon Version: 1.11.3 (0c074d7d; 2025-10-15)
Setup Description: In front of SUT front panel primary air inlet



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

ThinkSystem HR330A (3.00 GHz Ampere eMAG 8180)

SPECrate®2026_int_base = 1.00

SPECrate®2026_int_energy_base = 1.00

SPECrate®2026_int_peak = 1.12

SPECrate®2026_int_energy_peak = 1.11

CPU2026 License: 6412

Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Feb-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

Power Analyzer (Continued)

Current Ranges Used: 5A

Voltage Range Used: 150V

Base Results Table

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
706.stockfish_r	1	1260	1.00	107	1.00	84.8	95.2	1259	1.00	107	1.00	84.9	87.6	1259	1.00	107	0.996	85.3	87.8
707.ntest_r	1	591	1.00	49.5	1.00	83.8	85.7	590	1.00	48.8	1.02	82.7	84.7	592	1.00	49.6	1.00	83.8	86.0
708.sqlite_r	1	528	1.00	44.5	0.996	84.3	89.8	527	1.00	44.2	1.00	83.8	85.6	528	1.00	44.3	1.00	83.9	86.6
710.omnetpp_r	1	485	1.00	40.9	1.00	84.2	86.4	486	1.00	40.6	1.01	83.6	85.9	485	1.00	40.5	1.01	83.6	86.0
714.cpython_r	1	477	1.00	39.9	1.00	83.6	85.8	479	1.00	39.9	1.00	83.3	85.8	478	1.00	40.0	1.00	83.6	86.3
721.gcc_r	1	685	1.00	57.8	1.00	84.3	86.8	684	1.00	57.6	1.00	84.2	86.1	685	1.00	57.6	1.00	84.1	86.1
723.llvm_r	1	506	1.00	42.5	1.00	83.9	86.1	507	1.00	42.8	0.994	84.4	86.7	506	1.00	42.7	0.995	84.4	87.3
727.cppcheck_r	1	359	1.00	29.9	1.01	83.5	87.7	359	1.00	30.2	0.998	84.3	90.2	359	1.00	30.1	1.00	84.0	89.3
729.abc_r	1	458	1.00	38.3	1.00	83.7	87.2	458	1.00	38.4	1.00	83.7	87.1	459	1.00	38.2	1.01	83.3	87.5
734.vpr_r	1	460	1.00	38.5	1.00	83.7	88.5	460	1.00	38.7	0.997	84.0	87.6	460	1.00	38.7	0.998	84.1	87.5
735.gem5_r	1	485	1.00	40.9	0.996	84.4	86.5	486	1.00	40.7	1.00	83.7	85.3	486	1.00	41.0	0.994	84.3	86.7
750.sealcrypto_r	1	535	1.00	45.2	1.00	84.4	85.9	535	1.00	45.2	1.00	84.4	86.3	536	1.00	45.4	0.997	84.7	86.3
753.ns3_r	1	613	1.00	51.5	1.00	84.0	86.1	615	0.997	51.9	0.991	84.5	88.4	612	1.00	51.9	0.992	84.8	87.3
777.zstd_r	1	643	1.00	54.0	1.00	83.9	87.4	644	1.00	54.0	1.00	83.8	86.0	643	1.00	54.0	1.00	84.1	87.1

SPECrate®2026_int_base = 1.00

SPECrate®2026_int_energy_base = 1.00

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Results Table

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
706.stockfish_r	1	1099	1.15	93.3	1.15	84.9	88.5	1099	1.15	92.9	1.15	84.5	88.5	1099	1.15	93.9	1.14	85.5	87.5
707.ntest_r	1	562	1.05	46.7	1.06	83.2	85.9	562	1.05	46.5	1.07	82.9	85.0	561	1.05	47.0	1.05	83.8	85.2
708.sqlite_r	1	475	1.11	39.9	1.11	83.9	86.3	475	1.11	39.7	1.12	83.6	86.0	475	1.11	40.1	1.10	84.4	86.7
710.omnetpp_r	1	414	1.17	34.9	1.17	84.2	86.9	414	1.17	34.7	1.18	83.8	85.4	414	1.17	35.0	1.17	84.7	86.6
714.cpython_r	1	348	1.38	29.2	1.37	83.9	86.0	348	1.38	29.1	1.38	83.5	85.7	352	1.36	29.7	1.35	84.3	86.5
721.gcc_r	1	605	1.13	51.1	1.13	84.4	87.3	605	1.13	51.0	1.13	84.3	86.7	606	1.13	51.5	1.12	84.9	86.5
723.llvm_r	1	387	1.31	32.8	1.30	84.8	87.2	387	1.31	32.5	1.31	84.1	86.2	387	1.31	33.0	1.29	85.1	87.0
727.cppcheck_r	1	304	1.18	25.7	1.18	84.3	87.7	305	1.18	25.7	1.18	84.2	88.7	304	1.18	25.8	1.17	84.9	89.8
729.abc_r	1	458	1.00	38.3	1.00	83.7	87.2	458	1.00	38.4	1.00	83.7	87.1	459	1.00	38.2	1.01	83.3	87.5
734.vpr_r	1	429	1.08	35.8	1.08	83.4	87.0	429	1.07	36.1	1.07	84.1	86.8	429	1.08	36.2	1.07	84.4	90.0
735.gem5_r	1	485	1.00	40.9	0.996	84.4	86.5	486	1.00	40.7	1.00	83.7	85.3	486	1.00	41.0	0.994	84.3	86.7
750.sealcrypto_r	1	519	1.03	43.9	1.03	84.5	87.3	519	1.03	44.4	1.02	85.5	87.2	519	1.03	44.6	1.01	85.9	87.0
753.ns3_r	1	547	1.12	46.3	1.11	84.6	86.6	545	1.13	46.4	1.11	85.2	87.9	546	1.12	46.7	1.10	85.5	87.1
777.zstd_r	1	643	1.00	54.0	1.00	83.9	87.4	644	1.00	54.0	1.00	83.8	86.0	643	1.00	54.0	1.00	84.1	87.1

SPECrate®2026_int_peak = 1.12

SPECrate®2026_int_energy_peak = 1.11

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

ThinkSystem HR330A

(3.00 GHz Ampere eMAG 8180)

SPECrate®2026_int_base = 1.00

SPECrate®2026_int_energy_base = 1.00

SPECrate®2026_int_peak = 1.12

SPECrate®2026_int_energy_peak = 1.11

CPU2026 License: 6412

Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Feb-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/usr/lib64:/usr/lib:/lib64:/home/mjm/jemalloc/lib"

General Notes

jemalloc is a general purpose malloc(3) implementation that emphasizes fragmentation avoidance and scalable concurrency support. sources available from <https://github.com/jemalloc/jemalloc/tree/1972241> and built via `./configure --with-lg-quantum=3` which used system gcc-14 -O3

This benchmark result is intended to provide perspective on past power and/or performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

Platform Notes

Sysinfo program /home/mjm/RC2/bin/sysinfo
Rev: 779ab21020787073335a329f3a45e2cd
running on emag Tue Feb 24 05:20:02 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. `uname -srvm`
2. `w`
3. Username
4. `ulimit -a`
5. `sysinfo process ancestry`

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

ThinkSystem HR330A

(3.00 GHz Ampere eMAG 8180)

SPECrate®2026_int_base = 1.00

SPECrate®2026_int_energy_base = 1.00

SPECrate®2026_int_peak = 1.12

SPECrate®2026_int_energy_peak = 1.11

CPU2026 License: 6412

Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Feb-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

Platform Notes (Continued)

- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 255 (255.4-lubuntu8.8)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. sysctl
- 15. /sys/kernel/mm/transparent_hugepage
- 16. /sys/kernel/mm/transparent_hugepage/khugepaged
- 17. OS release
- 18. Disk information
- 19. /sys/devices/virtual/dmi/id
- 20. dmidecode
- 21. BIOS

```
1. uname -srvm
Linux 6.8.0 #1 SMP PREEMPT_DYNAMIC Fri Feb 28 00:25:30 UTC 2025 aarch64
```

```
2. w
05:20:02 up 67 days, 5:44, 3 users, load average: 0.25, 0.09, 0.03
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
mjm           10.13.114.186 28Jan26      3days      0.00s      0.02s    sshd: mjm [priv]
mjm           10.41.42.178 03:26       3days      0.00s      0.02s    sshd: mjm [priv]
```

```
3. Username
From environment variable $USER: mjm
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 16691648
process            128681
nofiles            1024
vmemory(kbytes)    unlimited
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

ThinkSystem HR330A

(3.00 GHz Ampere eMAG 8180)

SPECrate®2026_int_base = 1.00

SPECrate®2026_int_energy_base = 1.00

SPECrate®2026_int_peak = 1.12

SPECrate®2026_int_energy_peak = 1.11

CPU2026 License: 6412

Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Feb-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

Platform Notes (Continued)

locks unlimited
rtprio 0

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --system --deserialize=66
SCREEN
-bin/tcsh
runcpu --flagsurl=$SPEC/config/flags/gcc.xml -C 1 -c emag-golden --reportable -n 3 --tune=base,peak --power
intrate fprate
runcpu --flagsurl $SPEC/config/flags/gcc.xml --copies 1 --configfile emag-golden --reportable --iterations 3
--tune base,peak --power --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv
--logfile $SPEC/tmp/CPU2026.071/templogs/preenv.intrate.071.0.log --lognum 071.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo -f
$SPEC = /home/mjm/RC2
```

6. /proc/cpuinfo

```
CPU implementer : 0x50
CPU architecture: 8
CPU variant : 0x3
CPU part : 0x000
CPU revision : 2
Features : fp asimd evtstrm aes pmull sha1 sha2 crc32 cpuid
```

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture: aarch64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 32
On-line CPU(s) list: 0-31
Vendor ID: APM
Model name: -
Model: 2
Thread(s) per core: 1
Core(s) per socket: 32
Socket(s): 1
Stepping: 0x3
Frequency boost: disabled
CPU(s) scaling MHz: 100%
CPU max MHz: 2911.7639
CPU min MHz: 363.9700
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

ThinkSystem HR330A

(3.00 GHz Ampere eMAG 8180)

SPECrate®2026_int_base = 1.00

SPECrate®2026_int_energy_base = 1.00

SPECrate®2026_int_peak = 1.12

SPECrate®2026_int_energy_peak = 1.11

CPU2026 License: 6412

Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Feb-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

Platform Notes (Continued)

```

BogoMIPS: 80.00
Flags: fp asimd evtstrm aes pmull sha1 sha2 crc32 cpuid
L1d cache: 1 MiB (32 instances)
L1i cache: 1 MiB (32 instances)
L2 cache: 4 MiB (16 instances)
NUMA node(s): 1
NUMA node0 CPU(s): 0-31
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Mitigation; PTI
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Vulnerable
Vulnerability Spectre v1: Mitigation; __user pointer sanitization
Vulnerability Spectre v2: Vulnerable
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1			
L1i	32K	1M	8	Instruction	1			
L2	256K	4M	32	Unified	2			

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0-31
node 0 size: 130403 MB
node 0 free: 123051 MB
node distances:
node 0
0: 10

```

9. /proc/meminfo

MemTotal: 133533376 kB

10. who -r

run-level 5 Dec 18 23:35

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

ThinkSystem HR330A

(3.00 GHz Ampere eMAG 8180)

SPECrate®2026_int_base = 1.00

SPECrate®2026_int_energy_base = 1.00

SPECrate®2026_int_peak = 1.12

SPECrate®2026_int_energy_peak = 1.11

CPU2026 License: 6412

Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Feb-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

Platform Notes (Continued)

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.8)

Default Target	Status
graphical	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate power-profiles-daemon rsync secureboot-db setvtrgb snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell ipmievd iscsid nftables rsync ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysextr systemd-time-wait-sync
generated	openipmi perlbald
indirect	serial-getty@ systemd-sysupdate systemd-sysupdate-reboot uidd
masked	cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.8.0
root=UUID=16268541-06d0-4374-97ca-2d512d4db26f
ro
cma=1024M
iommu.passthrough=1
```

14. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

ThinkSystem HR330A

(3.00 GHz Ampere eMAG 8180)

SPECrate®2026_int_base = 1.00

SPECrate®2026_int_energy_base = 1.00

SPECrate®2026_int_peak = 1.12

SPECrate®2026_int_energy_peak = 1.11

CPU2026 License: 6412

Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Feb-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

Platform Notes (Continued)

```

vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold        500
vm.min_unmapped_ratio       1
vm.nr_hugepages              0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages   0
vm.swappiness                 60
vm.watermark_boost_factor    15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode         0

```

```

-----
15. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         always [madvise] never
hpage_pmd_size 536870912
shmem_enabled   always within_size advise [never] deny force

```

```

-----
16. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none          8191
max_ptes_shared        4096
max_ptes_swap          1024
pages_to_scan          65536
scan_sleep_millisecs   10000

```

```

-----
17. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.1 LTS

```

```

-----
18. Disk information
SPEC is set to: /home/mjm/RC2
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/sda2   ext4  439G  277G  139G  67% /

```

```

-----
19. /sys/devices/virtual/dmi/id
Vendor:      Lenovo
Product:     HR330A          7X33CTO1WW
Product Family: Lenovo ThinkSystem HR330A/HR350A

```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

ThinkSystem HR330A

(3.00 GHz Ampere eMAG 8180)

SPECrate®2026_int_base = 1.00

SPECrate®2026_int_energy_base = 1.00

SPECrate®2026_int_peak = 1.12

SPECrate®2026_int_energy_peak = 1.11

CPU2026 License: 6412

Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Feb-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

Platform Notes (Continued)

20. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Samsung M393A2K43CB2-CTD 16 GB 2 rank 2667

21. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: LENOVO
BIOS Version: HVE104N-1.12
BIOS Date: 11/29/2019
BIOS Revision: 1.12
Firmware Revision: 1.7

Power Settings Notes

OS CPU governor was set using the command:

```
echo performance | tee /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor
```

Compiler Version Notes

```
C | 708.sqlite_r(base, peak) 714.cpython_r(base, peak) 777.zstd_r(base, peak)
```

gcc (GCC) 15.2.0

Copyright (C) 2025 Free Software Foundation, Inc.

This is free software; see the source for copying conditions. There is NO warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

```
C++ | 706.stockfish_r(base, peak) 707.ntest_r(base, peak)
    | 727.cppcheck_r(base, peak) 753.ns3_r(base, peak)
```

g++ (GCC) 15.2.0

Copyright (C) 2025 Free Software Foundation, Inc.

This is free software; see the source for copying conditions. There is NO

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

ThinkSystem HR330A

(3.00 GHz Ampere eMAG 8180)

SPECrate®2026_int_base = 1.00

SPECrate®2026_int_energy_base = 1.00

SPECrate®2026_int_peak = 1.12

SPECrate®2026_int_energy_peak = 1.11

CPU2026 License: 6412

Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Feb-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

Compiler Version Notes (Continued)

warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

```

=====
C++, C | 710.omnetpp_r(base pass 0, peak pass 1, peak pass 2) 721.gcc_r(base
      | pass 0, peak pass 1, peak pass 2) 723.llvm_r(base pass 0, peak pass
      | 1, peak pass 2) 729.abc_r(base pass 0, peak pass 0) 734.vpr_r(base
      | pass 0, peak pass 1, peak pass 2) 735.gem5_r(base pass 0, peak pass
      | 0) 750.sealcrypto_r(base pass 0, peak pass 1, peak pass 2)
=====

```

g++ (GCC) 15.2.0

Copyright (C) 2025 Free Software Foundation, Inc.

This is free software; see the source for copying conditions. There is NO warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

```

=====
C++, C | 710.omnetpp_r(base pass 0, peak pass 1, peak pass 2) 721.gcc_r(base
      | pass 0, peak pass 1, peak pass 2) 723.llvm_r(base pass 0, peak pass
      | 1, peak pass 2) 729.abc_r(base pass 0, peak pass 0) 734.vpr_r(base
      | pass 0, peak pass 1, peak pass 2) 735.gem5_r(base pass 0, peak pass
      | 0) 750.sealcrypto_r(base pass 0, peak pass 1, peak pass 2)
=====

```

gcc (GCC) 15.2.0

Copyright (C) 2025 Free Software Foundation, Inc.

This is free software; see the source for copying conditions. There is NO warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

```

=====
C++, C | 710.omnetpp_r(base pass 0, peak pass 1, peak pass 2) 721.gcc_r(base
      | pass 0, peak pass 1, peak pass 2) 723.llvm_r(base pass 0, peak pass
      | 1, peak pass 2) 729.abc_r(base pass 0, peak pass 0) 734.vpr_r(base
      | pass 0, peak pass 1, peak pass 2) 735.gem5_r(base pass 0, peak pass
      | 0) 750.sealcrypto_r(base pass 0, peak pass 1, peak pass 2)
=====

```

g++ (GCC) 15.2.0

Copyright (C) 2025 Free Software Foundation, Inc.

This is free software; see the source for copying conditions. There is NO warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

```

=====
C++, C | 710.omnetpp_r(base pass 0, peak pass 1, peak pass 2) 721.gcc_r(base
      | pass 0, peak pass 1, peak pass 2) 723.llvm_r(base pass 0, peak pass

```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

ThinkSystem HR330A

(3.00 GHz Ampere eMAG 8180)

SPECrate®2026_int_base = 1.00

SPECrate®2026_int_energy_base = 1.00

SPECrate®2026_int_peak = 1.12

SPECrate®2026_int_energy_peak = 1.11

CPU2026 License: 6412

Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Feb-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

Compiler Version Notes (Continued)

```

| 1, peak pass 2) 729.abc_r(base pass 0, peak pass 0) 734.vpr_r(base
| pass 0, peak pass 1, peak pass 2) 735.gem5_r(base pass 0, peak pass
| 0) 750.sealcrypto_r(base pass 0, peak pass 1, peak pass 2)

```

gcc (GCC) 15.2.0

Copyright (C) 2025 Free Software Foundation, Inc.

This is free software; see the source for copying conditions. There is NO warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

Base Compiler Invocation

C benchmarks:

gcc

C++ benchmarks:

g++

Benchmarks using both C and C++:

g++ gcc

Base Portability Flags

706.stockfish_r: -DSPEC_LP64

707.ntest_r: -DSPEC_LP64

708.sqlite_r: -DSPEC_LP64

710.omnetpp_r: -fno-finite-math-only -DSPEC_LP64

714.cpython_r: -DSPEC_LP64

721.gcc_r: -DSPEC_LP64

723.llvm_r: -DSPEC_LP64

727.cppcheck_r: -DSPEC_LP64

729.abc_r: -DSPEC_LP64

734.vpr_r: -fno-finite-math-only -DSPEC_LP64

735.gem5_r: -fno-finite-math-only -DSPEC_LP64

750.sealcrypto_r: -DSPEC_LP64

753.ns3_r: -fno-finite-math-only -DSPEC_LP64

777.zstd_r: -DSPEC_LP64



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

ThinkSystem HR330A

(3.00 GHz Ampere eMAG 8180)

SPECrate®2026_int_base = 1.00

SPECrate®2026_int_energy_base = 1.00

SPECrate®2026_int_peak = 1.12

SPECrate®2026_int_energy_peak = 1.11

CPU2026 License: 6412

Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Feb-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

Base Optimization Flags

C benchmarks:

```
-mabi=lp64 -std=c18 -g -O3 -ffast-math -mcpu=native -flto=16
-L/home/mjm/jemalloc/lib -ljemalloc
```

C++ benchmarks:

```
706.stockfish_r: -mabi=lp64 -std=c++17 -g -O3 -ffast-math -mcpu=native
-flto=16 -pthread -L/home/mjm/jemalloc/lib -ljemalloc
```

```
707.ntest_r: -mabi=lp64 -std=c++17 -g -O3 -ffast-math -mcpu=native
-flto=16 -L/home/mjm/jemalloc/lib -ljemalloc
```

727.cppcheck_r: Same as 707.ntest_r

753.ns3_r: Same as 707.ntest_r

Benchmarks using both C and C++:

```
710.omnetpp_r: -mabi=lp64 -std=c++17 -std=c18 -g -O3 -ffast-math
-mcpu=native -flto=16 -L/home/mjm/jemalloc/lib
-ljemalloc
```

721.gcc_r: Same as 710.omnetpp_r

```
723.llvm_r: -mabi=lp64 -std=c++17 -std=c18 -g -O3 -ffast-math
-mcpu=native -flto=16 -pthread -L/home/mjm/jemalloc/lib
-ljemalloc
```

729.abc_r: Same as 710.omnetpp_r

734.vpr_r: Same as 710.omnetpp_r

735.gem5_r: Same as 723.llvm_r

750.sealcrypto_r: Same as 710.omnetpp_r

Peak Compiler Invocation

C benchmarks:

```
gcc
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

ThinkSystem HR330A

(3.00 GHz Ampere eMAG 8180)

SPECrate®2026_int_base = 1.00

SPECrate®2026_int_energy_base = 1.00

SPECrate®2026_int_peak = 1.12

SPECrate®2026_int_energy_peak = 1.11

CPU2026 License: 6412

Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Feb-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

Peak Compiler Invocation (Continued)

C++ benchmarks:

g++

Benchmarks using both C and C++:

g++ gcc

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

708.sqlite_r: -mabi=lp64 -std=c18 -fprofile-generate -fprofile-use -g
-Ofast -mcpu=native -flto=16 -L/home/mjm/jemalloc/lib
-ljemalloc

714.cpython_r: Same as 708.sqlite_r

777.zstd_r: basepeak = yes

C++ benchmarks:

706.stockfish_r: -mabi=lp64 -std=c++17 -fprofile-generate -fprofile-use
-g -Ofast -mcpu=native -flto=16 -pthread
-L/home/mjm/jemalloc/lib -ljemalloc

707.ntest_r: -mabi=lp64 -std=c++17 -fprofile-generate -fprofile-use
-g -Ofast -mcpu=native -flto=16
-L/home/mjm/jemalloc/lib -ljemalloc

727.cppcheck_r: Same as 707.ntest_r

753.ns3_r: Same as 707.ntest_r

Benchmarks using both C and C++:

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

ThinkSystem HR330A

(3.00 GHz Ampere eMAG 8180)

SPECrate®2026_int_base = 1.00

SPECrate®2026_int_energy_base = 1.00

SPECrate®2026_int_peak = 1.12

SPECrate®2026_int_energy_peak = 1.11

CPU2026 License: 6412

Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Feb-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

Peak Optimization Flags (Continued)

710.omnetpp_r: -mabi=lp64 -std=c++17 -std=c18 -fprofile-generate
-fprofile-use -g -Ofast -mcpu=native -fltto=16
-L/home/mjm/jemalloc/lib -ljemalloc

721.gcc_r: Same as 710.omnetpp_r

723.llvm_r: -mabi=lp64 -std=c++17 -std=c18 -fprofile-generate
-fprofile-use -g -Ofast -mcpu=native -fltto=16 -pthread
-L/home/mjm/jemalloc/lib -ljemalloc

729.abc_r: basepeak = yes

734.vpr_r: Same as 710.omnetpp_r

735.gem5_r: basepeak = yes

750.sealcrypto_r: Same as 710.omnetpp_r

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/gcc-rev-A2.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2026/results/flags/gcc-rev-A2.xml>

PTDaemon, SPEC CPU, and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.903.0 on 2026-02-24 00:20:00-0500.

Report generated on 2026-05-04 23:26:38 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.