



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices (AMD))  
Hyper A+ Server AS -1116CS-TN  
(H14DSH , AMD EPYC 9375F)

SPECspeed®2026\_int\_base = 5.14

SPECspeed®2026\_int\_peak = 5.14

CPU2026 License: 6570


Test Sponsor: Advanced Micro Devices (AMD)

Tested by: Advanced Micro Devices (AMD)

Test Date: Feb-2026

Hardware Availability: Oct-2024

Software Availability: Jan-2026

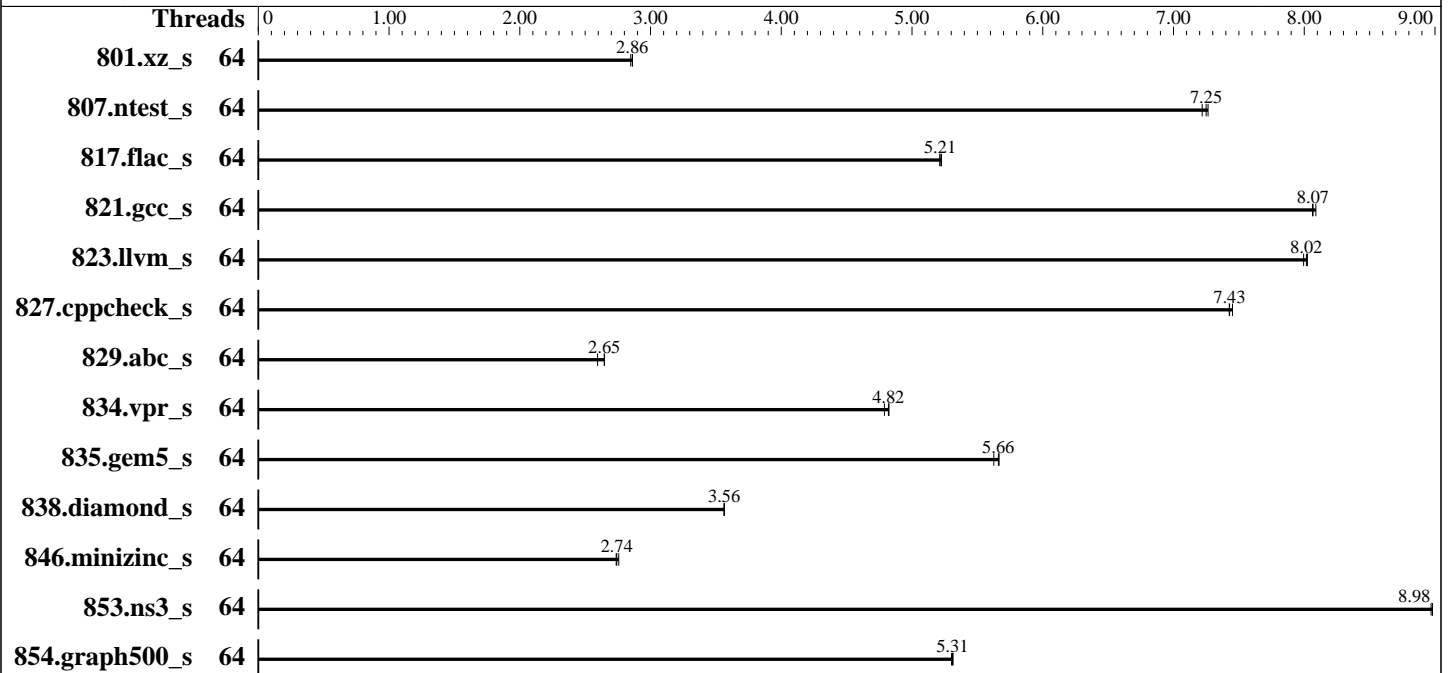

### Hardware

CPU Name: AMD EPYC 9375F  
 Max MHz: 4800  
 Nominal: 3800  
 Enabled: 32 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 32 MB shared / 4 cores  
 Other: None  
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R)  
 Storage: 1 x 3.84 TB NVMe SSD  
 Cooling: Air  
 Other: None

### Software

OS: Ubuntu 24.04.3 LTS  
 Kernel 6.8.0-94-generic  
 Compiler: C/C++: Version 5.1.0 of AOCC  
 Compiler Category: Vendor  
 Firmware: Version 1.5a released Aug-2025  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices (AMD))  
Hyper A+ Server AS -1116CS-TN  
(H14DSH , AMD EPYC 9375F)

SPECspeed®2026\_int\_base = 5.14

SPECspeed®2026\_int\_peak = 5.14

CPU2026 License: 6570

Test Sponsor: Advanced Micro Devices (AMD)

Tested by: Advanced Micro Devices (AMD)

Test Date: Feb-2026

Hardware Availability: Oct-2024

Software Availability: Jan-2026

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
801.xz_s	64	207	2.86	<b>207</b>	<b>2.86</b>	207	2.85	64	207	2.86	<b>207</b>	<b>2.86</b>	207	2.85
807.ntest_s	64	157	7.26	<b>157</b>	<b>7.25</b>	158	7.22	64	157	7.26	<b>157</b>	<b>7.25</b>	158	7.22
817.flac_s	64	333	5.21	<b>333</b>	<b>5.21</b>	332	5.23	64	333	5.21	<b>333</b>	<b>5.21</b>	332	5.23
821.gcc_s	64	256	8.09	<b>257</b>	<b>8.07</b>	257	8.06	64	256	8.09	<b>257</b>	<b>8.07</b>	257	8.06
823.llvm_s	64	176	8.02	<b>176</b>	<b>8.02</b>	176	8.00	64	176	8.02	<b>176</b>	<b>8.02</b>	176	8.00
827.cppcheck_s	64	<b>151</b>	<b>7.43</b>	151	7.43	150	7.45	64	<b>151</b>	<b>7.43</b>	151	7.43	150	7.45
829.abc_s	64	320	2.59	<b>314</b>	<b>2.65</b>	314	2.65	64	320	2.59	<b>314</b>	<b>2.65</b>	314	2.65
834.vpr_s	64	198	4.82	199	4.79	<b>198</b>	<b>4.82</b>	64	198	4.82	199	4.79	<b>198</b>	<b>4.82</b>
835.gem5_s	64	202	5.63	<b>201</b>	<b>5.66</b>	201	5.67	64	202	5.63	<b>201</b>	<b>5.66</b>	201	5.67
838.diamond_s	64	281	3.56	281	3.56	<b>281</b>	<b>3.56</b>	64	281	3.56	281	3.56	<b>281</b>	<b>3.56</b>
846.minizinc_s	64	245	2.74	243	2.76	<b>244</b>	<b>2.74</b>	64	245	2.74	243	2.76	<b>244</b>	<b>2.74</b>
853.ns3_s	64	129	8.97	128	8.98	<b>128</b>	<b>8.98</b>	64	129	8.97	128	8.98	<b>128</b>	<b>8.98</b>
854.graph500_s	64	<b>115</b>	<b>5.31</b>	115	5.31	115	5.30	64	<b>115</b>	<b>5.31</b>	115	5.31	115	5.30

SPECspeed®2026\_int\_base = **5.14**

SPECspeed®2026\_int\_peak = **5.14**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices (AMD))  
Hyper A+ Server AS -1116CS-TN  
(H14DSH , AMD EPYC 9375F)

SPECspeed®2026\_int\_base = 5.14

SPECspeed®2026\_int\_peak = 5.14

**CPU2026 License:** 6570  
**Test Sponsor:** Advanced Micro Devices (AMD)  
**Tested by:** Advanced Micro Devices (AMD)

**Test Date:** Feb-2026  
**Hardware Availability:** Oct-2024  
**Software Availability:** Jan-2026

## Operating System Notes (Continued)

To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.  
To enable Transparent Hugepages (THP) for all allocations, 'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and 'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-63"  
LD\_LIBRARY\_PATH =  
"/spec/speccpu2026rc2speed/amd\_speed\_aocc510\_flang22\_znver5\_A\_lib/lib:/spec/speccpu2026rc2speed/amd\_speed\_aocc510\_flang22\_znver5\_A\_lib/lib32:"  
MALLOCONF = "retain:true"

## General Notes

Binaries were compiled on a system with an AMD EPYC 9754 CPU + 768 GiB Memory using Ubuntu 24.04

## Platform Notes

BIOS settings:  
Memory Target Speed = DDR6400  
TDP: 400  
PPT: 400  
Determinism Control = Manual  
Determinism Enable = Power  
TSME = Disabled  
SMEE = Disabled  
SEV Control = Disabled  
Fan Speed: Maximum

Sysinfo program /spec/speccpu2026rc2speed/bin/sysinfo  
Rev: 069f95da7e7f5d81b2ce48a82150e54f  
running on smc2351turin-os Thu Feb 5 18:24:29 2026

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -srvm
2. w

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices (AMD))  
Hyper A+ Server AS -1116CS-TN  
(H14DSH , AMD EPYC 9375F)

SPECspeed®2026\_int\_base = 5.14

SPECspeed®2026\_int\_peak = 5.14

CPU2026 License: 6570

Test Sponsor: Advanced Micro Devices (AMD)

Tested by: Advanced Micro Devices (AMD)

Test Date: Feb-2026

Hardware Availability: Oct-2024

Software Availability: Jan-2026

## Platform Notes (Continued)

- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 255 (255.4-lubuntu8.10)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent\_hugepage
- 17. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
-----
1. uname -srvrn
Linux 6.8.0-94-generic #96-Ubuntu SMP PREEMPT_DYNAMIC Fri Jan 9 20:36:55 UTC 2026 x86_64
-----
```

```
-----
2. w
18:24:29 up 33 min, 2 users, load average: 0.00, 0.00, 0.00
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
amd       10.252.48.220 18:17        33:11       0.00s      0.01s    sshd: amd [priv]
amd       10.252.48.220 18:17        33:11       0.00s      0.01s    sshd: amd [priv]
-----
```

```
-----
3. Username
From environment variable $USER:  root
From the command 'logname':      amd
-----
```

```
-----
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
-----
```

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices (AMD))  
Hyper A+ Server AS -1116CS-TN  
(H14DSH , AMD EPYC 9375F)

SPECspeed®2026\_int\_base = 5.14

SPECspeed®2026\_int\_peak = 5.14

**CPU2026 License:** 6570  
**Test Sponsor:** Advanced Micro Devices (AMD)  
**Tested by:** Advanced Micro Devices (AMD)

**Test Date:** Feb-2026  
**Hardware Availability:** Oct-2024  
**Software Availability:** Jan-2026

## Platform Notes (Continued)

```
process          3092489
nofiles          1024
vmemory(kbytes)  unlimited
locks           unlimited
rtprio          0
```

### 5. sysinfo process ancestry

```
/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: amd [priv]
sshd: amd@pts/0
-bash
sudo su - root
sudo su - root
su - root
-bash
screen -S cpu
SCREEN -S cpu
/bin/bash
python3 ./run_amd_speed_aocc510_flang22_znver5_A1.py
/bin/bash ./amd_speed_aocc510_flang22_znver5_A1.sh
runcpu --config amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 3 intspeerd
runcpu --configfile amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 3
--nopower --runmode speed --tune base --size test:train:refspeed intspeerd --nopreenv --note-preenv
--logfile $SPEC/tmp/CPU2026.001/templogs/preenv.intspeerd.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /spec/speccpu2026rc2speed
```

### 6. /proc/cpuinfo

```
model name      : AMD EPYC 9375F 32-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb002147
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 192 4K pages
cpu cores      : 32
siblings       : 64
1 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices (AMD))  
Hyper A+ Server AS -1116CS-TN  
(H14DSH , AMD EPYC 9375F)

SPECspeed®2026\_int\_base = 5.14

SPECspeed®2026\_int\_peak = 5.14

**CPU2026 License:** 6570  
**Test Sponsor:** Advanced Micro Devices (AMD)  
**Tested by:** Advanced Micro Devices (AMD)

**Test Date:** Feb-2026  
**Hardware Availability:** Oct-2024  
**Software Availability:** Jan-2026

## Platform Notes (Continued)

### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                       64
On-line CPU(s) list:         0-63
Vendor ID:                    AuthenticAMD
BIOS Vendor ID:              Advanced Micro Devices, Inc.
Model name:                   AMD EPYC 9375F 32-Core Processor
BIOS Model name:              AMD EPYC 9375F 32-Core Processor          Unknown CPU @ 3.8GHz
BIOS CPU family:              107
CPU family:                   26
Model:                        2
Thread(s) per core:           2
Core(s) per socket:           32
Socket(s):                    1
Stepping:                     1
Frequency boost:              enabled
CPU(s) scaling MHz:          101%
CPU max MHz:                  3800.0000
CPU min MHz:                  1500.0000
BogoMIPS:                     7600.02

```

```

Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
vnni avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsmr avx512_vp2intersect
flush_lld debug_swap

```

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices (AMD))  
Hyper A+ Server AS -1116CS-TN  
(H14DSH , AMD EPYC 9375F)

SPECspeed®2026\_int\_base = 5.14

SPECspeed®2026\_int\_peak = 5.14

**CPU2026 License:** 6570  
**Test Sponsor:** Advanced Micro Devices (AMD)  
**Tested by:** Advanced Micro Devices (AMD)

**Test Date:** Feb-2026  
**Hardware Availability:** Oct-2024  
**Software Availability:** Jan-2026

### Platform Notes (Continued)

```

L1d cache:                1.5 MiB (32 instances)
L1i cache:                1 MiB (32 instances)
L2 cache:                 32 MiB (32 instances)
L3 cache:                 256 MiB (8 instances)
NUMA node(s):             1
NUMA node0 CPU(s):       0-63
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:      Not affected
Vulnerability Mds:       Not affected
Vulnerability Meltdown:  Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:  Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                           always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected
Vulnerability Vmscape:   Not affected

```

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. `numactl --hardware`

```

NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0-63
node 0 size: 773200 MB
node 0 free: 771315 MB
node distances:
node 0
  0: 10

```

9. `/proc/meminfo`

MemTotal: 791756896 kB

10. `who -r`

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices (AMD))  
Hyper A+ Server AS -1116CS-TN  
(H14DSH , AMD EPYC 9375F)

SPECspeed®2026\_int\_base = 5.14

SPECspeed®2026\_int\_peak = 5.14

**CPU2026 License:** 6570  
**Test Sponsor:** Advanced Micro Devices (AMD)  
**Tested by:** Advanced Micro Devices (AMD)

**Test Date:** Feb-2026  
**Hardware Availability:** Oct-2024  
**Software Availability:** Jan-2026

## Platform Notes (Continued)

run-level 5 Feb 5 17:51

-----  
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.10)

Default Target Status  
graphical running

-----  
12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher nvme-fc-boot-connections nvme-f-autoconnect open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell ipmievd iscsid nftables rsync serial-getty@ ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext systemd-time-wait-sync upower
generated	openipmi
indirect	systemd-sysupdate systemd-sysupdate-reboot uidd
masked	cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=/vmlinuz-6.8.0-94-generic  
root=/dev/mapper/ubuntu--vg-ubuntu--lv  
ro

-----  
14. cpupower frequency-info

analyzing CPU 8:  
current policy: frequency should be within 1.50 GHz and 3.80 GHz.  
The governor "performance" may decide which speed to use within this range.  
  
boost state support:  
Supported: yes  
Active: yes  
Boost States: 0  
Total States: 3  
Pstate-P0: 3800MHz

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices (AMD))  
Hyper A+ Server AS -1116CS-TN  
(H14DSH , AMD EPYC 9375F)

SPECspeed®2026\_int\_base = 5.14

SPECspeed®2026\_int\_peak = 5.14

CPU2026 License: 6570

Test Sponsor: Advanced Micro Devices (AMD)

Tested by: Advanced Micro Devices (AMD)

Test Date: Feb-2026

Hardware Availability: Oct-2024

Software Availability: Jan-2026

## Platform Notes (Continued)

### 15. sysctl

```

kernel.numa_balancing          0
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            1

```

### 16. /sys/kernel/mm/transparent\_hugepage

```

defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

### 17. /sys/kernel/mm/transparent\_hugepage/khugepaged

```

alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000

```

### 18. OS release

```

From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS

```

### 19. Disk information

SPEC is set to: /spec/speccpu2026rc2speed

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices (AMD))  
Hyper A+ Server AS -1116CS-TN  
(H14DSH , AMD EPYC 9375F)

SPECspeed®2026\_int\_base = 5.14

SPECspeed®2026\_int\_peak = 5.14

**CPU2026 License:** 6570  
**Test Sponsor:** Advanced Micro Devices (AMD)  
**Tested by:** Advanced Micro Devices (AMD)

**Test Date:** Feb-2026  
**Hardware Availability:** Oct-2024  
**Software Availability:** Jan-2026

## Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv	ext4	3.5T	37G	3.3T	2%	/

```

20. /sys/devices/virtual/dmi/id
Vendor: Supermicro
Product: AS -1116CS-TN
Product Family: SMC H14
Serial: S931316X4B12351

```

### 21. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
12x SK Hynix HMCG94AHBRA277N 64 GB 2 rank 6400

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 1.5a  
BIOS Date: 08/11/2025  
BIOS Revision: 5.35

## Compiler Version Notes

C | 854.graph500\_s(base)

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

C++ | 807.ntest\_s(base) 827.cppcheck\_s(base) 853.ns3\_s(base)

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices (AMD))  
Hyper A+ Server AS -1116CS-TN  
(H14DSH , AMD EPYC 9375F)

SPECspeed®2026\_int\_base = 5.14

SPECspeed®2026\_int\_peak = 5.14

**CPU2026 License:** 6570  
**Test Sponsor:** Advanced Micro Devices (AMD)  
**Tested by:** Advanced Micro Devices (AMD)

**Test Date:** Feb-2026  
**Hardware Availability:** Oct-2024  
**Software Availability:** Jan-2026

## Compiler Version Notes (Continued)

```

=====
C++, C | 801.xz_s(base) 817.flac_s(base) 821.gcc_s(base) 823.llvm_s(base)
      | 829.abc_s(base) 834.vpr_s(base) 835.gem5_s(base) 838.diamond_s(base)
      | 846.minizinc_s(base)
=====

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
=====

```

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Benchmarks using both C and C++:  
clang++ clang

## Base Portability Flags

```

801.xz_s: -DSPEC_LP64
807.ntest_s: -DSPEC_LP64
817.flac_s: -DSPEC_LP64
821.gcc_s: -DSPEC_LP64
823.llvm_s: -DSPEC_LP64
827.cppcheck_s: -DSPEC_LP64
829.abc_s: -DSPEC_LP64
834.vpr_s: -fno-finite-math-only -DSPEC_LP64
835.gem5_s: -fno-finite-math-only -DSPEC_LP64
838.diamond_s: -DSPEC_LP64
846.minizinc_s: -DSPEC_LP64
853.ns3_s: -fno-finite-math-only -DSPEC_LP64
854.graph500_s: -DSPEC_LP64

```



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices (AMD))  
Hyper A+ Server AS -1116CS-TN  
(H14DSH , AMD EPYC 9375F)

SPECspeed®2026\_int\_base = 5.14

SPECspeed®2026\_int\_peak = 5.14

CPU2026 License: 6570

Test Sponsor: Advanced Micro Devices (AMD)

Tested by: Advanced Micro Devices (AMD)

Test Date: Feb-2026

Hardware Availability: Oct-2024

Software Availability: Jan-2026

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3 -flto
-march=znver5 -fveclib=AMDLIBM -ffast-math -zopt -fremap-arrays
-fstrip-mining -fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50
-fopenmp -DSPEC_OPENMP -lamdalloc -lamdlibm -fopenmp=libomp -lomp
```

C++ benchmarks:

```
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -fopenmp -DSPEC_OPENMP
-fvirtual-function-elimination -fvisibility=hidden -lamdalloc
-lamdlibm -fopenmp=libomp -lomp
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -zopt -fremap-arrays -fstrip-mining
-fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-fopenmp -DSPEC_OPENMP -fvirtual-function-elimination
-fvisibility=hidden -lamdalloc -lamdlibm -fopenmp=libomp -lomp
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type
```

Benchmarks using both C and C++:

```
-Wno-return-type
```

## Peak Optimization Flags

C benchmarks:

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices (AMD))  
Hyper A+ Server AS -1116CS-TN  
(H14DSH , AMD EPYC 9375F)

SPECspeed®2026\_int\_base = 5.14

SPECspeed®2026\_int\_peak = 5.14

CPU2026 License: 6570

Test Sponsor: Advanced Micro Devices (AMD)

Tested by: Advanced Micro Devices (AMD)

Test Date: Feb-2026

Hardware Availability: Oct-2024

Software Availability: Jan-2026

## Peak Optimization Flags (Continued)

854.graph500\_s: basepeak = yes

C++ benchmarks:

807.ntest\_s: basepeak = yes

827.cppcheck\_s: basepeak = yes

853.ns3\_s: basepeak = yes

Benchmarks using both C and C++:

801.xz\_s: basepeak = yes

817.flac\_s: basepeak = yes

821.gcc\_s: basepeak = yes

823.llvm\_s: basepeak = yes

829.abc\_s: basepeak = yes

834.vpr\_s: basepeak = yes

835.gem5\_s: basepeak = yes

838.diamond\_s: basepeak = yes

846.minizinc\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Supermicro-Platform-Settings-V1.2-Turin-revG.html>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Supermicro-Platform-Settings-V1.2-Turin-revG.xml>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-05 13:24:28-0500.

Report generated on 2026-05-04 23:30:44 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.