



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
(3.00 GHz Ampere eMAG 8180)

SPECrate®2026\_int\_base = 25.3  
SPECrate®2026\_int\_energy\_base = 9.88  
SPECrate®2026\_int\_peak = 27.9  
SPECrate®2026\_int\_energy\_peak = 10.8

CPU2026 License: 6412


Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Apr-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

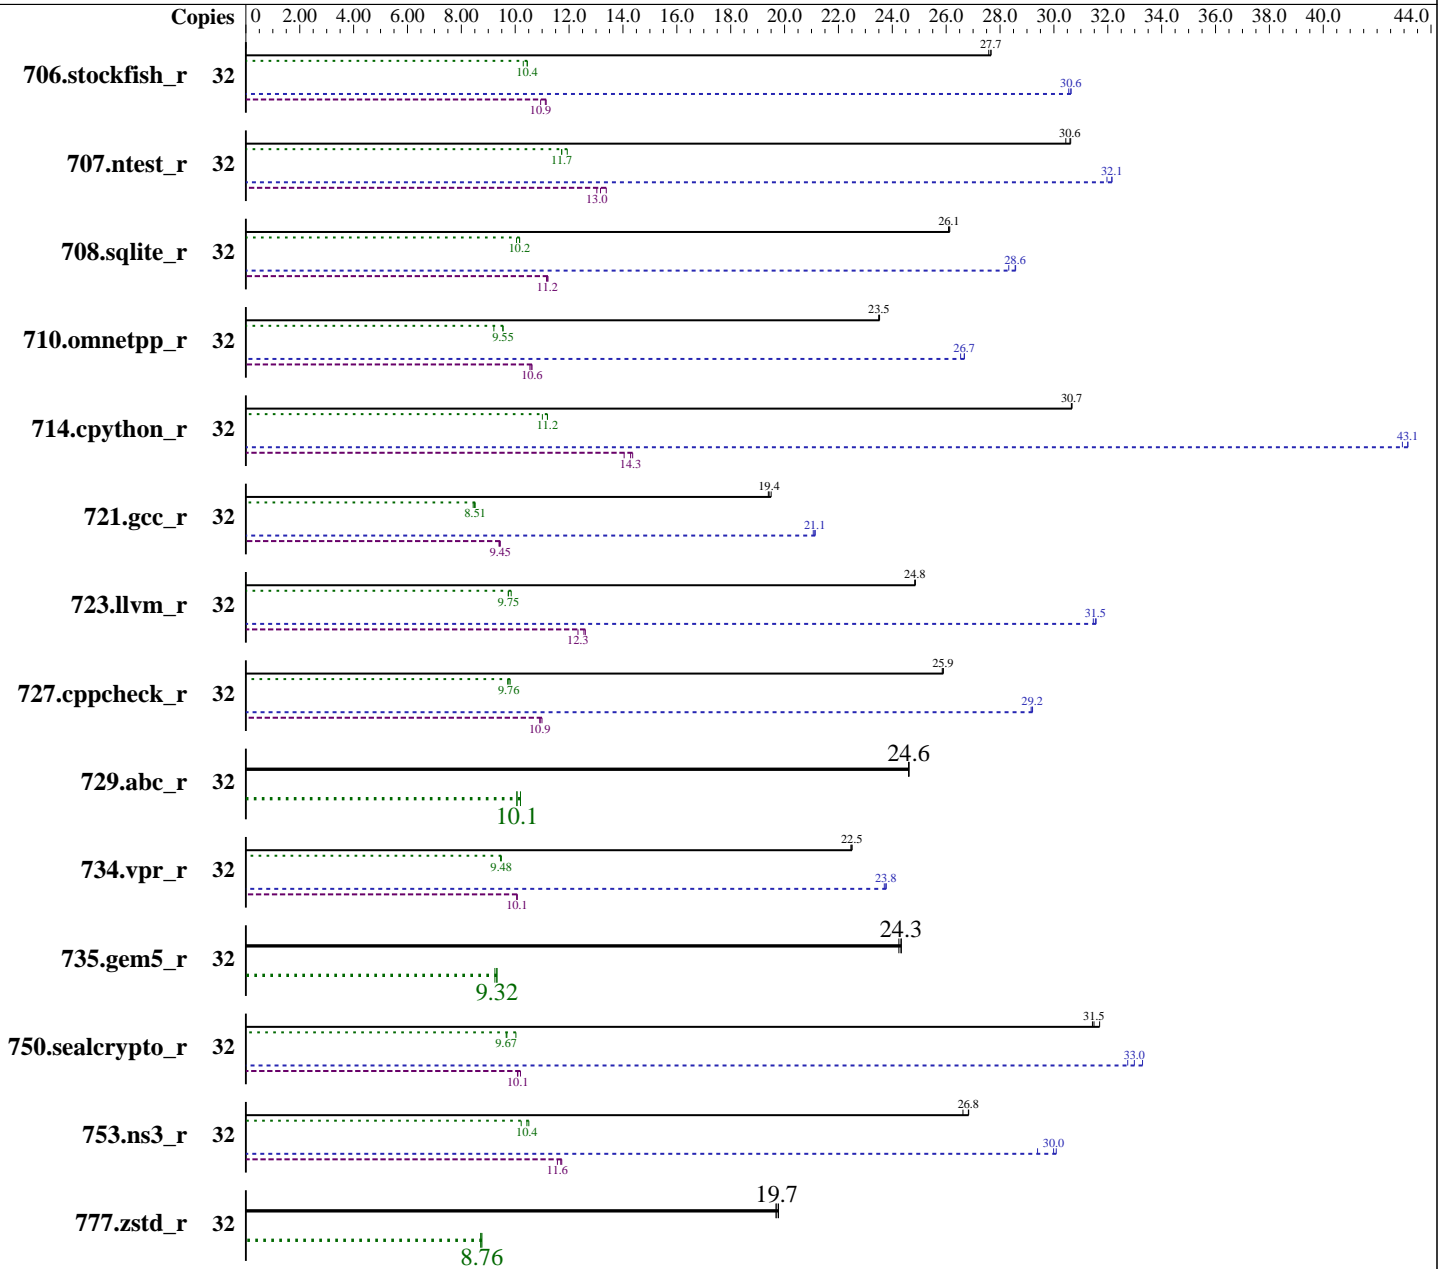



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
**(3.00 GHz Ampere eMAG 8180)**

SPECrate®2026\_int\_base = 25.3  
SPECrate®2026\_int\_energy\_base = 9.88  
SPECrate®2026\_int\_peak = 27.9  
SPECrate®2026\_int\_energy\_peak = 10.8

**CPU2026 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Apr-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

### Hardware

CPU Name: Ampere eMAG 8180  
Max MHz: 3300  
Nominal: 3000  
Enabled: 32 cores, 1 chip  
Orderable: 1 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 4 MB I+D on chip per chip (256 KB shared / 2 cores)  
L3: 32 MB I+D on chip per chip  
Other: None  
Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2666V-R)  
Storage: 1 x 480 GB SATA SSD  
Cooling: Air  
Other: None

### Software

OS: Ubuntu 24.04.1 LTS kernel 6.8.0 (64KB pages)  
Compiler: C/C++/Fortran: Version 15.2.0 of GCC  
Compiler Category: Community  
Firmware: Version 1.12 released Nov-2019  
File System: ext4  
System State: Run level 5 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc v5.3+, commit hash 1972241  
Power Management: OS CPU governor set to "performance"

### Power

Max. Power (W): 301.01  
Idle Power (W): 78.33  
Min. Temperature (C): 22.00  
Elevation (m): 60  
Line Standard: 120 V / 60 Hz / 1 phase / 2 wire  
Provisioning: Line powered

### Power Settings

Management FW: Version 11.05.111 of Falcon BMC  
Memory Mode: Normal

### Power-Relevant Hardware

Power Supply: 1 x 550 W (non-redundant)  
Details: Lenovo 03LD785 550 Watt High Efficiency Platinum AC Power Supply  
Backplane: N/A  
Other Storage: N/A  
Storage Model #: 1 x Lenovo 01PE965 (480GB SATA SSD) connected to on-board HBA  
NICs Installed: 1 x Lenovo 01PE857 @ 10 GbE (2 ports ethernet)  
NICs Enabled (FW/OS): 2 / 1  
NICs Connected/Speed: 1 @ 1 Gbps  
Other HW Model #: --

### Power Analyzer

Power Analyzer: cpu-reference-ptd:8000  
Hardware Vendor: Yokogawa  
Model: WT-310  
Serial Number: T11733285  
Input Connection: Serial over USB  
Metrology Institute: NIST  
Calibration By: Yokogawa USA  
Calibration Label: T126622  
Calibration Date: 13-Aug-2025  
PTDaemon® Version: 1.11.3 (0c074d7d; 2025-10-15)  
Setup Description: Directly connected

(Continued on next page)

### Temperature Meter

Temperature Meter: cpu-reference-ptd:9000  
Hardware Vendor: PCSensor  
Model: USB9097+DS18B20  
Serial Number: --  
Input Connection: USB  
PTDaemon Version: 1.11.3 (0c074d7d; 2025-10-15)  
Setup Description: In front of SUT front panel primary air inlet



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

### ThinkSystem HR330A (3.00 GHz Ampere eMAG 8180)

SPECrate®2026\_int\_base = 25.3

SPECrate®2026\_int\_energy\_base = 9.88

SPECrate®2026\_int\_peak = 27.9

SPECrate®2026\_int\_energy\_peak = 10.8

CPU2026 License: 6412

Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Apr-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

### Power Analyzer (Continued)

Current Ranges Used: 2A

Voltage Range Used: 150V

## Base Results Table

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
706.stockfish_r	32	1462	27.6	332	10.3	227	245	1457	27.7	328	10.4	225	241	<b>1458</b>	<b>27.7</b>	<b>328</b>	<b>10.4</b>	<b>225</b>	<b>236</b>
707.ntest_r	32	619	30.6	133	11.9	215	267	622	30.4	135	11.7	218	265	<b>619</b>	<b>30.6</b>	<b>135</b>	<b>11.7</b>	<b>219</b>	<b>265</b>
708.sqlite_r	32	648	26.1	139	10.2	215	293	647	26.1	141	10.0	218	292	<b>647</b>	<b>26.1</b>	<b>140</b>	<b>10.2</b>	<b>216</b>	<b>290</b>
710.omnetpp_r	32	661	23.5	137	9.54	208	271	<b>662</b>	<b>23.5</b>	<b>137</b>	<b>9.55</b>	<b>207</b>	<b>271</b>	662	23.5	142	9.21	215	274
714.cpython_r	32	<b>500</b>	<b>30.7</b>	<b>114</b>	<b>11.2</b>	<b>229</b>	<b>290</b>	500	30.7	114	11.2	229	290	500	30.6	116	11.0	233	288
721.gcc_r	32	<b>1130</b>	<b>19.4</b>	<b>217</b>	<b>8.51</b>	<b>192</b>	<b>279</b>	1132	19.4	219	8.44	194	276	1126	19.5	218	8.49	194	275
723.llvm_r	32	<b>653</b>	<b>24.8</b>	<b>140</b>	<b>9.75</b>	<b>214</b>	<b>279</b>	653	24.9	138	9.85	212	279	653	24.8	140	9.74	214	279
727.cppcheck_r	32	444	25.9	98.3	9.81	222	283	<b>444</b>	<b>25.9</b>	<b>98.8</b>	<b>9.76</b>	<b>223</b>	<b>284</b>	444	25.9	99.3	9.72	223	282
729.abc_r	32	597	24.6	121	10.2	202	262	597	24.6	122	10.1	205	273	<b>597</b>	<b>24.6</b>	<b>122</b>	<b>10.1</b>	<b>205</b>	<b>270</b>
734.vpr_r	32	<b>656</b>	<b>22.5</b>	<b>130</b>	<b>9.48</b>	<b>199</b>	<b>288</b>	657	22.5	130	9.48	198	284	656	22.5	131	9.45	199	283
735.gem5_r	32	640	24.3	140	9.32	219	271	<b>641</b>	<b>24.3</b>	<b>140</b>	<b>9.32</b>	<b>218</b>	<b>269</b>	643	24.2	141	9.25	219	269
750.sealcrypto_r	32	541	31.7	144	10.0	267	290	<b>545</b>	<b>31.5</b>	<b>150</b>	<b>9.67</b>	<b>275</b>	<b>291</b>	546	31.4	149	9.69	274	290
753.ns3_r	32	737	26.6	157	10.5	213	271	<b>731</b>	<b>26.8</b>	<b>158</b>	<b>10.4</b>	<b>216</b>	<b>275</b>	731	26.8	161	10.2	221	276
777.zstd_r	32	<b>1045</b>	<b>19.7</b>	<b>197</b>	<b>8.76</b>	<b>189</b>	<b>240</b>	1047	19.7	198	8.72	189	252	1042	19.8	198	8.72	190	259

SPECrate®2026\_int\_base = 25.3

SPECrate®2026\_int\_energy\_base = 9.88

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Peak Results Table

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
706.stockfish_r	32	1316	30.6	308	11.1	234	289	1320	30.6	307	11.1	233	248	<b>1316</b>	<b>30.6</b>	<b>313</b>	<b>10.9</b>	<b>238</b>	<b>252</b>
707.ntest_r	32	<b>589</b>	<b>32.1</b>	<b>122</b>	<b>13.0</b>	<b>207</b>	<b>254</b>	593	32.0	119	13.4	200	223	589	32.2	121	13.2	205	253
708.sqlite_r	32	591	28.6	126	11.2	214	292	597	28.3	127	11.2	213	293	<b>592</b>	<b>28.6</b>	<b>127</b>	<b>11.2</b>	<b>214</b>	<b>291</b>
710.omnetpp_r	32	583	26.7	124	10.6	212	284	586	26.5	124	10.5	212	282	<b>583</b>	<b>26.7</b>	<b>123</b>	<b>10.6</b>	<b>211</b>	<b>282</b>
714.cpython_r	32	357	42.9	91.2	14.0	256	300	355	43.1	89.2	14.4	251	295	<b>355</b>	<b>43.1</b>	<b>89.7</b>	<b>14.3</b>	<b>252</b>	<b>301</b>
721.gcc_r	32	1039	21.1	197	9.42	189	276	<b>1039</b>	<b>21.1</b>	<b>196</b>	<b>9.45</b>	<b>188</b>	<b>273</b>	1042	21.1	197	9.40	189	274
723.llvm_r	32	<b>514</b>	<b>31.5</b>	<b>110</b>	<b>12.3</b>	<b>215</b>	<b>277</b>	514	31.6	108	12.6	211	270	516	31.5	108	12.6	209	276
727.cppcheck_r	32	<b>393</b>	<b>29.2</b>	<b>88.4</b>	<b>10.9</b>	<b>225</b>	<b>287</b>	394	29.2	87.8	11.0	223	285	393	29.2	88.3	10.9	225	286
729.abc_r	32	597	24.6	121	10.2	202	262	597	24.6	122	10.1	205	273	<b>597</b>	<b>24.6</b>	<b>122</b>	<b>10.1</b>	<b>205</b>	<b>270</b>
734.vpr_r	32	<b>621</b>	<b>23.8</b>	<b>123</b>	<b>10.1</b>	<b>198</b>	<b>286</b>	620	23.8	123	10.1	198	283	622	23.7	123	10.1	197	282
735.gem5_r	32	640	24.3	140	9.32	219	271	<b>641</b>	<b>24.3</b>	<b>140</b>	<b>9.32</b>	<b>218</b>	<b>269</b>	643	24.2	141	9.25	219	269
750.sealcrypto_r	32	524	32.7	144	10.1	274	289	<b>520</b>	<b>33.0</b>	<b>143</b>	<b>10.1</b>	<b>276</b>	<b>289</b>	515	33.3	142	10.2	276	289
753.ns3_r	32	652	30.1	141	11.7	216	272	<b>654</b>	<b>30.0</b>	<b>142</b>	<b>11.6</b>	<b>218</b>	<b>269</b>	667	29.4	141	11.7	211	270
777.zstd_r	32	<b>1045</b>	<b>19.7</b>	<b>197</b>	<b>8.76</b>	<b>189</b>	<b>240</b>	1047	19.7	198	8.72	189	252	1042	19.8	198	8.72	190	259

SPECrate®2026\_int\_peak = 27.9

SPECrate®2026\_int\_energy\_peak = 10.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

### ThinkSystem HR330A

### (3.00 GHz Ampere eMAG 8180)

SPECrate®2026\_int\_base = 25.3

SPECrate®2026\_int\_energy\_base = 9.88

SPECrate®2026\_int\_peak = 27.9

SPECrate®2026\_int\_energy\_peak = 10.8

CPU2026 License: 6412

Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Apr-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/usr/lib64:/usr/lib:/lib64:/home/mjm/jemalloc/lib"

## General Notes

jemalloc is a general purpose malloc(3) implementation that emphasizes fragmentation avoidance and scalable concurrency support. sources available from <https://github.com/jemalloc/jemalloc/tree/1972241> and built via `./configure --with-lg-quantum=3` which used system gcc-14 -O3

This benchmark result is intended to provide perspective on past power and/or performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

## Platform Notes

Sysinfo program /home/mjm/RC2/bin/sysinfo  
Rev: 779ab21020787073335a329f3a45e2cd  
running on emag Thu Apr 9 13:14:49 2026

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. `uname -srvm`
2. `w`
3. Username
4. `ulimit -a`
5. `sysinfo process ancestry`

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

### ThinkSystem HR330A

### (3.00 GHz Ampere eMAG 8180)

SPECrate®2026\_int\_base = 25.3

SPECrate®2026\_int\_energy\_base = 9.88

SPECrate®2026\_int\_peak = 27.9

SPECrate®2026\_int\_energy\_peak = 10.8

CPU2026 License: 6412

Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Apr-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

## Platform Notes (Continued)

- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 255 (255.4-lubuntu8.14)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. sysctl
- 15. /sys/kernel/mm/transparent\_hugepage
- 16. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 17. OS release
- 18. Disk information
- 19. /sys/devices/virtual/dmi/id
- 20. dmidecode
- 21. BIOS

```
-----
1. uname -srvm
   Linux 6.8.0 #1 SMP PREEMPT_DYNAMIC Fri Feb 28 00:25:30 UTC 2025 aarch64
```

```
-----
2. w
   13:14:49 up 21 days, 21:45,  1 user,  load average: 3.07, 2.03, 2.00
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
```

```
-----
3. Username
   From environment variable $USER:  mjm
```

```
-----
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 16691648
process            128681
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
```

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
**(3.00 GHz Ampere eMAG 8180)**

SPECrate®2026\_int\_base = 25.3  
SPECrate®2026\_int\_energy\_base = 9.88  
SPECrate®2026\_int\_peak = 27.9  
SPECrate®2026\_int\_energy\_peak = 10.8

**CPU2026 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Apr-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## Platform Notes (Continued)

```

-----
5. sysinfo process ancestry
   /usr/lib/systemd/systemd --system --deserialize=73
   SCREEN
   -bin/tcsh
   runcpu --flagsurl=$SPEC/config/flags/gcc.xml -c emag-golden --reportable -n 3 --tune=base,peak --power -C 32
   intrate
   runcpu --flagsurl $SPEC/config/flags/gcc.xml --configfile emag-golden --reportable --iterations 3 --tune
   base,peak --power --copies 32 --runmode rate --tune base:peak --size refrate intrate --nopreenv
   --note-preenv --logfile $SPEC/tmp/CPU2026.098/templogs/preenv.intrate.098.0.log --lognum 098.0
   --from_runcpu 2
   specperl $SPEC/bin/sysinfo -f
   $SPEC = /home/mjm/RC2

```

```

-----
6. /proc/cpuinfo
   CPU implementer : 0x50
   CPU architecture: 8
   CPU variant     : 0x3
   CPU part       : 0x000
   CPU revision   : 2
   Features       : fp asimd evtstrm aes pmull sha1 sha2 crc32 cpuid

```

```

-----
7. lscpu

From lscpu from util-linux 2.39.3:
Architecture:                aarch64
CPU op-mode(s):              32-bit, 64-bit
Byte Order:                   Little Endian
CPU(s):                       32
On-line CPU(s) list:         0-31
Vendor ID:                    APM
Model name:                   -
Model:                        2
Thread(s) per core:          1
Core(s) per socket:          32
Socket(s):                    1
Stepping:                     0x3
Frequency boost:              disabled
CPU(s) scaling MHz:          100%
CPU max MHz:                  2911.7639
CPU min MHz:                  363.9700
BogoMIPS:                     80.00

```

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

### ThinkSystem HR330A

### (3.00 GHz Ampere eMAG 8180)

SPECrate®2026\_int\_base = 25.3

SPECrate®2026\_int\_energy\_base = 9.88

SPECrate®2026\_int\_peak = 27.9

SPECrate®2026\_int\_energy\_peak = 10.8

CPU2026 License: 6412

Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Apr-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

## Platform Notes (Continued)

```

Flags: fp asimd evtstrm aes pmull sha1 sha2 crc32 cpuid
L1d cache: 1 MiB (32 instances)
L1i cache: 1 MiB (32 instances)
L2 cache: 4 MiB (16 instances)
NUMA node(s): 1
NUMA node0 CPU(s): 0-31
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Mitigation; PTI
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Vulnerable
Vulnerability Spectre v1: Mitigation; __user pointer sanitization
Vulnerability Spectre v2: Vulnerable
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1			
L1i	32K	1M	8	Instruction	1			
L2	256K	4M	32	Unified	2			

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0-31
node 0 size: 130403 MB
node 0 free: 48756 MB
node distances:
node 0
0: 10

```

9. /proc/meminfo

MemTotal: 133533376 kB

10. who -r

run-level 5 Mar 18 15:29

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

### ThinkSystem HR330A

### (3.00 GHz Ampere eMAG 8180)

SPECrate®2026\_int\_base = 25.3

SPECrate®2026\_int\_energy\_base = 9.88

SPECrate®2026\_int\_peak = 27.9

SPECrate®2026\_int\_energy\_peak = 10.8

CPU2026 License: 6412

Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Apr-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

## Platform Notes (Continued)

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.14)

Default Target	Status
graphical	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate power-profiles-daemon rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell ipmievd iscsid nftables rsync ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysextd systemd-time-wait-sync
generated	openipmi perlbald
indirect	serial-getty@ systemd-sysupdate systemd-sysupdate-reboot uidd
masked	cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.8.0
root=UUID=16268541-06d0-4374-97ca-2d512d4db26f
ro
cma=1024M
iommu.passthrough=1
```

14. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

### ThinkSystem HR330A

### (3.00 GHz Ampere eMAG 8180)

SPECrate®2026\_int\_base = 25.3

SPECrate®2026\_int\_energy\_base = 9.88

SPECrate®2026\_int\_peak = 27.9

SPECrate®2026\_int\_energy\_peak = 10.8

CPU2026 License: 6412

Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Apr-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

## Platform Notes (Continued)

```

vm.extfrag_threshold          500
vm.min_unmapped_ratio        1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages   0
vm.swappiness                 60
vm.watermark_boost_factor    15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode         0

```

```

-----
15. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvise [madvise] never
enabled         always [madvise] never
hpage_pmd_size 536870912
shmem_enabled   always within_size advise [never] deny force

```

```

-----
16. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none          8191
max_ptes_shared        4096
max_ptes_swap          1024
pages_to_scan          65536
scan_sleep_millisecs  10000

```

```

-----
17. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.1 LTS

```

```

-----
18. Disk information
SPEC is set to: /home/mjm/RC2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  439G  304G  113G   74% /

```

```

-----
19. /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         HR330A          7X33CT01WW
Product Family: Lenovo ThinkSystem HR330A/HR350A

```

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
**(3.00 GHz Ampere eMAG 8180)**

SPECrate®2026\_int\_base = 25.3  
SPECrate®2026\_int\_energy\_base = 9.88  
SPECrate®2026\_int\_peak = 27.9  
SPECrate®2026\_int\_energy\_peak = 10.8

**CPU2026 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Apr-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## Platform Notes (Continued)

### 20. dmidecode

Additional information from dmidecode 3.5 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

8x Samsung M393A2K43CB2-CTD 16 GB 2 rank 2667

### 21. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: LENOVO  
BIOS Version: HVE104N-1.12  
BIOS Date: 11/29/2019  
BIOS Revision: 1.12  
Firmware Revision: 1.7

## Power Settings Notes

OS CPU governor was set using the command:  
echo performance | tee /sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor

## Compiler Version Notes

```
=====  
C      | 708.sqlite_r(base, peak) 714.cpython_r(base, peak) 777.zstd_r(base,  
      | peak)  
-----
```

gcc (GCC) 15.2.0

Copyright (C) 2025 Free Software Foundation, Inc.

This is free software; see the source for copying conditions. There is NO warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

```
=====  
C++   | 706.stockfish_r(base, peak) 707.ntest_r(base, peak)  
      | 727.cppcheck_r(base, peak) 753.ns3_r(base, peak)  
-----
```

g++ (GCC) 15.2.0

Copyright (C) 2025 Free Software Foundation, Inc.

This is free software; see the source for copying conditions. There is NO warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

### ThinkSystem HR330A

### (3.00 GHz Ampere eMAG 8180)

SPECrate®2026\_int\_base = 25.3

SPECrate®2026\_int\_energy\_base = 9.88

SPECrate®2026\_int\_peak = 27.9

SPECrate®2026\_int\_energy\_peak = 10.8

CPU2026 License: 6412

Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Apr-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

## Compiler Version Notes (Continued)

```

=====
C++, C | 710.omnetpp_r(base pass 0, peak pass 1, peak pass 2) 721.gcc_r(base
      | pass 0, peak pass 1, peak pass 2) 723.llvm_r(base pass 0, peak pass
      | 1, peak pass 2) 729.abc_r(base pass 0, peak pass 0) 734.vpr_r(base
      | pass 0, peak pass 1, peak pass 2) 735.gem5_r(base pass 0, peak pass
      | 0) 750.sealcrypto_r(base pass 0, peak pass 1, peak pass 2)
=====

```

g++ (GCC) 15.2.0

Copyright (C) 2025 Free Software Foundation, Inc.

This is free software; see the source for copying conditions. There is NO warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

```

=====
C++, C | 710.omnetpp_r(base pass 0, peak pass 1, peak pass 2) 721.gcc_r(base
      | pass 0, peak pass 1, peak pass 2) 723.llvm_r(base pass 0, peak pass
      | 1, peak pass 2) 729.abc_r(base pass 0, peak pass 0) 734.vpr_r(base
      | pass 0, peak pass 1, peak pass 2) 735.gem5_r(base pass 0, peak pass
      | 0) 750.sealcrypto_r(base pass 0, peak pass 1, peak pass 2)
=====

```

gcc (GCC) 15.2.0

Copyright (C) 2025 Free Software Foundation, Inc.

This is free software; see the source for copying conditions. There is NO warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

```

=====
C++, C | 710.omnetpp_r(base pass 0, peak pass 1, peak pass 2) 721.gcc_r(base
      | pass 0, peak pass 1, peak pass 2) 723.llvm_r(base pass 0, peak pass
      | 1, peak pass 2) 729.abc_r(base pass 0, peak pass 0) 734.vpr_r(base
      | pass 0, peak pass 1, peak pass 2) 735.gem5_r(base pass 0, peak pass
      | 0) 750.sealcrypto_r(base pass 0, peak pass 1, peak pass 2)
=====

```

g++ (GCC) 15.2.0

Copyright (C) 2025 Free Software Foundation, Inc.

This is free software; see the source for copying conditions. There is NO warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

```

=====
C++, C | 710.omnetpp_r(base pass 0, peak pass 1, peak pass 2) 721.gcc_r(base
      | pass 0, peak pass 1, peak pass 2) 723.llvm_r(base pass 0, peak pass
      | 1, peak pass 2) 729.abc_r(base pass 0, peak pass 0) 734.vpr_r(base
      | pass 0, peak pass 1, peak pass 2) 735.gem5_r(base pass 0, peak pass
      | 0) 750.sealcrypto_r(base pass 0, peak pass 1, peak pass 2)
=====

```

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

### ThinkSystem HR330A

### (3.00 GHz Ampere eMAG 8180)

SPECrate®2026\_int\_base = 25.3

SPECrate®2026\_int\_energy\_base = 9.88

SPECrate®2026\_int\_peak = 27.9

SPECrate®2026\_int\_energy\_peak = 10.8

CPU2026 License: 6412

Test Sponsor: Ampere Computing, Inc.

Tested by: Ampere Computing, Inc.

Test Date: Apr-2026

Hardware Availability: Apr-2019

Software Availability: Aug-2025

## Compiler Version Notes (Continued)

```
| pass 0, peak pass 1, peak pass 2) 735.gem5_r(base pass 0, peak pass
| 0) 750.sealcrypto_r(base pass 0, peak pass 1, peak pass 2)
```

-----  
gcc (GCC) 15.2.0

Copyright (C) 2025 Free Software Foundation, Inc.

This is free software; see the source for copying conditions. There is NO  
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

## Base Compiler Invocation

C benchmarks:

gcc

C++ benchmarks:

g++

Benchmarks using both C and C++:

g++ gcc

## Base Portability Flags

706.stockfish\_r: -DSPEC\_LP64

707.ntest\_r: -DSPEC\_LP64

708.sqlite\_r: -DSPEC\_LP64

710.omnetpp\_r: -fno-finite-math-only -DSPEC\_LP64

714.cpython\_r: -DSPEC\_LP64

721.gcc\_r: -DSPEC\_LP64

723.llvm\_r: -DSPEC\_LP64

727.cppcheck\_r: -DSPEC\_LP64

729.abc\_r: -DSPEC\_LP64

734.vpr\_r: -fno-finite-math-only -DSPEC\_LP64

735.gem5\_r: -fno-finite-math-only -DSPEC\_LP64

750.sealcrypto\_r: -DSPEC\_LP64

753.ns3\_r: -DSPEC\_LP64

777.zstd\_r: -DSPEC\_LP64



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

## ThinkSystem HR330A

## (3.00 GHz Ampere eMAG 8180)

SPECrate®2026\_int\_base = 25.3

SPECrate®2026\_int\_energy\_base = 9.88

SPECrate®2026\_int\_peak = 27.9

SPECrate®2026\_int\_energy\_peak = 10.8

**CPU2026 License:** 6412

**Test Sponsor:** Ampere Computing, Inc.

**Tested by:** Ampere Computing, Inc.

**Test Date:** Apr-2026

**Hardware Availability:** Apr-2019

**Software Availability:** Aug-2025

## Base Optimization Flags

C benchmarks:

```
-mabi=lp64 -std=c18 -g -O3 -ffast-math -mcpu=native -flto=16
-L/home/mjm/jemalloc/lib -ljemalloc
```

C++ benchmarks:

```
706.stockfish_r: -mabi=lp64 -std=c++17 -g -O3 -ffast-math -mcpu=native
-flto=16 -pthread -L/home/mjm/jemalloc/lib -ljemalloc
```

```
707.ntest_r: -mabi=lp64 -std=c++17 -g -O3 -ffast-math -mcpu=native
-flto=16 -L/home/mjm/jemalloc/lib -ljemalloc
```

727.cppcheck\_r: Same as 707.ntest\_r

753.ns3\_r: Same as 707.ntest\_r

Benchmarks using both C and C++:

```
710.omnetpp_r: -mabi=lp64 -std=c++17 -std=c18 -g -O3 -ffast-math
-mcpu=native -flto=16 -L/home/mjm/jemalloc/lib
-ljemalloc
```

721.gcc\_r: Same as 710.omnetpp\_r

```
723.llvm_r: -mabi=lp64 -std=c++17 -std=c18 -g -O3 -ffast-math
-mcpu=native -flto=16 -pthread -L/home/mjm/jemalloc/lib
-ljemalloc
```

729.abc\_r: Same as 710.omnetpp\_r

734.vpr\_r: Same as 710.omnetpp\_r

735.gem5\_r: Same as 723.llvm\_r

750.sealcrypto\_r: Same as 710.omnetpp\_r

## Peak Compiler Invocation

C benchmarks:

```
gcc
```

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

## ThinkSystem HR330A

## (3.00 GHz Ampere eMAG 8180)

SPECrate®2026\_int\_base = 25.3

SPECrate®2026\_int\_energy\_base = 9.88

SPECrate®2026\_int\_peak = 27.9

SPECrate®2026\_int\_energy\_peak = 10.8

**CPU2026 License:** 6412

**Test Sponsor:** Ampere Computing, Inc.

**Tested by:** Ampere Computing, Inc.

**Test Date:** Apr-2026

**Hardware Availability:** Apr-2019

**Software Availability:** Aug-2025

## Peak Compiler Invocation (Continued)

C++ benchmarks:

g++

Benchmarks using both C and C++:

g++ gcc

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

708.sqlite\_r: -mabi=lp64 -std=c18 -fprofile-generate -fprofile-use -g  
-Ofast -mcpu=native -flto=16 -L/home/mjm/jemalloc/lib  
-ljemalloc

714.cpython\_r: Same as 708.sqlite\_r

777.zstd\_r: basepeak = yes

C++ benchmarks:

706.stockfish\_r: -mabi=lp64 -std=c++17 -fprofile-generate -fprofile-use  
-g -Ofast -mcpu=native -flto=16 -pthread  
-L/home/mjm/jemalloc/lib -ljemalloc

707.ntest\_r: -mabi=lp64 -std=c++17 -fprofile-generate -fprofile-use  
-g -Ofast -mcpu=native -flto=16  
-L/home/mjm/jemalloc/lib -ljemalloc

727.cppcheck\_r: Same as 707.ntest\_r

753.ns3\_r: Same as 707.ntest\_r

Benchmarks using both C and C++:

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

(Test Sponsor: Ampere Computing, Inc.)

### ThinkSystem HR330A

### (3.00 GHz Ampere eMAG 8180)

SPECrate®2026\_int\_base = 25.3

SPECrate®2026\_int\_energy\_base = 9.88

SPECrate®2026\_int\_peak = 27.9

SPECrate®2026\_int\_energy\_peak = 10.8

**CPU2026 License:** 6412

**Test Sponsor:** Ampere Computing, Inc.

**Tested by:** Ampere Computing, Inc.

**Test Date:** Apr-2026

**Hardware Availability:** Apr-2019

**Software Availability:** Aug-2025

## Peak Optimization Flags (Continued)

710.omnetpp\_r: -mabi=lp64 -std=c++17 -std=c18 -fprofile-generate  
-fprofile-use -g -Ofast -mcpu=native -fltto=16  
-L/home/mjm/jemalloc/lib -ljemalloc

721.gcc\_r: Same as 710.omnetpp\_r

723.llvm\_r: -mabi=lp64 -std=c++17 -std=c18 -fprofile-generate  
-fprofile-use -g -Ofast -mcpu=native -fltto=16 -pthread  
-L/home/mjm/jemalloc/lib -ljemalloc

729.abc\_r: basepeak = yes

734.vpr\_r: Same as 710.omnetpp\_r

735.gem5\_r: basepeak = yes

750.sealcrypto\_r: Same as 710.omnetpp\_r

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/gcc-rev-A2.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2026/results/flags/gcc-rev-A2.xml>

PTDaemon, SPEC CPU, and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2026 v0.903.0 on 2026-04-09 09:14:47-0400.

Report generated on 2026-05-04 23:26:38 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.