



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8  
(AMD EPYC 9575F 3.30 GHz Processor)

SPECrate®2026\_fp\_base = 668

SPECrate®2026\_fp\_peak = 668

CPU2026 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2026

Hardware Availability: Feb-2025

Software Availability: Jan-2026

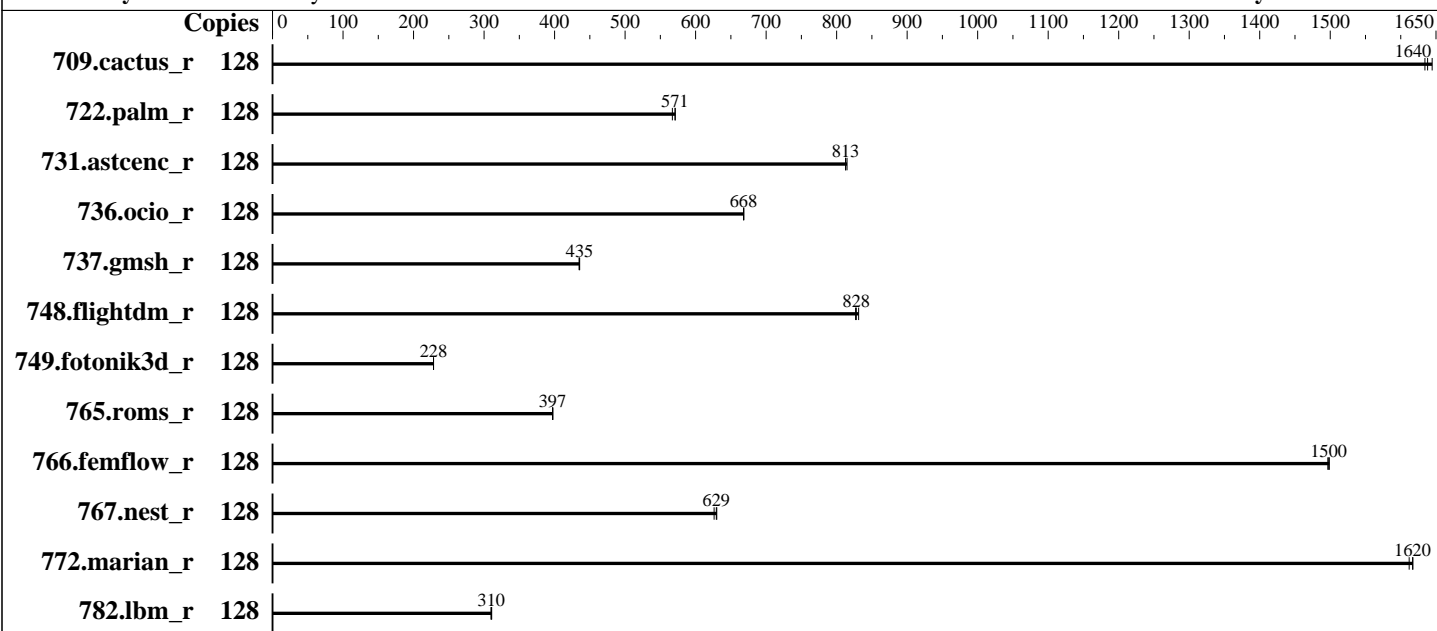

### Hardware

CPU Name: AMD EPYC 9575F  
 Max MHz: 5000  
 Nominal: 3300  
 Enabled: 128 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R, running at 5600)  
 Storage: 240 GB M.2 SATA SSD  
 Cooling: Air  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 kernel version 6.4.0-150600.21-default  
 Compiler: C/C++/Fortran: Version 5.1.0 of AOCC  
 Compiler Category: Vendor  
 Firmware: Version 4.3.6a released Mar-2025  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8  
(AMD EPYC 9575F 3.30 GHz Processor)

SPECrate®2026\_fp\_base = 668

SPECrate®2026\_fp\_peak = 668

**CPU2026 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2026  
**Hardware Availability:** Feb-2025  
**Software Availability:** Jan-2026

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	128	<b>67.0</b>	<b>1640</b>	67.2	1630	66.8	1640	128	<b>67.0</b>	<b>1640</b>	67.2	1630	66.8	1640
722.palm_r	128	<b>296</b>	<b>571</b>	298	567	296	571	128	<b>296</b>	<b>571</b>	298	567	296	571
731.ascenc_r	128	132	815	<b>132</b>	<b>813</b>	132	813	128	132	815	<b>132</b>	<b>813</b>	132	813
736.ocio_r	128	168	668	168	668	<b>168</b>	<b>668</b>	128	168	668	168	668	<b>168</b>	<b>668</b>
737.gmsh_r	128	135	435	135	435	<b>135</b>	<b>435</b>	128	135	435	135	435	<b>135</b>	<b>435</b>
748.flightdm_r	128	<b>111</b>	<b>828</b>	110	831	111	827	128	<b>111</b>	<b>828</b>	110	831	111	827
749.fotonik3d_r	128	648	228	648	228	<b>648</b>	<b>228</b>	128	648	228	648	228	<b>648</b>	<b>228</b>
765.roms_r	128	507	398	<b>508</b>	<b>397</b>	508	397	128	507	398	<b>508</b>	<b>397</b>	508	397
766.femflow_r	128	125	1500	<b>125</b>	<b>1500</b>	125	1500	128	125	1500	<b>125</b>	<b>1500</b>	125	1500
767.nest_r	128	162	626	161	630	<b>161</b>	<b>629</b>	128	162	626	161	630	<b>161</b>	<b>629</b>
772.marian_r	128	<b>125</b>	<b>1620</b>	125	1620	125	1610	128	<b>125</b>	<b>1620</b>	125	1620	125	1610
782.lbm_r	128	236	311	237	310	<b>236</b>	<b>310</b>	128	236	311	237	310	<b>236</b>	<b>310</b>

SPECrate®2026\_fp\_base = **668**

SPECrate®2026\_fp\_peak = **668**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8  
(AMD EPYC 9575F 3.30 GHz Processor)

SPECrate®2026\_fp\_base = 668

SPECrate®2026\_fp\_peak = 668

**CPU2026 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2026  
**Hardware Availability:** Feb-2025  
**Software Availability:** Jan-2026

### Operating System Notes (Continued)

To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.  
To enable Transparent Hugepages (THP) for all allocations, 'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and 'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/cpu2026.902/amd\_rate\_aocc510\_znver5\_A\_lib/lib:/home/cpu2026.902/a  
md\_rate\_aocc510\_znver5\_A\_lib/lib32:"  
MALLOC\_CONF = "retain:true"

### General Notes

Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB Memory using Ubuntu 24.04

### Platform Notes

BIOS Settings:  
NUMA nodes per socket set to NPS2  
Determinism Slider set to Power  
Enhanced CPU Performance set to Auto

Sysinfo program /home/cpu2026.902/bin/sysinfo  
Rev: 069f95da7e7f5d81b2ce48a82150e54f  
running on sles15sp6nvme Tue Feb 3 22:44:40 2026

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8  
(AMD EPYC 9575F 3.30 GHz Processor)

SPECrate®2026\_fp\_base = 668

SPECrate®2026\_fp\_peak = 668

CPU2026 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2026

Hardware Availability: Feb-2025

Software Availability: Jan-2026

### Platform Notes (Continued)

- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
- 12. Failed units, from systemctl list-units --state=failed
- 13. Services, from systemctl list-unit-files
- 14. Linux kernel boot-time arguments, from /proc/cmdline
- 15. cpupower frequency-info
- 16. tuned-adm active
- 17. sysctl
- 18. /sys/kernel/mm/transparent\_hugepage
- 19. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 20. OS release
- 21. Disk information
- 22. /sys/devices/virtual/dmi/id
- 23. dmidecode
- 24. BIOS

```
-----
1. uname -srvm
Linux 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09) x86_64
-----
```

```
2. w
22:44:40 up 2:53, 1 user, load average: 167.58, 231.95, 242.02
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root     tty2      -              19:52    2:52m  1.21s  0.24s  /bin/bash ./amd_rate_aocc510_znver5_A1.sh
-----
```

```
3. Username
From environment variable $USER: root
-----
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 6190375
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
-----
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8  
(AMD EPYC 9575F 3.30 GHz Processor)

SPECrate®2026\_fp\_base = 668

SPECrate®2026\_fp\_peak = 668

**CPU2026 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2026  
**Hardware Availability:** Feb-2025  
**Software Availability:** Jan-2026

### Platform Notes (Continued)

```
max user processes          (-u) 6190375
virtual memory              (kbytes, -v) unlimited
file locks                  (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
python3 ./run_amd_rate_aocc510_znver5_A1.py
/bin/bash ./amd_rate_aocc510_znver5_A1.sh
runcpu --config amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.003/templogs/preenv.fprate.003.0.log --lognum 003.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026.902
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9575F 64-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb00211e
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores     : 64
siblings      : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-63
physical id 1: core ids 0-63
physical id 0: apicids 0-127
physical id 1: apicids 128-255
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

```
From lscpu from util-linux 2.39.3:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:     52 bits physical, 57 bits virtual
Byte Order:        Little Endian
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8  
(AMD EPYC 9575F 3.30 GHz Processor)

SPECrate®2026\_fp\_base = 668

SPECrate®2026\_fp\_peak = 668

**CPU2026 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2026  
**Hardware Availability:** Feb-2025  
**Software Availability:** Jan-2026

### Platform Notes (Continued)

```

CPU(s): 256
On-line CPU(s) list: 0-255
Vendor ID: AuthenticAMD
BIOS Vendor ID: Advanced Micro Devices, Inc.
Model name: AMD EPYC 9575F 64-Core Processor
BIOS Model name: AMD EPYC 9575F 64-Core Processor Unknown CPU @ 3.3GHz
BIOS CPU family: 107
CPU family: 26
Model: 2
Thread(s) per core: 2
Core(s) per socket: 64
Socket(s): 2
Stepping: 1
Frequency boost: enabled
CPU(s) scaling MHz: 67%
CPU max MHz: 5008.0068
CPU min MHz: 1500.0000
BogoMIPS: 6590.79
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_lld debug_swap

Virtualization: AMD-V
L1d cache: 6 MiB (128 instances)
L1i cache: 4 MiB (128 instances)
L2 cache: 128 MiB (128 instances)
L3 cache: 512 MiB (16 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-15,128-143
NUMA node1 CPU(s): 16-31,144-159
NUMA node2 CPU(s): 32-47,160-175

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8  
(AMD EPYC 9575F 3.30 GHz Processor)

SPECrate®2026\_fp\_base = 668

SPECrate®2026\_fp\_peak = 668

**CPU2026 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2026  
**Hardware Availability:** Feb-2025  
**Software Availability:** Jan-2026

### Platform Notes (Continued)

```

NUMA node3 CPU(s):          48-63,176-191
NUMA node4 CPU(s):          64-79,192-207
NUMA node5 CPU(s):          80-95,208-223
NUMA node6 CPU(s):          96-111,224-239
NUMA node7 CPU(s):          112-127,240-255
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:              Not affected
Vulnerability Mds:               Not affected
Vulnerability Meltdown:          Not affected
Vulnerability Mmio stale data:    Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:          Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:  Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:         Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:         Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                   always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:              Not affected
Vulnerability Tsx async abort:    Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	16	Unified	2	1024	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-15,128-143
node 0 size: 193112 MB
node 0 free: 191851 MB
node 1 cpus: 16-31,144-159
node 1 size: 193527 MB
node 1 free: 192374 MB
node 2 cpus: 32-47,160-175
node 2 size: 193527 MB
node 2 free: 192308 MB
node 3 cpus: 48-63,176-191
node 3 size: 193527 MB
node 3 free: 192357 MB
node 4 cpus: 64-79,192-207
node 4 size: 193527 MB
node 4 free: 192354 MB

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8  
(AMD EPYC 9575F 3.30 GHz Processor)

SPECrate®2026\_fp\_base = 668

SPECrate®2026\_fp\_peak = 668

**CPU2026 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2026  
**Hardware Availability:** Feb-2025  
**Software Availability:** Jan-2026

### Platform Notes (Continued)

```

node 5 cpus: 80-95,208-223
node 5 size: 193488 MB
node 5 free: 192320 MB
node 6 cpus: 96-111,224-239
node 6 size: 193527 MB
node 6 free: 192386 MB
node 7 cpus: 112-127,240-255
node 7 size: 193391 MB
node 7 free: 192218 MB
node distances:
node   0   1   2   3   4   5   6   7
  0:  10  12  12  12  32  32  32  32
  1:  12  10  12  12  32  32  32  32
  2:  12  12  10  12  32  32  32  32
  3:  12  12  12  10  32  32  32  32
  4:  32  32  32  32  10  12  12  12
  5:  32  32  32  32  12  10  12  12
  6:  32  32  32  32  12  12  10  12
  7:  32  32  32  32  12  12  12  10

```

```

-----
9. /proc/meminfo
   MemTotal:      1584773132 kB

```

```

-----
10. who -r
    run-level 3 Feb 3 19:52 last=5

```

```

-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
    Default Target  Status
    graphical       degraded

```

```

-----
12. Failed units, from systemctl list-units --state=failed
    UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
* udisks2.service loaded failed failed Disk Manager

```

```

-----
13. Services, from systemctl list-unit-files
    STATE    UNIT FILES
enabled    YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron
           display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd
           nvme-fc-boot-connections nvme-fc-autoconnect postfix purge-kernels rollback rsyslog smartd
           sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime  systemd-remount-fs
disabled        accounts-daemon autofsd autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8  
(AMD EPYC 9575F 3.30 GHz Processor)

SPECrate®2026\_fp\_base = 668

SPECrate®2026\_fp\_peak = 668

**CPU2026 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2026  
**Hardware Availability:** Feb-2025  
**Software Availability:** Jan-2026

### Platform Notes (Continued)

```
ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables
exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb
ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysexit systemd-time-wait-sync
systemd-timesyncd tuned udisks2 update-system-flatpaks upower vncserver@
indirect systemd-userdbd wickedd
```

-----  
14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=(hd2,gpt12)/boot/vmlinuz-6.4.0-150600.21-default  
root=UUID=debl3dd2-1372-4d2b-ac60-6c702361c648  
splash=silent  
mitigations=auto  
quiet

-----  
15. cpupower frequency-info  
analyzing CPU 207:  
current policy: frequency should be within 1.50 GHz and 3.30 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes

-----  
16. tuned-adm active  
No current active profile.

-----  
17. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8  
(AMD EPYC 9575F 3.30 GHz Processor)

SPECrate®2026\_fp\_base = 668

SPECrate®2026\_fp\_peak = 668

**CPU2026 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Feb-2026

**Hardware Availability:** Feb-2025

**Software Availability:** Jan-2026

### Platform Notes (Continued)

```

vm.nr_overcommit_hugepages      0
vm.swappiness                    1
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            1

```

```

-----
18. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
20. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

```

-----
21. Disk information
SPEC is set to: /home/cpu2026.902
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p26 xfs   731G  114G  618G  16% /home

```

```

-----
22. /sys/devices/virtual/dmi/id
Vendor:          Cisco Systems Inc
Product:         UCSX-215C-M8
Product Family: Cisco UCS Rack Server
Serial:          FCH282172BL

```

```

-----
23. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8  
(AMD EPYC 9575F 3.30 GHz Processor)

SPECrate®2026\_fp\_base = 668

SPECrate®2026\_fp\_peak = 668

**CPU2026 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2026  
**Hardware Availability:** Feb-2025  
**Software Availability:** Jan-2026

### Platform Notes (Continued)

Memory:  
24x 0xAD00 HMC94AGBRA181N 64 GB 2 rank 5600

#### 24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Cisco Systems, Inc.  
BIOS Version: X215M8.4.3.6a.0.0317251004  
BIOS Date: 03/17/2025  
BIOS Revision: 5.35

### Compiler Version Notes

=====  
C | 782.lbm\_r(base)  
-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin  
-----

=====  
C++ | 731.astcenc\_r(base) 736.ocio\_r(base) 748.flightdm\_r(base)  
766.femflow\_r(base) 767.nest\_r(base) 772.marian\_r(base)

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin  
-----

=====  
C++, C | 709.cactus\_r(base) 737.gmsh\_r(base)  
-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin  
-----

=====  
Fortran | 722.palm\_r(base) 749.fotonik3d\_r(base) 765.roms\_r(base)  
-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8  
(AMD EPYC 9575F 3.30 GHz Processor)

SPECrate®2026\_fp\_base = 668

SPECrate®2026\_fp\_peak = 668

**CPU2026 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2026  
**Hardware Availability:** Feb-2025  
**Software Availability:** Jan-2026

### Compiler Version Notes (Continued)

Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin  
-----

### Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

Benchmarks using both C and C++:  
clang++ clang

### Base Portability Flags

709.cactus\_r: -DSPEC\_LP64  
722.palm\_r: -DSPEC\_LP64  
731.ascenc\_r: -DSPEC\_LP64  
736.ocio\_r: -fno-finite-math-only -DSPEC\_LP64  
737.gmsh\_r: -fno-fast-math -DSPEC\_LP64  
748.flightdm\_r: -fno-reciprocal-math -DSPEC\_LP64  
749.fotonik3d\_r: -DSPEC\_LP64  
765.roms\_r: -DSPEC\_LP64  
766.femflow\_r: -DSPEC\_LP64  
767.nest\_r: -fno-finite-math-only -DSPEC\_LP64  
772.marian\_r: -DSPEC\_LP64  
782.lbm\_r: -DSPEC\_LP64

### Base Optimization Flags

C benchmarks:  
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather  
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8  
(AMD EPYC 9575F 3.30 GHz Processor)

SPECrate®2026\_fp\_base = 668

SPECrate®2026\_fp\_peak = 668

**CPU2026 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2026  
**Hardware Availability:** Feb-2025  
**Software Availability:** Jan-2026

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

C++ benchmarks:

```
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -Mstandard -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -ffast-math -O3
-march=znver5 -fveclib=AMDLIBM -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

## Peak Optimization Flags

C benchmarks:

782.lbm\_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8  
(AMD EPYC 9575F 3.30 GHz Processor)

SPECrate®2026\_fp\_base = 668

SPECrate®2026\_fp\_peak = 668

**CPU2026 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2026  
**Hardware Availability:** Feb-2025  
**Software Availability:** Jan-2026

## Peak Optimization Flags (Continued)

731.astcenc\_r: basepeak = yes

736.ocio\_r: basepeak = yes

748.flightdm\_r: basepeak = yes

766.femflow\_r: basepeak = yes

767.nest\_r: basepeak = yes

772.marian\_r: basepeak = yes

Fortran benchmarks:

722.palm\_r: basepeak = yes

749.fotonik3d\_r: basepeak = yes

765.roms\_r: basepeak = yes

Benchmarks using both C and C++:

709.cactus\_r: basepeak = yes

737.gmsh\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.00.html>

<http://www.spec.org/cpu2026/results/flags/Cisco-Platform-Settings-AMD-Turin-v1.1-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.00.xml>

<http://www.spec.org/cpu2026/results/flags/Cisco-Platform-Settings-AMD-Turin-v1.1-revG.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-04 01:44:40-0500.  
Report generated on 2026-05-11 16:35:38 by CPU2026 PDF formatter (unknown).  
Originally published on 2026-05-05.