



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2026\_fp\_base = 991

PowerEdge M7725 (AMD EPYC 9755 128-Core Processor)

SPECrate®2026\_fp\_peak = 991

CPU2026 License: 6573


Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Jan-2025

Tested by: Dell Inc.

Software Availability: Jan-2026

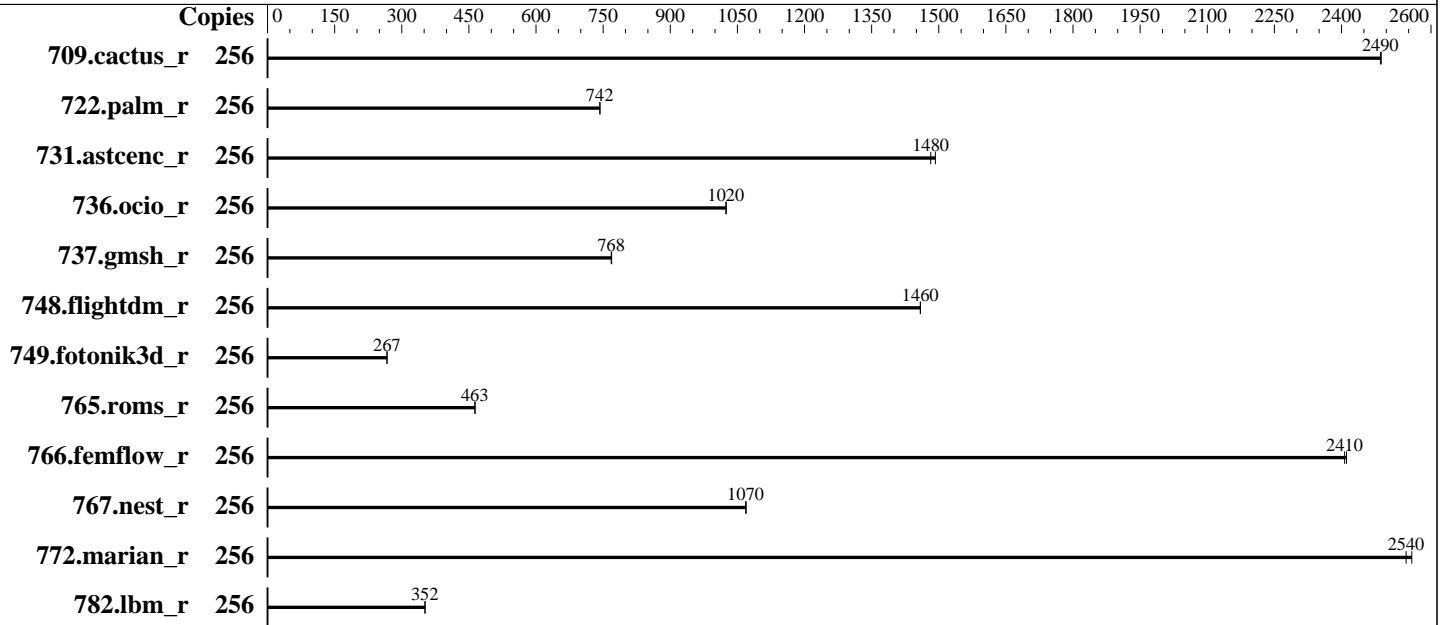

### Hardware

CPU Name: AMD EPYC 9755  
 Max MHz: 4100  
 Nominal: 2700  
 Enabled: 256 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 512 MB I+D on chip per chip, 32 MB shared / 8 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)  
 Storage: 150 GB on tmpfs  
 Cooling: DLC  
 Other: None

### Software

OS: Ubuntu 24.04.1 LTS  
 6.8.0-57-generic  
 Compiler: C/C++/Fortran: Version 5.1.0 of AOCC  
 Compiler Category: Vendor  
 Firmware: Version 1.5.3 released Oct-2025  
 File System: tmpfs  
 System State: Run level 5 (graphical multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2026\_fp\_base = 991

PowerEdge M7725 (AMD EPYC 9755 128-Core Processor)

SPECrate®2026\_fp\_peak = 991

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Jan-2025  
Software Availability: Jan-2026

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	256	<b>88.3</b>	<b>2490</b>	88.3	2490			256	<b>88.3</b>	<b>2490</b>	88.3	2490		
722.palm_r	256	<b>455</b>	<b>742</b>	455	743			256	<b>455</b>	<b>742</b>	455	743		
731.ascenc_r	256	144	1490	<b>145</b>	<b>1480</b>			256	144	1490	<b>145</b>	<b>1480</b>		
736.ocio_r	256	<b>219</b>	<b>1020</b>	219	1030			256	<b>219</b>	<b>1020</b>	219	1030		
737.gmsh_r	256	<b>153</b>	<b>768</b>	153	769			256	<b>153</b>	<b>768</b>	153	769		
748.flightdm_r	256	126	1460	<b>126</b>	<b>1460</b>			256	126	1460	<b>126</b>	<b>1460</b>		
749.fotonik3d_r	256	1108	267	<b>1108</b>	<b>267</b>			256	1108	267	<b>1108</b>	<b>267</b>		
765.roms_r	256	869	464	<b>870</b>	<b>463</b>			256	869	464	<b>870</b>	<b>463</b>		
766.femflow_r	256	<b>156</b>	<b>2410</b>	156	2410			256	<b>156</b>	<b>2410</b>	156	2410		
767.nest_r	256	<b>190</b>	<b>1070</b>	190	1070			256	<b>190</b>	<b>1070</b>	190	1070		
772.marian_r	256	<b>159</b>	<b>2540</b>	158	2560			256	<b>159</b>	<b>2540</b>	158	2560		
782.lbm_r	256	<b>417</b>	<b>352</b>	416	352			256	<b>417</b>	<b>352</b>	416	352		

SPECrate®2026\_fp\_base = **991**

SPECrate®2026\_fp\_peak = **991**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 991

PowerEdge M7725 (AMD EPYC 9755 128-Core Processor)

SPECrate®2026\_fp\_peak = 991

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Jan-2025  
Software Availability: Jan-2026

## Operating System Notes (Continued)

To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.  
To enable Transparent Hugepages (THP) for all allocations, 'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and 'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/mnt/ramdisk/cpu2026rc2/amd\_rate\_aocc510\_znver5\_A\_lib/lib:/mnt/ramdisk/cpu2026rc2/amd\_rate\_aocc510\_znver5\_A\_lib/lib32:"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB Memory using Ubuntu 24.04  
Benchmark run from a 150 GB ramdisk created with the cmd: "mount -t tmpfs -o size=150G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS Settings:

Logical Processor : Disabled  
Virtualization Technology : Disabled  
NUMA Nodes Per Socket : 4

System Profile : Custom  
CPU Power Management : Maximum Performance  
C-States : Disabled  
Memory Patrol Scrub : Disabled  
PCI ASPM L1 Link Power Management : Disabled  
Periodic Directory Rinse Tuning : Blended  
Determinism Control : Manual  
Determinism Slider : Power Determinism  
Optimizer Mode : Enabled  
Adaptive Allocation : Enabled  
Dram Refresh Delay : Performance

Sysinfo program /mnt/ramdisk/cpu2026rc2/bin/sysinfo  
Rev: 069f95da7e7f5d81b2ce48a82150e54f  
running on M772501-M7725 Sat Feb 7 01:49:44 2026

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2026\_fp\_base = 991

PowerEdge M7725 (AMD EPYC 9755 128-Core Processor)

SPECrate®2026\_fp\_peak = 991

**CPU2026 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Jan-2025  
**Software Availability:** Jan-2026

### Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.4)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent\_hugepage
19. /sys/kernel/mm/transparent\_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

-----  
1. uname -srvm  
Linux 6.8.0-57-generic #59-Ubuntu SMP PREEMPT\_DYNAMIC Sat Mar 15 17:40:59 UTC 2025 x86\_64  
-----

2. w  
01:49:44 up 16 min, 1 user, load average: 0.29, 0.08, 0.02  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root ttyl - 01:39 39.00s 2.26s 1.12s /bin/bash ./amd\_rate\_aocc510\_znver5\_A1.sh  
-----

3. Username  
From environment variable \$USER: root  
-----

4. ulimit -a  
-----

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2026\_fp\_base = 991

PowerEdge M7725 (AMD EPYC 9755 128-Core Processor)

SPECrate®2026\_fp\_peak = 991

**CPU2026 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Jan-2025  
**Software Availability:** Jan-2026

### Platform Notes (Continued)

```

time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)       0
memory(kbytes)         unlimited
locked memory(kbytes) 2097152
process                6189139
nofiles                1024
vmemory(kbytes)        unlimited
locks                  unlimited
rtprio                 0

```

#### 5. sysinfo process ancestry

```

/sbin/init
/bin/login -p --
-bash
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh rate --define DL-VERS=7.0_T01 --output_format
html,pdf,txt
python3 ./run_amd_rate_aocc510_znver5_A1.py
/bin/bash ./amd_rate_aocc510_znver5_A1.sh
runcpu --config amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 2 --define
DL-VERS=7.0_T01 --output_format html,pdf,txt fprate
runcpu --configfile amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 2 --define
DL-VERS=7.0_T01 --output_format html,pdf,txt --nopower --runmode rate --tune base --size
test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2026rc2

```

#### 6. /proc/cpuinfo

```

model name      : AMD EPYC 9755 128-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb00215a
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores     : 128
siblings      : 128
2 physical ids (chips)

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2026\_fp\_base = 991

PowerEdge M7725 (AMD EPYC 9755 128-Core Processor)

SPECrate®2026\_fp\_peak = 991

**CPU2026 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Jan-2025  
**Software Availability:** Jan-2026

### Platform Notes (Continued)

256 processors (hardware threads)

physical id 0: core ids

0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,240-247

physical id 1: core ids

0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,240-247

physical id 0: apicids

0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,240-247

physical id 1: apicids

256-263,272-279,288-295,304-311,320-327,336-343,352-359,368-375,384-391,400-407,416-423,432-439,448-455,464-471,480-487,496-503

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      256
On-line CPU(s) list:        0-255
Vendor ID:                   AuthenticAMD
BIOS Vendor ID:             AMD
Model name:                  AMD EPYC 9755 128-Core Processor
BIOS Model name:            AMD EPYC 9755 128-Core Processor      CPU @ 2.7GHz
BIOS CPU family:            107
CPU family:                  26
Model:                       2
Thread(s) per core:         1
Core(s) per socket:         128
Socket(s):                   2
Stepping:                    1
BogoMIPS:                    5391.50

```

```

Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                             rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                             extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                             sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                             cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                             osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                             perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                             ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

## SPECrate®2026\_fp\_base = 991

### PowerEdge M7725 (AMD EPYC 9755 128-Core Processor)

## SPECrate®2026\_fp\_peak = 991

**CPU2026 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Jan-2025  
**Software Availability:** Jan-2026

### Platform Notes (Continued)

```
smep bmi2 invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_omsave_vmload vgif x2avic v_spec_ctrl
vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca avx512_vp2intersect
flush_lld debug_swap
```

```
L1d cache: 12 MiB (256 instances)
L1i cache: 8 MiB (256 instances)
L2 cache: 256 MiB (256 instances)
L3 cache: 1 GiB (32 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-31
NUMA node1 CPU(s): 32-63
NUMA node2 CPU(s): 64-95
NUMA node3 CPU(s): 96-127
NUMA node4 CPU(s): 128-159
NUMA node5 CPU(s): 160-191
NUMA node6 CPU(s): 192-223
NUMA node7 CPU(s): 224-255
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	12M	12	Data	1	64	1	64
L1i	32K	8M	8	Instruction	1	64	1	64
L2	1M	256M	16	Unified	2	1024	1	64
L3	32M	1G	16	Unified	3	32768	1	64

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 991

PowerEdge M7725 (AMD EPYC 9755 128-Core Processor)

SPECrate®2026\_fp\_peak = 991

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

## Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-31
node 0 size: 192768 MB
node 0 free: 191985 MB
node 1 cpus: 32-63
node 1 size: 193520 MB
node 1 free: 193040 MB
node 2 cpus: 64-95
node 2 size: 193520 MB
node 2 free: 193146 MB
node 3 cpus: 96-127
node 3 size: 193504 MB
node 3 free: 193051 MB
node 4 cpus: 128-159
node 4 size: 193520 MB
node 4 free: 179700 MB
node 5 cpus: 160-191
node 5 size: 193520 MB
node 5 free: 193117 MB
node 6 cpus: 192-223
node 6 size: 193520 MB
node 6 free: 193112 MB
node 7 cpus: 224-255
node 7 size: 193481 MB
node 7 free: 193015 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 12 12 12 32 32 32 32
  1: 12 10 12 12 32 32 32 32
  2: 12 12 10 12 32 32 32 32
  3: 12 12 12 10 32 32 32 32
  4: 32 32 32 32 10 12 12 12
  5: 32 32 32 32 12 10 12 12
  6: 32 32 32 32 12 12 10 12
  7: 32 32 32 32 12 12 12 10

```

9. /proc/meminfo

MemTotal: 1584495840 kB

10. who -r

run-level 5 Feb 7 01:33

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

## SPECrate®2026\_fp\_base = 991

### PowerEdge M7725 (AMD EPYC 9755 128-Core Processor)

## SPECrate®2026\_fp\_peak = 991

**CPU2026 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Feb-2026

**Hardware Availability:** Jan-2025

**Software Availability:** Jan-2026

### Platform Notes (Continued)

-----

11. Systemd service manager version: systemd 255 (255.4-lubuntu8.4)

Default Target	Status
graphical	degraded

-----

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* cxl-monitor.service	loaded	failed	failed	CXL Monitor Daemon

Legend: LOAD -> Reflects whether the unit definition was properly loaded.  
 ACTIVE -> The high-level unit activation state, i.e. generalization of SUB.  
 SUB -> The low-level unit activation state, values depend on unit type.

1 loaded units listed.

-----

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron cxl-monitor dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lm-sensors lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell iscsid nftables rsync serial-getty@ ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysextr systemd-time-wait-sync upower
indirect	systemd-sysupdate systemd-sysupdate-reboot uidd
masked	cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

-----

14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/vmlinuz-6.8.0-57-generic
root=/dev/mapper/ubuntu--vg-ubuntu--lv
ro
```

-----

15. cpupower frequency-info

```
analyzing CPU 53:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2026\_fp\_base = 991

PowerEdge M7725 (AMD EPYC 9755 128-Core Processor)

SPECrate®2026\_fp\_peak = 991

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

### Platform Notes (Continued)

Boost States: 0  
Total States: 3  
Pstate-P0: 2700MHz

-----  
16. tuned-adm active  
Current active profile: throughput-performance

-----  
17. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 0  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 8  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 1  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 1

-----  
18. /sys/kernel/mm/transparent\_hugepage  
defrag [always] defer defer+madvise madvise never  
enabled [always] madvise never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

-----  
19. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 991

PowerEdge M7725 (AMD EPYC 9755 128-Core Processor)

SPECrate®2026\_fp\_peak = 991

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

## Platform Notes (Continued)

### 20. OS release

From /etc/\*-release /etc/\*-version  
os-release Ubuntu 24.04.1 LTS

### 21. Disk information

SPEC is set to: /mnt/ramdisk/cpu2026rc2  
Filesystem Type Size Used Avail Use% Mounted on  
tmpfs tmpfs 150G 11G 140G 7% /mnt/ramdisk

### 22. /sys/devices/virtual/dmi/id

Vendor: Dell Inc.  
Product: PowerEdge M7725  
Product Family: PowerEdge  
Serial: M772501

### 23. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

1x 80CE000080CE M321R8GA0PB1-CCPQC 64 GB 2 rank 6400  
23x 80CE000080CE M321R8GA0PB2-CCPKC 64 GB 2 rank 6400

### 24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.  
BIOS Version: 1.5.3  
BIOS Date: 10/29/2025  
BIOS Revision: 1.5

## Compiler Version Notes

C | 782.lbm\_r(base)

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 991

PowerEdge M7725 (AMD EPYC 9755 128-Core Processor)

SPECrate®2026\_fp\_peak = 991

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

## Compiler Version Notes (Continued)

```

=====
C++      | 731.astcenc_r(base) 736.ocio_r(base) 748.flightdm_r(base)
         | 766.femflow_r(base) 767.nest_r(base) 772.marian_r(base)
=====

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
=====

```

```

=====
C++, C   | 709.cactus_r(base) 737.gmsh_r(base)
=====

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
=====

```

```

=====
Fortran  | 722.palm_r(base) 749.fotonik3d_r(base) 765.roms_r(base)
=====

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
=====

```

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both C and C++:

clang++ clang



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 991

PowerEdge M7725 (AMD EPYC 9755 128-Core Processor)

SPECrate®2026\_fp\_peak = 991

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

## Base Portability Flags

```

709.cactus_r: -DSPEC_LP64
722.palm_r: -DSPEC_LP64
731.ascenc_r: -DSPEC_LP64
736.ocio_r: -fno-finite-math-only -DSPEC_LP64
737.gmsh_r: -fno-fast-math -DSPEC_LP64
748.flightdm_r: -fno-reciprocal-math -DSPEC_LP64
749.fotonik3d_r: -DSPEC_LP64
765.roms_r: -DSPEC_LP64
766.femflow_r: -DSPEC_LP64
767.nest_r: -fno-finite-math-only -DSPEC_LP64
772.marian_r: -DSPEC_LP64
782.lbm_r: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang

```

C++ benchmarks:

```

-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang

```

Fortran benchmarks:

```

-m64 -Mstandard -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -ffast-math -O3
-march=znver5 -fveclib=AMDLIBM -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 991

PowerEdge M7725 (AMD EPYC 9755 128-Core Processor)

SPECrate®2026\_fp\_peak = 991

CPU2026 License: 6573

Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Jan-2025

Tested by: Dell Inc.

Software Availability: Jan-2026

## Base Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

## Peak Optimization Flags

C benchmarks:

782.lbm\_r: basepeak = yes

C++ benchmarks:

731.ascenc\_r: basepeak = yes

736.ocio\_r: basepeak = yes

748.flightdm\_r: basepeak = yes

766.femflow\_r: basepeak = yes

767.nest\_r: basepeak = yes

772.marian\_r: basepeak = yes

Fortran benchmarks:

722.palm\_r: basepeak = yes

749.fotonik3d\_r: basepeak = yes

765.roms\_r: basepeak = yes

Benchmarks using both C and C++:

709.cactus\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 991

PowerEdge M7725 (AMD EPYC 9755 128-Core Processor)

SPECrate®2026\_fp\_peak = 991

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Jan-2025

Software Availability: Jan-2026

## Peak Optimization Flags (Continued)

737.gmsh\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.html>

<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.xml>

<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-07 02:49:43-0500.

Report generated on 2026-05-11 16:38:22 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.