



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2026\_fp\_base = 314

## PowerEdge R570 (Intel Xeon 6787P)

SPECrate®2026\_fp\_peak = 323

CPU2026 License: 6573


Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Nov-2025

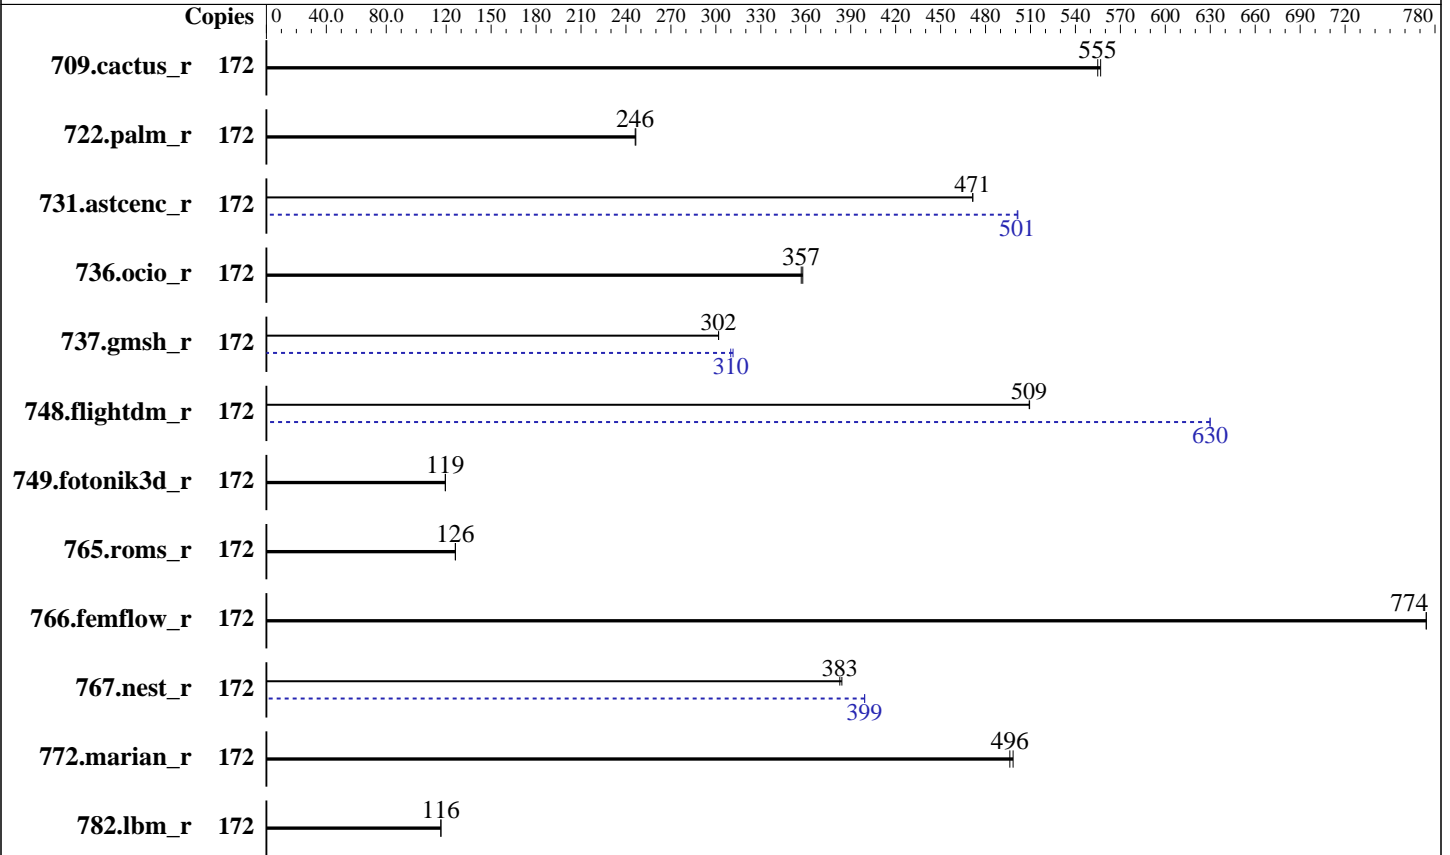

### Hardware

CPU Name: Intel Xeon 6787P  
 Max MHz: 3800  
 Nominal: 2000  
 Enabled: 86 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 64 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 336 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (8 x 64 GB 2Rx4 PC5-6400B-R)  
 Storage: 120 GB on tmpfs  
 Cooling: Air  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 6.4.0-150600.21-default  
 Compiler: C/C++: Version 2025.3 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2025.3 of Intel Fortran  
 Compiler for Linux  
 Compiler Category: Vendor  
 Firmware: Version 1.6.4 released Nov-2025  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator v5.3  
 Power Management: BIOS set to prefer performance at the cost of  
 additional power usage.



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 314

PowerEdge R570 (Intel Xeon 6787P)

SPECrate®2026\_fp\_peak = 323

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Nov-2025

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	172	265	557	<b>266</b>	<b>555</b>			172	265	557	<b>266</b>	<b>555</b>		
722.palm_r	172	<b>922</b>	<b>246</b>	921	247			172	<b>922</b>	<b>246</b>	921	247		
731.ascenc_r	172	<b>306</b>	<b>471</b>	306	472			172	<b>288</b>	<b>501</b>	288	502		
736.ocio_r	172	<b>422</b>	<b>357</b>	420	358			172	<b>422</b>	<b>357</b>	420	358		
737.gmsh_r	172	<b>262</b>	<b>302</b>	262	302			172	253	311	<b>255</b>	<b>310</b>		
748.flightdm_r	172	<b>242</b>	<b>509</b>	242	509			172	196	630	<b>196</b>	<b>630</b>		
749.fotonik3d_r	172	<b>1665</b>	<b>119</b>	1665	119			172	<b>1665</b>	<b>119</b>	1665	119		
765.roms_r	172	<b>2148</b>	<b>126</b>	2147	126			172	<b>2148</b>	<b>126</b>	2147	126		
766.femflow_r	172	<b>326</b>	<b>774</b>	326	774			172	<b>326</b>	<b>774</b>	326	774		
767.nest_r	172	355	384	<b>356</b>	<b>383</b>			172	342	399	<b>342</b>	<b>399</b>		
772.marian_r	172	<b>547</b>	<b>496</b>	545	498			172	<b>547</b>	<b>496</b>	545	498		
782.lbm_r	172	846	116	<b>846</b>	<b>116</b>			172	846	116	<b>846</b>	<b>116</b>		

SPECrate®2026\_fp\_base = 314

SPECrate®2026\_fp\_peak = 323

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/mnt/ramdisk/cpu2026-RC2/lib"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 314

PowerEdge R570 (Intel Xeon 6787P)

SPECrate®2026\_fp\_peak = 323

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Nov-2025

## General Notes (Continued)

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
jemalloc, a general purpose malloc implementation  
built with the CentOS Stream 9, and the system compiler gcc 11.5.0  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>  
Benchmark run from a 120 GB ramdisk created with the cmd: "mount -t tmpfs -o size=120G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS Settings:

Sub NUMA Cluster : Enabled

System Profile : Custom

CPU Power Management : Maximum Performance

C-States : Autonomous

Latency Optimized Mode : Enabled

Energy Efficient Policy : Performance

Sysinfo program /mnt/ramdisk/cpu2026-RC2/bin/sysinfo  
Rev: 069f95da7e7f5d81b2ce48a82150e54f  
running on XRZT94-R570 Wed Feb 4 15:51:22 2026

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. sysctl
15. /sys/kernel/mm/transparent\_hugepage
16. /sys/kernel/mm/transparent\_hugepage/khugepaged
17. OS release
18. Disk information

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 314

PowerEdge R570 (Intel Xeon 6787P)

SPECrate®2026\_fp\_peak = 323

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Nov-2025

## Platform Notes (Continued)

```
19. /sys/devices/virtual/dmi/id
20. dmidecode
21. BIOS
```

```
-----
1. uname -srvm
Linux 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09) x86_64
```

```
-----
2. w
15:51:22 up 4:56, 1 user, load average: 82.87, 147.57, 161.18
USER      TTY      FROM          LOGIN@      IDLE        JCPU       PCPU WHAT
root      tty1     -             10:55       4:48m      1.20s      0.00s /bin/bash
/home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=7.0_T01 --output_format html, pdf, txt
```

```
-----
3. Username
From environment variable $USER: root
```

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 2060626
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 2060626
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
login -- root
-bash
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 314

PowerEdge R570 (Intel Xeon 6787P)

SPECrate®2026\_fp\_peak = 323

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Nov-2025

## Platform Notes (Continued)

```

/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=7.0_T01 --output_format
html,pdf,txt
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=7.0_T01 --output_format
html,pdf,txt
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 172 -c
ic2025.3-graniterapids-cpu2026-0.902-rate-20260121.cfg --define smt-on --define cores=86 --define
physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2
--define DL-VERS=7.0_T01 --output_format html,pdf,txt fprate
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 172 --configfile
ic2025.3-graniterapids-cpu2026-0.902-rate-20260121.cfg --define smt-on --define cores=86 --define
physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all
--iterations 2 --define DL-VERS=7.0_T01 --output_format html,pdf,txt --nopower --runmode rate --tune
base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2026-RC2

```

### 6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) 6787P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 173
stepping        : 1
microcode       : 0x10003f3
bugs            : spectre_v1 spectre_v2 spec_store_bypass swags bhi
cpu cores       : 86
siblings        : 172
1 physical ids (chips)
172 processors (hardware threads)
physical id 0:  core ids 0-42,64-106
physical id 0:  apicids 0-85,128-213

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                172
On-line CPU(s) list:   0-171
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 314

PowerEdge R570 (Intel Xeon 6787P)

SPECrate®2026\_fp\_peak = 323

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Nov-2025

## Platform Notes (Continued)

```

Model name: Intel(R) Xeon(R) 6787P
BIOS Model name: Intel(R) Xeon(R) 6787P CPU @ 2.0GHz
BIOS CPU family: 179
CPU family: 6
Model: 173
Thread(s) per core: 2
Core(s) per socket: 86
Socket(s): 1
Stepping: 1
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
amx_int8 flush_lld arch_capabilities

Virtualization: VT-x
L1d cache: 4 MiB (86 instances)
L1i cache: 5.4 MiB (86 instances)
L2 cache: 172 MiB (86 instances)
L3 cache: 336 MiB (1 instance)
NUMA node(s): 2
NUMA node0 CPU(s): 0-42,86-128
NUMA node1 CPU(s): 43-85,129-171
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 314

PowerEdge R570 (Intel Xeon 6787P)

SPECrate®2026\_fp\_peak = 323

CPU2026 License: 6573

Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Nov-2025

## Platform Notes (Continued)

Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization  
 Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBR SB-eIBRS Not affected; BHI BHI\_DIS\_S  
 Vulnerability Srbds: Not affected  
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4M	12	Data	1	64	1	64
L1i	64K	5.4M	16	Instruction	1	64	1	64
L2	2M	172M	16	Unified	2	2048	1	64
L3	336M	336M	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-42,86-128
node 0 size: 257559 MB
node 0 free: 256669 MB
node 1 cpus: 43-85,129-171
node 1 size: 257622 MB
node 1 free: 229966 MB
node distances:
node  0  1
  0: 10 12
  1: 12 10
```

9. /proc/meminfo

MemTotal: 527546692 kB

10. who -r

run-level 3 Feb 4 10:55

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```
Default Target Status
multi-user      running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled  apparmor auditd cron firewalld getty@ irqbalance issue-generator kbdsettings kdump
kdump-early kdump-notify nvme-fc-boot-connections nvme-autoconnect postfix purge-kernels
rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 314

PowerEdge R570 (Intel Xeon 6787P)

SPECrate®2026\_fp\_peak = 323

CPU2026 License: 6573

Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Nov-2025

## Platform Notes (Continued)

```

wickedd-nanny
enabled-runtime systemd-remount-fs
disabled boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebttables fsidd
grub2-once haveged issue-add-ssh-keys kexec-load lunmask nfs nfs-blkmap rpcbind
rpmconfigcheck rsyncd serial-getty@ systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysextd systemd-time-wait-sync systemd-timesyncd
indirect systemd-userdbd wickedd

```

### 13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=a8a19c3c-99a5-4525-a09c-4861b1a9607b
splash=silent
resume=/dev/disk/by-uuid/28e7a6f8-9664-47dc-9c65-d94db27aeb03
mitigations=auto
quiet
security=apparmor
crashkernel=324M,high
crashkernel=72M,low

```

### 14. sysctl

```

kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

```

### 15. /sys/kernel/mm/transparent\_hugepage

```

defrag always defer defer+madvise [madvise] never
enabled [always] madvise never
hpage_pmd_size 2097152

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 314

PowerEdge R570 (Intel Xeon 6787P)

SPECrate®2026\_fp\_peak = 323

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Nov-2025

## Platform Notes (Continued)

shmem\_enabled always within\_size advise [never] deny force

```

-----
16. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

```

```

-----
17. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

```

-----
18. Disk information
SPEC is set to: /mnt/ramdisk/cpu2026-RC2
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 120G 13G 108G 11% /mnt/ramdisk

```

```

-----
19. /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge R570
Product Family: PowerEdge
Serial: 7XRZT94

```

```

-----
20. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  2x 00AD042300AD HMC94AHBRA480N 64 GB 2 rank 6400
  6x 00AD063200AD HMC94AHBRA277N 64 GB 2 rank 6400

```

```

-----
21. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Dell Inc.
BIOS Version: 1.6.4
BIOS Date: 11/02/2025

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 314

PowerEdge R570 (Intel Xeon 6787P)

SPECrate®2026\_fp\_peak = 323

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Nov-2025

## Platform Notes (Continued)

BIOS Revision: 1.6

## Compiler Version Notes

=====  
C | 782.lbm\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 731.astcenc\_r(base, peak) 736.ocio\_r(base, peak)  
| 748.flightdm\_r(base, peak) 766.femflow\_r(base, peak)  
| 767.nest\_r(base, peak) 772.marian\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 709.cactus\_r(base, peak) 737.gmsh\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 722.palm\_r(base, peak) 749.fotonik3d\_r(base, peak) 765.roms\_r(base,  
| peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icx

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 314

PowerEdge R570 (Intel Xeon 6787P)

SPECrate®2026\_fp\_peak = 323

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Nov-2025

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both C and C++:

icpx icx

## Base Portability Flags

709.cactus\_r: -DSPEC\_LP64  
 722.palm\_r: -DSPEC\_LP64  
 731.ascenc\_r: -DSPEC\_LP64  
 736.ocio\_r: -DSPEC\_LP64  
 737.gmsh\_r: -DSPEC\_LP64 -fno-associative-math  
 748.flightdm\_r: -DSPEC\_LP64  
 749.fotonik3d\_r: -DSPEC\_LP64  
 765.roms\_r: -DSPEC\_LP64  
 766.femflow\_r: -DSPEC\_LP64  
 767.nest\_r: -DSPEC\_LP64  
 772.marian\_r: -DSPEC\_LP64  
 782.lbm\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-z,muldefs -xgraniterapids  
 -mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse  
 -funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib  
 -ljemalloc

C++ benchmarks:

-m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids  
 -mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse  
 -funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib  
 -ljemalloc

Fortran benchmarks:

-m64 -stand f18 -Wl,-z,muldefs -xgraniterapids  
 -mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse  
 -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 314

PowerEdge R570 (Intel Xeon 6787P)

SPECrate®2026\_fp\_peak = 323

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Nov-2025

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-align array32byte -auto -L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib
-ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both C and C++:

```
icpx icx
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
782.lbm_r: basepeak = yes
```

C++ benchmarks:

```
731.astcenc_r: -m64 -std=c++17 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xHost(pass 1)
-ffp-model=fast -xgraniterapids(pass 2) -flto
-mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3
-mfpmath=sse -funroll-loops
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 314

PowerEdge R570 (Intel Xeon 6787P)

SPECrate®2026\_fp\_peak = 323

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Nov-2025

## Peak Optimization Flags (Continued)

731.astcenc\_r (continued):

-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

736.ocio\_r: basepeak = yes

748.flightdm\_r: Same as 731.astcenc\_r

766.femflow\_r: basepeak = yes

767.nest\_r: Same as 731.astcenc\_r

772.marian\_r: basepeak = yes

Fortran benchmarks:

722.palm\_r: basepeak = yes

749.fotonik3d\_r: basepeak = yes

765.roms\_r: basepeak = yes

Benchmarks using both C and C++:

709.cactus\_r: basepeak = yes

737.gmsh\_r: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xHost(pass 1)  
-ffp-model=fast -xgraniterapids(pass 2) -flto  
-mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3  
-mfpmath=sse -funroll-loops  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.html>

<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.xml>

<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.xml>



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 314

PowerEdge R570 (Intel Xeon 6787P)

SPECrate®2026\_fp\_peak = 323

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Nov-2025

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-04 16:51:22-0500.  
Report generated on 2026-05-11 16:38:01 by CPU2026 PDF formatter (unknown).  
Originally published on 2026-05-05.