



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2026\_fp\_base = 662

PowerEdge R7625 (AMD EPYC 9754 128-Core Processor)

SPECrate®2026\_fp\_peak = 662

CPU2026 License: 6573


Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Nov-2024

Tested by: Dell Inc.

Software Availability: Jan-2026

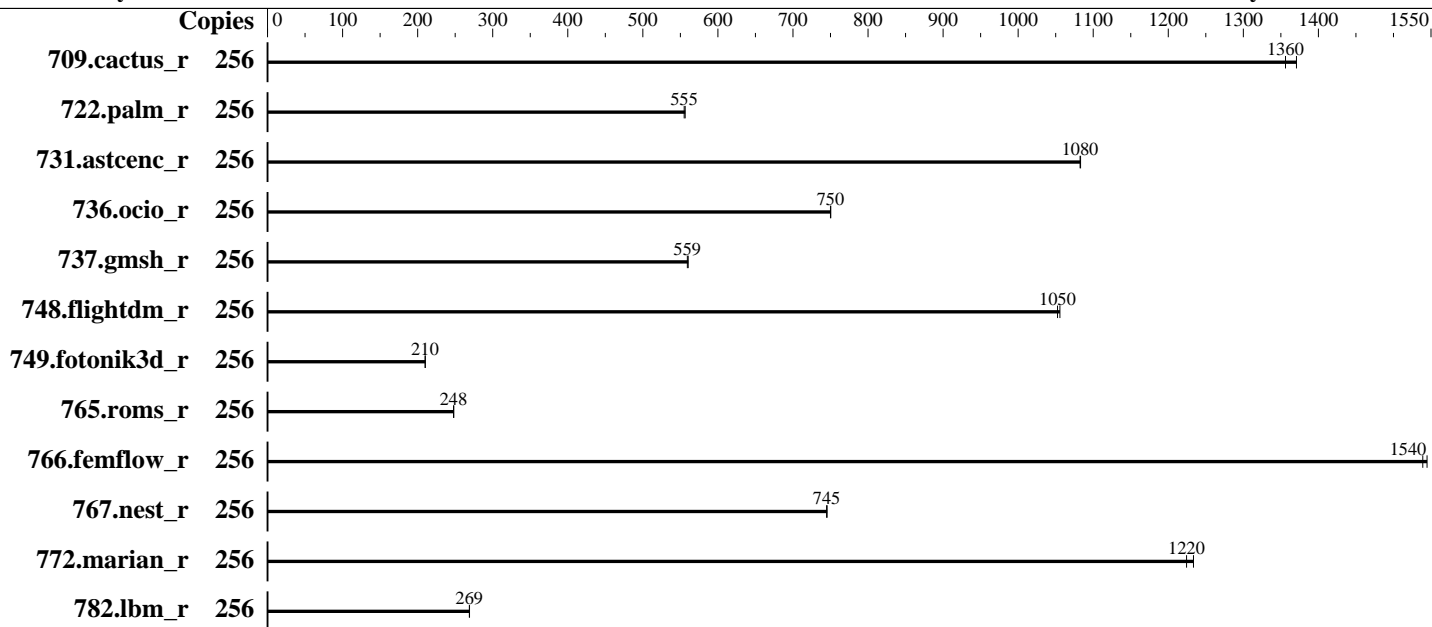

### Hardware

CPU Name: AMD EPYC 9754  
 Max MHz: 3100  
 Nominal: 2250  
 Enabled: 256 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 16 MB shared / 8 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 250 GB on tmpfs  
 Cooling: Air  
 Other: None

### Software

OS: Ubuntu 24.04 LTS  
 6.8.0-44-generic  
 Compiler: C/C++/Fortran: Version 5.1.0 of AOCC  
 Compiler Category: Vendor  
 Firmware: Version 1.11.2 released Dec-2024  
 File System: tmpfs  
 System State: Run level 5 (graphical multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2026\_fp\_base = 662

PowerEdge R7625 (AMD EPYC 9754 128-Core Processor)

SPECrate®2026\_fp\_peak = 662

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Nov-2024  
Software Availability: Jan-2026

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	256	<b><u>162</u></b>	<b><u>1360</u></b>	160	1370			256	<b><u>162</u></b>	<b><u>1360</u></b>	160	1370		
722.palm_r	256	607	556	<b><u>609</u></b>	<b><u>555</u></b>			256	607	556	<b><u>609</u></b>	<b><u>555</u></b>		
731.ascenc_r	256	<b><u>199</u></b>	<b><u>1080</u></b>	199	1080			256	<b><u>199</u></b>	<b><u>1080</u></b>	199	1080		
736.ocio_r	256	299	750	<b><u>299</u></b>	<b><u>750</u></b>			256	299	750	<b><u>299</u></b>	<b><u>750</u></b>		
737.gmsh_r	256	210	560	<b><u>210</u></b>	<b><u>559</u></b>			256	210	560	<b><u>210</u></b>	<b><u>559</u></b>		
748.flightdm_r	256	<b><u>174</u></b>	<b><u>1050</u></b>	174	1060			256	<b><u>174</u></b>	<b><u>1050</u></b>	174	1060		
749.fotonik3d_r	256	1408	210	<b><u>1410</u></b>	<b><u>210</u></b>			256	1408	210	<b><u>1410</u></b>	<b><u>210</u></b>		
765.roms_r	256	<b><u>1627</u></b>	<b><u>248</u></b>	1625	248			256	<b><u>1627</u></b>	<b><u>248</u></b>	1625	248		
766.femflow_r	256	<b><u>244</u></b>	<b><u>1540</u></b>	243	1540			256	<b><u>244</u></b>	<b><u>1540</u></b>	243	1540		
767.nest_r	256	<b><u>273</u></b>	<b><u>745</u></b>	272	745			256	<b><u>273</u></b>	<b><u>745</u></b>	272	745		
772.marian_r	256	328	1230	<b><u>330</u></b>	<b><u>1220</u></b>			256	328	1230	<b><u>330</u></b>	<b><u>1220</u></b>		
782.lbm_r	256	545	269	<b><u>546</u></b>	<b><u>269</u></b>			256	545	269	<b><u>546</u></b>	<b><u>269</u></b>		

SPECrate®2026\_fp\_base = **662**

SPECrate®2026\_fp\_peak = **662**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 662

PowerEdge R7625 (AMD EPYC 9754 128-Core Processor)

SPECrate®2026\_fp\_peak = 662

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Nov-2024

Software Availability: Jan-2026

## Operating System Notes (Continued)

To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations, 'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and 'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/mnt/ramdisk/cpu2026rc2/amd_rate_aocc510_znver5_A_lib/lib:/mnt/ramdisk/
  cpu2026rc2/amd_rate_aocc510_znver5_A_lib/lib32:"
MALLOCONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB Memory using Ubuntu 24.04

Benchmark run from a 250 GB ramdisk created with the cmd: "mount -t tmpfs -o size=250G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

DRAM Refresh Delay : Performance  
DIMM Self Healing on  
Uncorrectable Memory Error : Disabled

Virtualization Technology : Disabled  
NUMA Nodes per Socket : 4

System Profile : Custom  
C-States : Disabled  
Memory Patrol Scrub : Disabled  
PCI ASPM L1 Link  
Power Management : Disabled  
Determinism Slider : Power Determinism

Sysinfo program /mnt/ramdisk/cpu2026rc2/bin/sysinfo  
Rev: 069f95da7e7f5d81b2ce48a82150e54f  
running on SLR7601-R7625 Tue Feb 3 21:55:00 2026

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2026\_fp\_base = 662

PowerEdge R7625 (AMD EPYC 9754 128-Core Processor)

SPECrate®2026\_fp\_peak = 662

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Nov-2024

Software Availability: Jan-2026

## Platform Notes (Continued)

### Table of contents

- 1. uname -srvm
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 255 (255.4-lubuntu8)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent\_hugepage
- 17. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -srvm
Linux 6.8.0-44-generic #44-Ubuntu SMP PREEMPT_DYNAMIC Tue Aug 13 13:35:26 UTC 2024 x86_64
```

```
2. w
21:55:00 up 5:04, 1 user, load average: 196.37, 417.28, 465.68
USER      TTY      FROM          LOGIN@      IDLE       JCPU      PCPU      WHAT
root      tty1    -             18:34      3:19m    6.82s    3.46s    /bin/bash ./amd_rate_aocc510_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2026\_fp\_base = 662

PowerEdge R7625 (AMD EPYC 9754 128-Core Processor)

SPECrate®2026\_fp\_peak = 662

**CPU2026 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Nov-2024  
**Software Availability:** Jan-2026

### Platform Notes (Continued)

stack(kbytes)	unlimited
coredump(blocks)	0
memory(kbytes)	unlimited
locked memory(kbytes)	2097152
process	6189609
nofiles	1024
vmemory(kbytes)	unlimited
locks	unlimited
rtprio	0

-----  
5. sysinfo process ancestry

```

/sbin/init
/bin/login -p --
-bash
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define
DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define DL-VERS=5.3.6 --output_format html,pdf,txt
python3 ./run_amd_rate_aocc510_znver5_A1.py
/bin/bash ./amd_rate_aocc510_znver5_A1.sh
runcpu --config amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 2 --define
DL-BIOS-NPS=4 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-LogProc=1 --define
DL-BIOS-adddcD=1 --define DL-VERS=5.3.6 --output_format html,pdf,txt fprate
runcpu --configfile amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 2 --define
DL-BIOS-NPS=4 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-LogProc=1 --define
DL-BIOS-adddcD=1 --define DL-VERS=5.3.6 --output_format html,pdf,txt --nopower --runmode rate --tune base
--size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2026rc2

```

-----  
6. /proc/cpuinfo

```

model name      : AMD EPYC 9754 128-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 160
stepping       : 1
microcode      : 0xaa00116
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size       : 3584 4K pages
cpu cores      : 128
siblings       : 256
2 physical ids (chips)
512 processors (hardware threads)

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2026\_fp\_base = 662

PowerEdge R7625 (AMD EPYC 9754 128-Core Processor)

SPECrate®2026\_fp\_peak = 662

CPU2026 License: 6573

Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Nov-2024

Tested by: Dell Inc.

Software Availability: Jan-2026

### Platform Notes (Continued)

physical id 0: core ids 0-127  
physical id 1: core ids 0-127  
physical id 0: apicids 0-255  
physical id 1: apicids 256-511

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      512
On-line CPU(s) list:        0-511
Vendor ID:                   AuthenticAMD
BIOS Vendor ID:             AMD
Model name:                  AMD EPYC 9754 128-Core Processor
BIOS Model name:            AMD EPYC 9754 128-Core Processor      CPU @ 2.2GHz
BIOS CPU family:            107
CPU family:                  25
Model:                       160
Thread(s) per core:         2
Core(s) per socket:         128
Socket(s):                   2
Stepping:                    1
Frequency boost:             enabled
CPU(s) scaling MHz:         78%
CPU max MHz:                 2250.0000
CPU min MHz:                 1500.0000
BogoMIPS:                    4500.95

```

Flags:

```

fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtsclp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpxt
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2026\_fp\_base = 662

PowerEdge R7625 (AMD EPYC 9754 128-Core Processor)

SPECrate®2026\_fp\_peak = 662

CPU2026 License: 6573

Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Nov-2024

Tested by: Dell Inc.

Software Availability: Jan-2026

### Platform Notes (Continued)

flushbyasid decodeassists pausefilter pfthreshold avic  
v\_vmsave\_vmload vgif x2avic v\_spec\_ctrl vnmi avx512vbmi umip pku  
ospke avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg  
avx512\_vpopcntdq la57 rdpid overflow\_recov succor smca fsrm flush\_llid  
debug\_swap

L1d cache:	8 MiB (256 instances)
L1i cache:	8 MiB (256 instances)
L2 cache:	256 MiB (256 instances)
L3 cache:	512 MiB (32 instances)
NUMA node(s):	8
NUMA node0 CPU(s):	0-31,256-287
NUMA node1 CPU(s):	32-63,288-319
NUMA node2 CPU(s):	64-95,320-351
NUMA node3 CPU(s):	96-127,352-383
NUMA node4 CPU(s):	128-159,384-415
NUMA node5 CPU(s):	160-191,416-447
NUMA node6 CPU(s):	192-223,448-479
NUMA node7 CPU(s):	224-255,480-511
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Mitigation; Safe RET
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBR SB-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	8M	8	Data	1	64	1	64
L1i	32K	8M	8	Instruction	1	64	1	64
L2	1M	256M	8	Unified	2	2048	1	64
L3	16M	512M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)  
node 0 cpus: 0-31,256-287  
node 0 size: 192992 MB

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2026\_fp\_base = 662

PowerEdge R7625 (AMD EPYC 9754 128-Core Processor)

SPECrate®2026\_fp\_peak = 662

**CPU2026 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Feb-2026

**Hardware Availability:** Nov-2024

**Software Availability:** Jan-2026

### Platform Notes (Continued)

```

node 0 free: 190181 MB
node 1 cpus: 32-63,288-319
node 1 size: 193512 MB
node 1 free: 191243 MB
node 2 cpus: 64-95,320-351
node 2 size: 193512 MB
node 2 free: 191309 MB
node 3 cpus: 96-127,352-383
node 3 size: 193453 MB
node 3 free: 191218 MB
node 4 cpus: 128-159,384-415
node 4 size: 193512 MB
node 4 free: 191264 MB
node 5 cpus: 160-191,416-447
node 5 size: 193512 MB
node 5 free: 191375 MB
node 6 cpus: 192-223,448-479
node 6 size: 193512 MB
node 6 free: 180690 MB
node 7 cpus: 224-255,480-511
node 7 size: 193467 MB
node 7 free: 191261 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10 12 12 12 32 32 32 32
  1:  12 10 12 12 32 32 32 32
  2:  12 12 10 12 32 32 32 32
  3:  12 12 12 10 32 32 32 32
  4:  32 32 32 32 10 12 12 12
  5:  32 32 32 32 12 10 12 12
  6:  32 32 32 32 12 12 10 12
  7:  32 32 32 32 12 12 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:      1584612652 kB

```

```

-----
10. who -r
    run-level 5 Feb 3 16:51

```

```

-----
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8)
    Default Target Status
    graphical      running

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2026\_fp\_base = 662

PowerEdge R7625 (AMD EPYC 9754 128-Core Processor)

SPECrate®2026\_fp\_peak = 662

CPU2026 License: 6573

Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Nov-2024

Tested by: Dell Inc.

Software Availability: Jan-2026

### Platform Notes (Continued)

#### 12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lm-sensors lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell iscsid nftables rsync serial-getty@ ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext systemd-time-wait-sync upower
indirect	systemd-sysupdate systemd-sysupdate-reboot uidd
masked	cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

#### 13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.8.0-44-generic
root=UUID=8458ae54-58cc-4621-9289-b1d743fde503
ro

```

#### 14. cpupower frequency-info

```

analyzing CPU 448:
  current policy: frequency should be within 1.50 GHz and 2.25 GHz.
                  The governor "schedutil" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes
  Boost States: 0
  Total States: 3
  Pstate-P0: 2250MHz

```

#### 15. sysctl

```

kernel.numa_balancing      1
kernel.randomize_va_space  0
vm.compaction_proactiveness 20
vm.dirty_background_bytes  0
vm.dirty_background_ratio  10
vm.dirty_bytes             0
vm.dirty_expire_centisecs  3000
vm.dirty_ratio             8

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2026\_fp\_base = 662

PowerEdge R7625 (AMD EPYC 9754 128-Core Processor)

SPECrate®2026\_fp\_peak = 662

**CPU2026 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Feb-2026

**Hardware Availability:** Nov-2024

**Software Availability:** Jan-2026

### Platform Notes (Continued)

```

vm.dirty_writeback_centisecs      500
vm.dirtytime_expire_seconds      43200
vm.extfrag_threshold              500
vm.min_unmapped_ratio            1
vm.nr_hugepages                   0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages       0
vm.swappiness                     1
vm.watermark_boost_factor        15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode             1

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04 LTS

```

```

-----
19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2026rc2

```

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	250G	10G	241G	4%	/mnt/ramdisk

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:      Dell Inc.
Product:     PowerEdge R7625
Product Family: PowerEdge
Serial:      SLR7601

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 662

PowerEdge R7625 (AMD EPYC 9754 128-Core Processor)

SPECrate®2026\_fp\_peak = 662

CPU2026 License: 6573

Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Nov-2024

Tested by: Dell Inc.

Software Availability: Jan-2026

## Platform Notes (Continued)

### 21. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

6x 802C0000802C MTC40F2046S1RC48BA1 64 GB 2 rank 4800  
10x 80AD000080AD HMCG94AEBRA109N 64 GB 2 rank 4800  
8x 80AD000080AD HMCG94MEBRA109N 64 GB 2 rank 4800

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.  
BIOS Version: 1.11.2  
BIOS Date: 12/18/2024  
BIOS Revision: 1.11

## Compiler Version Notes

C | 782.lbm\_r(base)

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

C++ | 731.astcenc\_r(base) 736.ocio\_r(base) 748.flightdm\_r(base)  
| 766.femflow\_r(base) 767.nest\_r(base) 772.marian\_r(base)

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

C++, C | 709.cactus\_r(base) 737.gmsh\_r(base)

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 662

PowerEdge R7625 (AMD EPYC 9754 128-Core Processor)

SPECrate®2026\_fp\_peak = 662

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Nov-2024

Software Availability: Jan-2026

## Compiler Version Notes (Continued)

Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

-----  
Fortran | 722.palm\_r(base) 749.fotonik3d\_r(base) 765.roms\_r(base)

-----  
AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin  
-----

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both C and C++:

clang++ clang

## Base Portability Flags

709.cactus\_r: -DSPEC\_LP64  
722.palm\_r: -DSPEC\_LP64  
731.ascenc\_r: -DSPEC\_LP64  
736.ocio\_r: -fno-finite-math-only -DSPEC\_LP64  
737.gmsh\_r: -fno-fast-math -DSPEC\_LP64  
748.flightdm\_r: -fno-reciprocal-math -DSPEC\_LP64  
749.fotonik3d\_r: -DSPEC\_LP64  
765.roms\_r: -DSPEC\_LP64  
766.femflow\_r: -DSPEC\_LP64  
767.nest\_r: -fno-finite-math-only -DSPEC\_LP64  
772.marian\_r: -DSPEC\_LP64  
782.lbm\_r: -DSPEC\_LP64



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 662

PowerEdge R7625 (AMD EPYC 9754 128-Core Processor)

SPECrate®2026\_fp\_peak = 662

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Nov-2024

Software Availability: Jan-2026

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

C++ benchmarks:

```
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -Mstandard -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -ffast-math -O3
-march=znver5 -fveclib=AMDLIBM -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

## Peak Optimization Flags

C benchmarks:

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 662

PowerEdge R7625 (AMD EPYC 9754 128-Core Processor)

SPECrate®2026\_fp\_peak = 662

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Nov-2024

Software Availability: Jan-2026

## Peak Optimization Flags (Continued)

782.lbm\_r: basepeak = yes

C++ benchmarks:

731.astcenc\_r: basepeak = yes

736.ocio\_r: basepeak = yes

748.flightdm\_r: basepeak = yes

766.femflow\_r: basepeak = yes

767.nest\_r: basepeak = yes

772.marian\_r: basepeak = yes

Fortran benchmarks:

722.palm\_r: basepeak = yes

749.fotonik3d\_r: basepeak = yes

765.roms\_r: basepeak = yes

Benchmarks using both C and C++:

709.cactus\_r: basepeak = yes

737.gmsh\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.html>

<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.xml>

<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-03 16:54:59-0500.

Report generated on 2026-05-11 16:38:13 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.