



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2026\_int\_base = 5.87

## PowerEdge R770 (Intel Xeon 6732P)

SPECspeed®2026\_int\_peak = 5.92

CPU2026 License: 6573


Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Nov-2025

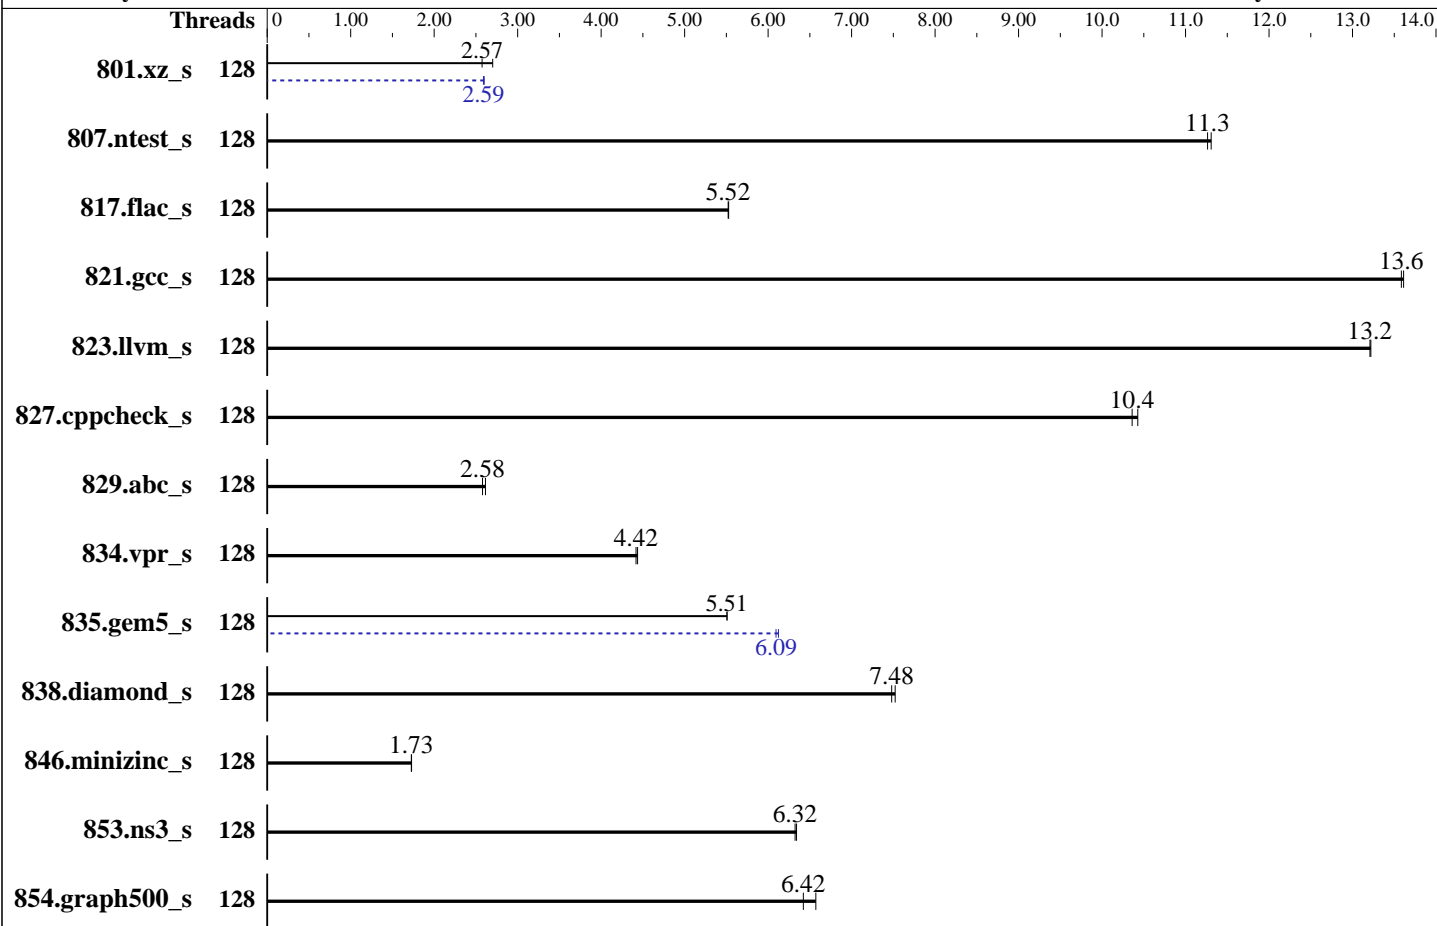

### Hardware

CPU Name: Intel Xeon 6732P  
 Max MHz: 4300  
 Nominal: 3800  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 64 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 144 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)  
 Storage: 100 GB on tmpfs  
 Cooling: Air  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 6.4.0-150600.21-default  
 Compiler: C/C++: Version 2025.3 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2025.3 of Intel Fortran  
 Compiler for Linux  
 Compiler Category: Vendor  
 Firmware: Version 1.6.4 released Nov-2025  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator v5.3  
 Power Management: BIOS set to prefer performance at the cost of  
 additional power usage.



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2026\_int\_base = 5.87

PowerEdge R770 (Intel Xeon 6732P)

SPECSpeed®2026\_int\_peak = 5.92

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Nov-2025

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
801.xz_s	128	219	2.70	<u>230</u>	<u>2.57</u>			128	227	2.60	<u>228</u>	<u>2.59</u>		
807.ntest_s	128	<u>101</u>	<u>11.3</u>	101	11.3			128	<u>101</u>	<u>11.3</u>	101	11.3		
817.flac_s	128	314	5.53	<u>315</u>	<u>5.52</u>			128	314	5.53	<u>315</u>	<u>5.52</u>		
821.gcc_s	128	<u>152</u>	<u>13.6</u>	152	13.6			128	<u>152</u>	<u>13.6</u>	152	13.6		
823.llvm_s	128	107	13.2	<u>107</u>	<u>13.2</u>			128	107	13.2	<u>107</u>	<u>13.2</u>		
827.cppcheck_s	128	<u>108</u>	<u>10.4</u>	107	10.4			128	<u>108</u>	<u>10.4</u>	107	10.4		
829.abc_s	128	<u>322</u>	<u>2.58</u>	318	2.61			128	<u>322</u>	<u>2.58</u>	318	2.61		
834.vpr_s	128	215	4.44	<u>216</u>	<u>4.42</u>			128	215	4.44	<u>216</u>	<u>4.42</u>		
835.gem5_s	128	207	5.51	<u>207</u>	<u>5.51</u>			128	<u>187</u>	<u>6.09</u>	186	6.12		
838.diamond_s	128	<u>134</u>	<u>7.48</u>	133	7.52			128	<u>134</u>	<u>7.48</u>	133	7.52		
846.minizinc_s	128	387	1.73	<u>388</u>	<u>1.73</u>			128	387	1.73	<u>388</u>	<u>1.73</u>		
853.ns3_s	128	182	6.34	<u>182</u>	<u>6.32</u>			128	182	6.34	<u>182</u>	<u>6.32</u>		
854.graph500_s	128	93.0	6.57	<u>95.1</u>	<u>6.42</u>			128	93.0	6.57	<u>95.1</u>	<u>6.42</u>		

SPECSpeed®2026\_int\_base = 5.87

SPECSpeed®2026\_int\_peak = 5.92

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/mnt/ramdisk/cpu2026rc2/lib"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
jemalloc, a general purpose malloc implementation  
built with the CentOS Stream 9, and the system compiler gcc 11.5.0  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>  
Benchmark run from a 100 GB ramdisk created with the cmd: "mount -t tmpfs -o size=100G tmpfs /mnt/ramdisk"



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_int\_base = 5.87

PowerEdge R770 (Intel Xeon 6732P)

SPECspeed®2026\_int\_peak = 5.92

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Nov-2025

## Platform Notes

BIOS Settings:

```

System Profile : Custom
CPU Power Management : Maximum Performance
    C1E : Disabled
    C-States : Autonomous
Latency Optimized Mode : Enabled
Energy Efficient Policy : Performance
    DIMM Self Healing -
on Uncorrectable Memory Error : Disabled

```

```

Sysinfo program /mnt/ramdisk/cpu2026rc2/bin/sysinfo
Rev: 069f95da7e7f5d81b2ce48a82150e54f
running on WCSTCX4-R770 Thu Feb  5 20:35:48 2026

```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----  
1. uname -srvm

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_int\_base = 5.87

PowerEdge R770 (Intel Xeon 6732P)

SPECspeed®2026\_int\_peak = 5.92

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Nov-2025

## Platform Notes (Continued)

Linux 6.4.0-150600.21-default #1 SMP PREEMPT\_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09) x86\_64

```

-----
2. w
  20:35:48 up 2 min,  1 user,  load average: 1.14, 1.39, 0.62
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1     -             20:33    27.00s 0.96s  0.00s /bin/bash
/home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=7.0_T02 --output_format html,pdf,txt

```

```

-----
3. Username
  From environment variable $USER:  root

```

```

-----
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority     (-e) 0
  file size               (blocks, -f) unlimited
  pending signals         (-i) 4124983
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files              (-n) 1024
  pipe size               (512 bytes, -p) 8
  POSIX message queues    (bytes, -q) 819200
  real-time priority      (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time                (seconds, -t) unlimited
  max user processes      (-u) 4124983
  virtual memory          (kbytes, -v) unlimited
  file locks              (-x) unlimited

```

```

-----
5. sysinfo process ancestry
  /usr/lib/systemd/systemd --switched-root --system --deserialize=42
  login -- root
  -bash
  /bin/bash /home/DellFiles/bin/DELL_speed.sh
  /bin/bash /home/DellFiles/bin/dell-run-main.sh speed
  /bin/bash /home/DellFiles/bin/dell-run-main.sh speed
  /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=7.0_T02 --output_format
  html,pdf,txt
  /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=7.0_T02 --output_format
  html,pdf,txt
  runcpu --nobuild --reportable --action validate --define default-platform-flags -c
  ic2025.3-graniterapids-cpu2026-0.902-speed-20260121.cfg --threads 128 --define cores=64 --tune base,peak
  -o all --define intsppedaffinity --define smt-on --define drop_caches --iterations 2 --define

```

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_int\_base = 5.87

PowerEdge R770 (Intel Xeon 6732P)

SPECspeed®2026\_int\_peak = 5.92

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Nov-2025

## Platform Notes (Continued)

```
DL-VERS=7.0_T02 --output_format html,pdf,txt intspeed
runcpu --nobuild --reportable --action validate --define default-platform-flags --configfile
ic2025.3-graniterapids-cpu2026-0.902-speed-20260121.cfg --threads 128 --define cores=64 --tune base,peak
--output_format all --define intspeedaffinity --define smt-on --define drop_caches --iterations 2 --define
DL-VERS=7.0_T02 --output_format html,pdf,txt --nopower --runmode speed --tune base:peak --size refspeed
intspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2026.001/templogs/preenv.intspeed.001.0.log
--lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2026rc2
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6732P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x10003f3
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores     : 32
siblings       : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

## 7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel
Model name:             Intel(R) Xeon(R) 6732P
BIOS Model name:       Intel(R) Xeon(R) 6732P  CPU @ 3.8GHz
BIOS CPU family:       179
CPU family:             6
Model:                  173
```

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_int\_base = 5.87

PowerEdge R770 (Intel Xeon 6732P)

SPECspeed®2026\_int\_peak = 5.92

CPU2026 License: 6573

Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Nov-2025

## Platform Notes (Continued)

```

Thread(s) per core:                2
Core(s) per socket:               32
Socket(s):                         2
Stepping:                          1
BogoMIPS:                          7600.00
Flags:                               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hfi vnni avx512vbmi umip pku ospke waitpkg avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd frsm
md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
amx_tile amx_int8 flush_lld arch_capabilities
Virtualization:                    VT-x
L1d cache:                          3 MiB (64 instances)
L1i cache:                          4 MiB (64 instances)
L2 cache:                           128 MiB (64 instances)
L3 cache:                           288 MiB (2 instances)
NUMA node(s):                       2
NUMA node0 CPU(s):                  0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48
,50,52,54,56,58,60,62,64,66,68,70,72,74,76,78,80,82,84,86,88,90,92,94
,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126
NUMA node1 CPU(s):                  1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49
,51,53,55,57,59,61,63,65,67,69,71,73,75,77,79,81,83,85,87,89,91,93,95
,97,99,101,103,105,107,109,111,113,115,117,119,121,123,125,127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:        Not affected
Vulnerability L1tf:                 Not affected
Vulnerability Mds:                  Not affected
Vulnerability Meltdown:             Not affected
Vulnerability Mmio stale data:      Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:             Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:     Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:           Mitigation; usercopy/swaps barriers and __user pointer sanitization

```

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_int\_base = 5.87

PowerEdge R770 (Intel Xeon 6732P)

SPECspeed®2026\_int\_peak = 5.92

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Nov-2025

## Platform Notes (Continued)

Vulnerability Spectre v2: Mitigation: Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI\_DIS\_S  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	64K	4M	16	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	144M	288M	16	Unified	3	147456	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus:

0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126

node 0 size: 515580 MB

node 0 free: 487285 MB

node 1 cpus:

1, 3, 5, 7, 9, 11, 13, 15, 17, 19, 21, 23, 25, 27, 29, 31, 33, 35, 37, 39, 41, 43, 45, 47, 49, 51, 53, 55, 57, 59, 61, 63, 65, 67, 69, 71, 73, 75, 77, 79, 81, 83, 85, 87, 89, 91, 93, 95, 97, 99, 101, 103, 105, 107, 109, 111, 113, 115, 117, 119, 121, 123, 125, 127

node 1 size: 515691 MB

node 1 free: 514375 MB

node distances:

node 0 1  
0: 10 21  
1: 21 10

9. /proc/meminfo

MemTotal: 1056022640 kB

10. who -r

run-level 3 Feb 5 20:33

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_int\_base = 5.87

PowerEdge R770 (Intel Xeon 6732P)

SPECspeed®2026\_int\_peak = 5.92

CPU2026 License: 6573

Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Nov-2025

## Platform Notes (Continued)

```

enabled      YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
              issue-generator kbdsettings kdump kdump-early kdump-notify klog lvm2-monitor nscd
              nvme-fc-boot-connections nvme-fc-autoconnect postfix purge-kernels rollback rsyslog smartd
              sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny

enabled-runtime  systemd-remount-fs

disabled      autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
              chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
              firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
              man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
              smartd-generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
              systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
              vncserver@

indirect      systemd-userdbd wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=1e930d08-d113-4bf3-bd14-6f5af91a4434
splash=silent
resume=/dev/disk/by-uuid/724f67dd-a149-4310-8781-db2d5bd0dd6f
mitigations=auto
quiet
security=apparmor
crashkernel=348M,high
crashkernel=72M,low

```

```

-----
14. cpupower frequency-info
analyzing CPU 49:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500

```

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_int\_base = 5.87

PowerEdge R770 (Intel Xeon 6732P)

SPECspeed®2026\_int\_peak = 5.92

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Nov-2025

## Platform Notes (Continued)

```

vm.min_unmapped_ratio      1
vm.nr_hugepages             0
vm.nr_hugepages_mempolicy   0
vm.nr_overcommit_hugepages  0
vm.swappiness               60
vm.watermark_boost_factor   15000
vm.watermark_scale_factor   10
vm.zone_reclaim_mode        0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

```

-----
19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2026rc2
Filesystem      Type      Size  Used Avail Use% Mounted on
tmpfs           tmpfs    100G   13G   88G  13% /mnt/ramdisk

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:          Dell Inc.
Product:         PowerEdge R770
Product Family: PowerEdge
Serial:          WCSTCX4

```

```

-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.

```

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_int\_base = 5.87

PowerEdge R770 (Intel Xeon 6732P)

SPECspeed®2026\_int\_peak = 5.92

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Nov-2025

## Platform Notes (Continued)

The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

1x 002C0632002C MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400  
1x 002C069D002C MTC40F2046S1RC64BD1 USFF 64 GB 2 rank 6400  
12x 002C069D002C MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400  
2x 00AD063200AD HMC94AHBRA277N 64 GB 2 rank 6400

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.  
BIOS Version: 1.6.4  
BIOS Date: 11/02/2025  
BIOS Revision: 1.6

## Compiler Version Notes

C | 854.graph500\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

C++ | 807.ntest\_s(base, peak) 827.cppcheck\_s(base, peak) 853.ns3\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

C++, C | 801.xz\_s(base, peak) 817.flac\_s(base, peak) 821.gcc\_s(base, peak)  
| 823.llvm\_s(base, peak) 829.abc\_s(base, peak) 834.vpr\_s(base, peak)  
| 835.gem5\_s(base, peak) 838.diamond\_s(base, peak)  
| 846.minizinc\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_int\_base = 5.87

PowerEdge R770 (Intel Xeon 6732P)

SPECspeed®2026\_int\_peak = 5.92

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Nov-2025

## Compiler Version Notes (Continued)

---

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Benchmarks using both C and C++:

icpx icx

## Base Portability Flags

801.xz\_s: -DSPEC\_LP64  
807.ntest\_s: -DSPEC\_LP64  
817.flac\_s: -DSPEC\_LP64  
821.gcc\_s: -DSPEC\_LP64  
823.llvm\_s: -DSPEC\_LP64  
827.cppcheck\_s: -DSPEC\_LP64  
829.abc\_s: -DSPEC\_LP64  
834.vpr\_s: -DSPEC\_LP64  
835.gem5\_s: -DSPEC\_LP64  
838.diamond\_s: -DSPEC\_LP64  
846.minizinc\_s: -DSPEC\_LP64  
853.ns3\_s: -DSPEC\_LP64  
854.graph500\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-z,muldefs -xgraniterapids  
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC\_OPENMP  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

C++ benchmarks:

807.ntest\_s: -m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids  
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_int\_base = 5.87

PowerEdge R770 (Intel Xeon 6732P)

SPECspeed®2026\_int\_peak = 5.92

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Nov-2025

## Base Optimization Flags (Continued)

807.ntest\_s (continued):

```
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib  
-ljemalloc
```

827.cppcheck\_s: -m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids

```
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-pthread -L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

853.ns3\_s: -m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids

```
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Benchmarks using both C and C++:

801.xz\_s: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xgraniterapids

```
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-pthread -L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

817.flac\_s: Same as 801.xz\_s

821.gcc\_s: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xgraniterapids

```
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

823.llvm\_s: Same as 801.xz\_s

829.abc\_s: Same as 821.gcc\_s

834.vpr\_s: Same as 821.gcc\_s

835.gem5\_s: Same as 801.xz\_s

838.diamond\_s: Same as 801.xz\_s

846.minizinc\_s: Same as 801.xz\_s



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_int\_base = 5.87

PowerEdge R770 (Intel Xeon 6732P)

SPECspeed®2026\_int\_peak = 5.92

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Nov-2025

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Benchmarks using both C and C++:

icpx icx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

854.graph500\_s: basepeak = yes

C++ benchmarks:

807.ntest\_s: basepeak = yes

827.cppcheck\_s: basepeak = yes

853.ns3\_s: basepeak = yes

Benchmarks using both C and C++:

801.xz\_s: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xHost(pass 1)  
-ffp-model=fast -xgraniterapids(pass 2) -flto  
-mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3  
-mfpmath=sse -funroll-loops -pthread  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

817.flac\_s: basepeak = yes

821.gcc\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_int\_base = 5.87

PowerEdge R770 (Intel Xeon 6732P)

SPECspeed®2026\_int\_peak = 5.92

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Nov-2025

## Peak Optimization Flags (Continued)

823.llvm\_s: basepeak = yes

829.abc\_s: basepeak = yes

834.vpr\_s: basepeak = yes

835.gem5\_s: Same as 801.xz\_s

838.diamond\_s: basepeak = yes

846.minizinc\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.html>

<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.xml>

<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-05 10:05:48-0500.

Report generated on 2026-05-04 23:28:37 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.