



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

### SPECrate®2026\_fp\_base = 489

## PowerEdge R770 (Intel Xeon 6780E)

### SPECrate®2026\_fp\_peak = 502

CPU2026 License: 6573


Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Nov-2025

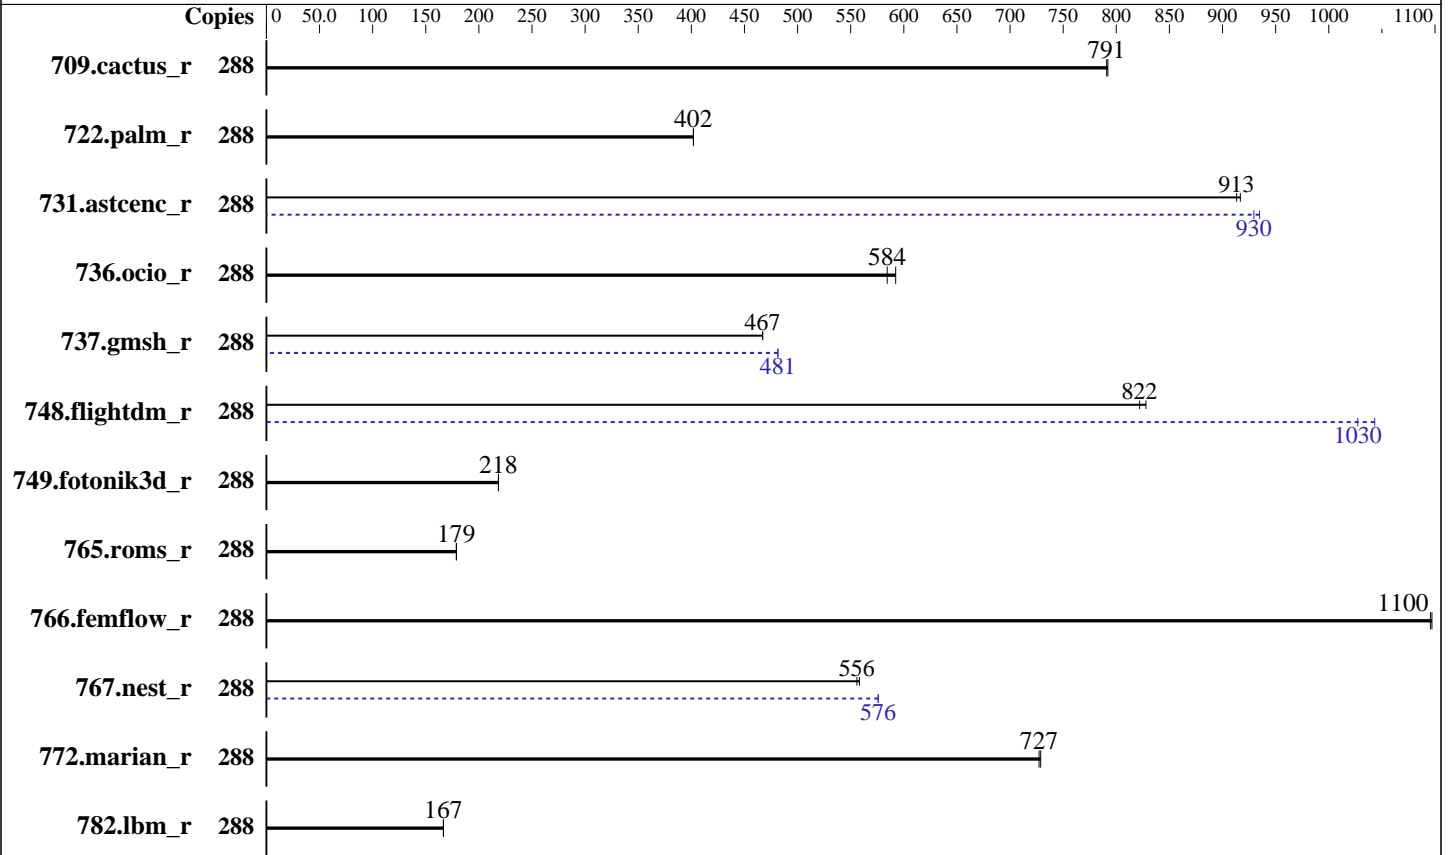

### Hardware

CPU Name: Intel Xeon 6780E  
 Max MHz: 3000  
 Nominal: 2200  
 Enabled: 288 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 4 MB I+D on chip per core  
 L3: 108 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)  
 Storage: 160 GB on tmpfs  
 Cooling: Air  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 6.4.0-150600.21-default  
 Compiler: C/C++: Version 2025.3 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2025.3 of Intel Fortran  
 Compiler for Linux  
 Compiler Category: Vendor  
 Firmware: Version 1.6.4 released Nov-2025  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator v5.3  
 Power Management: BIOS set to prefer performance at the cost of  
 additional power usage.



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 489

PowerEdge R770 (Intel Xeon 6780E)

SPECrate®2026\_fp\_peak = 502

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Nov-2025

## Results Table

| Benchmark       | Base   |             |            |            |             |         |       | Peak   |             |            |            |             |         |       |
|-----------------|--------|-------------|------------|------------|-------------|---------|-------|--------|-------------|------------|------------|-------------|---------|-------|
|                 | Copies | Seconds     | Ratio      | Seconds    | Ratio       | Seconds | Ratio | Copies | Seconds     | Ratio      | Seconds    | Ratio       | Seconds | Ratio |
| 709.cactus_r    | 288    | <b>312</b>  | <b>791</b> | 312        | 792         |         |       | 288    | <b>312</b>  | <b>791</b> | 312        | 792         |         |       |
| 722.palm_r      | 288    | <b>946</b>  | <b>402</b> | 946        | 402         |         |       | 288    | <b>946</b>  | <b>402</b> | 946        | 402         |         |       |
| 731.ascenc_r    | 288    | 264         | 917        | <b>265</b> | <b>913</b>  |         |       | 288    | 259         | 935        | <b>260</b> | <b>930</b>  |         |       |
| 736.ocio_r      | 288    | 425         | 592        | <b>431</b> | <b>584</b>  |         |       | 288    | 425         | 592        | <b>431</b> | <b>584</b>  |         |       |
| 737.gmsh_r      | 288    | 283         | 467        | <b>283</b> | <b>467</b>  |         |       | 288    | 275         | 482        | <b>275</b> | <b>481</b>  |         |       |
| 748.flightdm_r  | 288    | 249         | 828        | <b>251</b> | <b>822</b>  |         |       | 288    | 198         | 1040       | <b>201</b> | <b>1030</b> |         |       |
| 749.fotonik3d_r | 288    | <b>1525</b> | <b>218</b> | 1524       | 219         |         |       | 288    | <b>1525</b> | <b>218</b> | 1524       | 219         |         |       |
| 765.roms_r      | 288    | <b>2537</b> | <b>179</b> | 2536       | 179         |         |       | 288    | <b>2537</b> | <b>179</b> | 2536       | 179         |         |       |
| 766.femflow_r   | 288    | 385         | 1100       | <b>386</b> | <b>1100</b> |         |       | 288    | 385         | 1100       | <b>386</b> | <b>1100</b> |         |       |
| 767.nest_r      | 288    | 409         | 558        | <b>411</b> | <b>556</b>  |         |       | 288    | 397         | 576        | <b>397</b> | <b>576</b>  |         |       |
| 772.marian_r    | 288    | <b>625</b>  | <b>727</b> | 624        | 729         |         |       | 288    | <b>625</b>  | <b>727</b> | 624        | 729         |         |       |
| 782.lbm_r       | 288    | 990         | 167        | <b>991</b> | <b>167</b>  |         |       | 288    | 990         | 167        | <b>991</b> | <b>167</b>  |         |       |

SPECrate®2026\_fp\_base = **489**

SPECrate®2026\_fp\_peak = **502**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/mnt/ramdisk/cpu2026-RC2/lib"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 489

PowerEdge R770 (Intel Xeon 6780E)

SPECrate®2026\_fp\_peak = 502

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Nov-2025

## General Notes (Continued)

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc, a general purpose malloc implementation  
 built with the CentOS Stream 9, and the system compiler gcc 11.5.0  
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>  
 Benchmark run from a 160 GB ramdisk created with the cmd: "mount -t tmpfs -o size=160G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS Settings:

```

System Profile : Custom
CPU Power Management : Maximum Performance
C-States : Autonomous
Latency Optimized Mode : Enabled
Energy Efficient Policy : Performance

```

Sysinfo program /mnt/ramdisk/cpu2026-RC2/bin/sysinfo  
 Rev: 069f95da7e7f5d81b2ce48a82150e54f  
 running on W407216-R770 Wed Feb 4 20:34:40 2026

SUT (System Under Test) info as seen by some common utilities.

-----  
 Table of contents  
 -----

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 489

PowerEdge R770 (Intel Xeon 6780E)

SPECrate®2026\_fp\_peak = 502

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Nov-2025

## Platform Notes (Continued)

```
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

```
-----
1. uname -srvm
Linux 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09) x86_64
```

```
-----
2. w
 20:34:40 up 5:21, 1 user, load average: 61.72, 206.82, 250.38
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU WHAT
root      tty1     -             15:15      5:08m      2.18s    0.01s /bin/bash
/home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=7.0_T01 --output_format html, pdf, txt
```

```
-----
3. Username
From environment variable $USER: root
```

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4126060
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4126060
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 489

PowerEdge R770 (Intel Xeon 6780E)

SPECrate®2026\_fp\_peak = 502

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Nov-2025

## Platform Notes (Continued)

```

/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=7.0_T01 --output_format
html,pdf,txt
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=7.0_T01 --output_format
html,pdf,txt
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 288 -c
ic2025.3-sierraforest-cpu2026-0.902-rate-20260121.cfg --define smt-on --define peakfpcopies=144 --define
physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak -o all
--iterations 2 --define DL-VERS=7.0_T01 --output_format html,pdf,txt fprate
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 288 --configfile
ic2025.3-sierraforest-cpu2026-0.902-rate-20260121.cfg --define smt-on --define peakfpcopies=144 --define
physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
--output_format all --iterations 2 --define DL-VERS=7.0_T01 --output_format html,pdf,txt --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2026-RC2

```

### 6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) 6780E
vendor_id      : GenuineIntel
cpu family     : 6
model          : 175
stepping      : 3
microcode     : 0x3000382
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores     : 144
siblings      : 144

```

```

2 physical ids (chips)
288 processors (hardware threads)
physical id 0: core ids 0-143
physical id 1: core ids 0-143
physical id 0: apicids
0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72
, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130, 1
32, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 18
4, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230, 232, 234, 236
, 238, 240, 242, 244, 246, 248, 250, 252, 254, 256, 258, 260, 262, 264, 266, 268, 270, 272, 274, 276, 278, 280, 282, 284, 286
physical id 1: apicids
512, 514, 516, 518, 520, 522, 524, 526, 528, 530, 532, 534, 536, 538, 540, 542, 544, 546, 548, 550, 552, 554, 556, 558, 560, 562, 5
64, 566, 568, 570, 572, 574, 576, 578, 580, 582, 584, 586, 588, 590, 592, 594, 596, 598, 600, 602, 604, 606, 608, 610, 612, 614, 61
6, 618, 620, 622, 624, 626, 628, 630, 632, 634, 636, 638, 640, 642, 644, 646, 648, 650, 652, 654, 656, 658, 660, 662, 664, 666, 668
, 670, 672, 674, 676, 678, 680, 682, 684, 686, 688, 690, 692, 694, 696, 698, 700, 702, 704, 706, 708, 710, 712, 714, 716, 718, 720,
722, 724, 726, 728, 730, 732, 734, 736, 738, 740, 742, 744, 746, 748, 750, 752, 754, 756, 758, 760, 762, 764, 766, 768, 770, 772, 7
74, 776, 778, 780, 782, 784, 786, 788, 790, 792, 794, 796, 798

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 489

PowerEdge R770 (Intel Xeon 6780E)

SPECrate®2026\_fp\_peak = 502

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Nov-2025

## Platform Notes (Continued)

### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                288
On-line CPU(s) list:  0-287
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel
Model name:            Intel(R) Xeon(R) 6780E
BIOS Model name:      Intel(R) Xeon(R) 6780E  CPU @ 2.2GHz
BIOS CPU family:      179
CPU family:           6
Model:                175
Thread(s) per core:   1
Core(s) per socket:   144
Socket(s):            2
Stepping:              3
BogoMIPS:              4400.00

```

### Flags:

```

fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmlil avx2 smep bmi2 erms invpcid cqm
rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni lam wbnoinvd dtherm ida arat
pln pts vnmi umip pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
serialize pconfig arch_lbr ibt flush_lld arch_capabilities

```

### Virtualization:

```

VT-x
L1d cache:          9 MiB (288 instances)
L1i cache:          18 MiB (288 instances)
L2 cache:           288 MiB (72 instances)
L3 cache:           216 MiB (2 instances)
NUMA node(s):       2

```

### NUMA node0 CPU(s):

```

0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48
, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 489

PowerEdge R770 (Intel Xeon 6780E)

SPECrate®2026\_fp\_peak = 502

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Nov-2025

## Platform Notes (Continued)

,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236,238,240,242,244,246,248,250,252,254,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286

NUMA node1 CPU(s): 1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49,51,53,55,57,59,61,63,65,67,69,71,73,75,77,79,81,83,85,87,89,91,93,95,97,99,101,103,105,107,109,111,113,115,117,119,121,123,125,127,129,131,133,135,137,139,141,143,145,147,149,151,153,155,157,159,161,163,165,167,169,171,173,175,177,179,181,183,185,187,189,191,193,195,197,199,201,203,205,207,209,211,213,215,217,219,221,223,225,227,229,231,233,235,237,239,241,243,245,247,249,251,253,255,257,259,261,263,265,267,269,271,273,275,277,279,281,283,285,287

Vulnerability Gather data sampling: Not affected  
Vulnerability Itlb multihit: Not affected  
Vulnerability L1tf: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Reg file data sampling: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec rstack overflow: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI\_DIS\_S  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS   | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|--------|----------|----------------|
| L1d  | 32K      | 9M       | 8    | Data        | 1     | 64     | 1        | 64             |
| L1i  | 64K      | 18M      | 8    | Instruction | 1     | 128    | 1        | 64             |
| L2   | 4M       | 288M     | 16   | Unified     | 2     | 4096   | 1        | 64             |
| L3   | 108M     | 216M     | 12   | Unified     | 3     | 147456 | 1        | 64             |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus:

0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236,238,240,242,244,246,248,250,252,254,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 489

PowerEdge R770 (Intel Xeon 6780E)

SPECrate®2026\_fp\_peak = 502

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Nov-2025

## Platform Notes (Continued)

```

node 0 size: 515597 MB
node 0 free: 489220 MB
node 1 cpus:
1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49,51,53,55,57,59,61,63,65,67,69,71,73,7
5,77,79,81,83,85,87,89,91,93,95,97,99,101,103,105,107,109,111,113,115,117,119,121,123,125,127,129,131,133,1
35,137,139,141,143,145,147,149,151,153,155,157,159,161,163,165,167,169,171,173,175,177,179,181,183,185,187,
189,191,193,195,197,199,201,203,205,207,209,211,213,215,217,219,221,223,225,227,229,231,233,235,237,239,241
,243,245,247,249,251,253,255,257,259,261,263,265,267,269,271,273,275,277,279,281,283,285,287
node 1 size: 515944 MB
node 1 free: 512418 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10

```

```

-----
9. /proc/meminfo
   MemTotal:          1056298400 kB

```

```

-----
10. who -r
   run-level 3 Feb 4 15:14

```

```

-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
   Default Target   Status
   multi-user       running

```

```

-----
12. Services, from systemctl list-unit-files
   STATE          UNIT FILES
   enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
   issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
   smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
   enabled-runtime systemd-remount-fs
   disabled       autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
   chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
   firewallld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
   man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
   smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
   systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
   indirect       vncserver@
   systemd-userdbd wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
   BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 489

PowerEdge R770 (Intel Xeon 6780E)

SPECrate®2026\_fp\_peak = 502

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Nov-2025

## Platform Notes (Continued)

```

root=UUID=e81515a8-96ce-43a6-8780-d2ae771756fe
splash=silent
mitigations=auto
quiet
security=apparmor

```

```

-----
14. cpupower frequency-info
analyzing CPU 86:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                1

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 489

PowerEdge R770 (Intel Xeon 6780E)

SPECrate®2026\_fp\_peak = 502

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Nov-2025

## Platform Notes (Continued)

|                      |       |
|----------------------|-------|
| max_ptes_none        | 511   |
| max_ptes_shared      | 256   |
| max_ptes_swap        | 64    |
| pages_to_scan        | 4096  |
| scan_sleep_millisecs | 10000 |

### 18. OS release

From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP6

### 19. Disk information

SPEC is set to: /mnt/ramdisk/cpu2026-RC2  
Filesystem Type Size Used Avail Use% Mounted on  
tmpfs tmpfs 160G 13G 148G 9% /mnt/ramdisk

### 20. /sys/devices/virtual/dmi/id

Vendor: Dell Inc.  
Product: PowerEdge R770  
Product Family: PowerEdge  
Serial: W407216

### 21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
6x 00AD042300AD HMC94AHBRA480N 64 GB 2 rank 6400  
10x 00AD063200AD HMC94AHBRA277N 64 GB 2 rank 6400

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.  
BIOS Version: 1.6.4  
BIOS Date: 11/02/2025  
BIOS Revision: 1.6



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 489

PowerEdge R770 (Intel Xeon 6780E)

SPECrate®2026\_fp\_peak = 502

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Nov-2025

## Compiler Version Notes

=====  
C | 782.lbm\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 731.astcenc\_r(base, peak) 736.ocio\_r(base, peak)  
| 748.flightdm\_r(base, peak) 766.femflow\_r(base, peak)  
| 767.nest\_r(base, peak) 772.marian\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 709.cactus\_r(base, peak) 737.gmsh\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 722.palm\_r(base, peak) 749.fotonik3d\_r(base, peak) 765.roms\_r(base,  
| peak)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 489

PowerEdge R770 (Intel Xeon 6780E)

SPECrate®2026\_fp\_peak = 502

CPU2026 License: 6573

Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Nov-2025

## Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

## Base Portability Flags

```
709.cactus_r: -DSPEC_LP64
722.palm_r: -DSPEC_LP64
731.ascenc_r: -DSPEC_LP64
736.ocio_r: -DSPEC_LP64
737.gmsh_r: -DSPEC_LP64 -fno-associative-math
748.flightdm_r: -DSPEC_LP64
749.fotonik3d_r: -DSPEC_LP64
765.roms_r: -DSPEC_LP64
766.femflow_r: -DSPEC_LP64
767.nest_r: -DSPEC_LP64
772.marian_r: -DSPEC_LP64
782.lbm_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c18 -Wl,-z,muldefs -xsierraforest -O3 -ffp-model=fast
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -std=c++17 -Wl,-z,muldefs -xsierraforest -O3 -ffp-model=fast
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -stand f18 -Wl,-z,muldefs -xsierraforest -O3 -ffp-model=fast
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xsierraforest -O3
-ffp-model=fast -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 489

PowerEdge R770 (Intel Xeon 6780E)

SPECrate®2026\_fp\_peak = 502

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Nov-2025

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both C and C++:

icpx icx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

782.lbm\_r: basepeak = yes

C++ benchmarks:

731.astcenc\_r: -m64 -std=c++17 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-ffp-model=fast -xsierraforest(pass 2) -flto  
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

736.ocio\_r: basepeak = yes

748.flightdm\_r: Same as 731.astcenc\_r

766.femflow\_r: basepeak = yes

767.nest\_r: Same as 731.astcenc\_r

772.marian\_r: basepeak = yes

Fortran benchmarks:

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_fp\_base = 489

PowerEdge R770 (Intel Xeon 6780E)

SPECrate®2026\_fp\_peak = 502

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Nov-2025

## Peak Optimization Flags (Continued)

722.palm\_r: basepeak = yes

749.fotonik3d\_r: basepeak = yes

765.roms\_r: basepeak = yes

Benchmarks using both C and C++:

709.cactus\_r: basepeak = yes

```
737.gmsh_r: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-ffp-model=fast -xsierraforest(pass 2) -flto
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.html>

<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.xml>

<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-04 21:34:39-0500.

Report generated on 2026-05-11 16:38:27 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.