



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

## PowerEdge R770 (Intel Xeon 6787P)

SPECrate®2026\_fp\_base = 474

SPECrate®2026\_fp\_energy\_base = 47.6

SPECrate®2026\_fp\_peak = 488

SPECrate®2026\_fp\_energy\_peak = 49.0

CPU2026 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Nov-2025

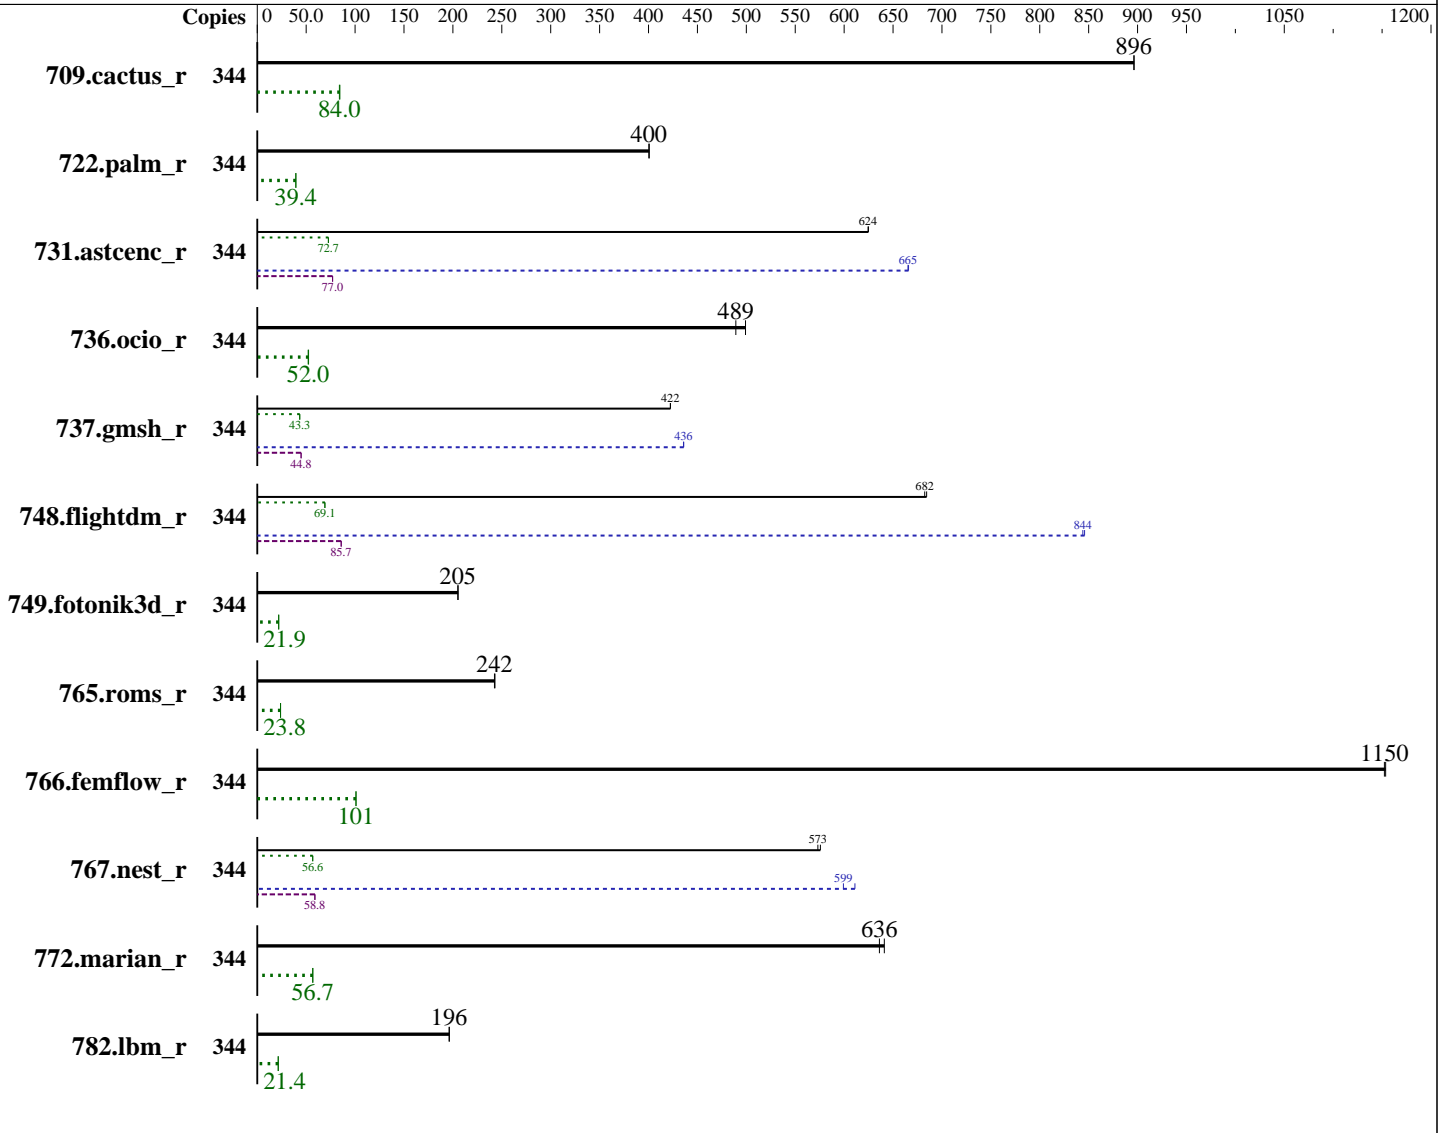

### Hardware

CPU Name: Intel Xeon 6787P  
 Max MHz: 3800  
 Nominal: 2000  
 Enabled: 172 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 64 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 336 MB I+D on chip per chip

(Continued on next page)

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 6.4.0-150600.21-default  
 Compiler: C/C++: Version 2025.3 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2025.3 of Intel Fortran  
 Compiler for Linux  
 Compiler Category: Vendor  
 Firmware: Version 1.6.4 released Nov-2025

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

## PowerEdge R770 (Intel Xeon 6787P)

SPECrate®2026\_fp\_base = 474  
 SPECrate®2026\_fp\_energy\_base = 47.6  
 SPECrate®2026\_fp\_peak = 488  
 SPECrate®2026\_fp\_energy\_peak = 49.0

CPU2026 License: 6573  
 Test Sponsor: Dell Inc.  
 Tested by: Dell Inc.

Test Date: Feb-2026  
 Hardware Availability: Mar-2025  
 Software Availability: Nov-2025

### Hardware (Continued)

Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)  
 Storage: 190 GB on tmpfs  
 Cooling: Air  
 Other: CPU Cooling : Air

### Software (Continued)

File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator v5.3  
 Power Management: BIOS and OS set to balanced performance

### Power

Max. Power (W): 1065.2  
 Idle Power (W): 217.13  
 Min. Temperature (C): 22.31  
 Elevation (m): 255  
 Line Standard: 220 V / 50 Hz / 1 phase / 3 wires  
 Provisioning: Line-powered

### Power Settings

Management FW: Version 1.20.80.50 of IDRAC  
 Memory Mode: Normal

### Power-Relevant Hardware

Power Supply: 1 x 1500 W (non-redundant)  
 Details: 1500W Titanium Power supply DPN 1PKMH  
 Backplane: 8 x EDSFF E3.S NVMe  
 Other Storage: 1 x NVMe E3 Drive  
 Storage Model #s: NVMe PM1745 MU E3.S 3.2TB  
 NICs Installed: 1 x Intel E610-XT2 @ 10 Gbps (Dell P/N FC0HK)  
 NICs Enabled (FW/OS): 2 / 1  
 NICs Connected/Speed: 1 @ 10 Gb  
 Other HW Model #s: 6 x performance fans

### Power Analyzer

Power Analyzer: 192.168.0.5:8888  
 Hardware Vendor: Yokogawa Meters and Instruments Corporation  
 Model: YokogawaWT310E  
 Serial Number: T11733386  
 Input Connection: Default  
 Metrology Institute: Tescom  
 Calibration By: NIST  
 Calibration Label: T126623  
 Calibration Date: 13-Aug-2025  
 PTDaemon® Version: 1.11.4 (5bcc369b; 2026-01-19)  
 Setup Description: Connected to PSU1  
 Current Ranges Used: 10A  
 Voltage Range Used: 300V

### Temperature Meter

Temperature Meter: 192.168.0.5:8889  
 Hardware Vendor: Digi International Inc.  
 Model: DigiWATCHPORT\_H  
 Serial Number: W13370940  
 Input Connection: USB  
 PTDaemon Version: 1.11.4 (5bcc369b; 2026-01-19)  
 Setup Description: 25 mm in front of SUT main airflow intake

## Base Results Table

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
709.cactus_r	344	329	897	297	84.5	902	983	<b>329</b>	<b>896</b>	<b>299</b>	<b>84.0</b>	<b>907</b>	<b>983</b>						
722.palm_r	344	1133	401	977	39.4	863	930	<b>1134</b>	<b>400</b>	<b>977</b>	<b>39.4</b>	<b>862</b>	<b>924</b>						
731.ascenc_r	344	<b>463</b>	<b>624</b>	<b>331</b>	<b>72.7</b>	<b>716</b>	<b>756</b>	462	625	331	72.7	717	758						

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

## PowerEdge R770 (Intel Xeon 6787P)

SPECrate®2026\_fp\_base = 474  
 SPECrate®2026\_fp\_energy\_base = 47.6  
 SPECrate®2026\_fp\_peak = 488  
 SPECrate®2026\_fp\_energy\_peak = 49.0

CPU2026 License: 6573  
 Test Sponsor: Dell Inc.  
 Tested by: Dell Inc.

Test Date: Feb-2026  
 Hardware Availability: Mar-2025  
 Software Availability: Nov-2025

### Base Results Table (Continued)

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
736.ocio_r	344	603	499	481	52.4	797	875	<b>615</b>	<b>489</b>	<b>484</b>	<b>52.0</b>	<b>787</b>	<b>878</b>						
737.gmsh_r	344	<b>374</b>	<b>422</b>	<b>305</b>	<b>43.3</b>	<b>817</b>	<b>889</b>	374	422	304	43.5	814	884						
748.flightdm_r	344	360	684	299	69.2	831	855	<b>361</b>	<b>682</b>	<b>299</b>	<b>69.1</b>	<b>830</b>	<b>856</b>						
749.fotonik3d_r	344	1936	205	1550	21.9	799	817	<b>1940</b>	<b>205</b>	<b>1550</b>	<b>21.9</b>	<b>800</b>	<b>1010</b>						
765.roms_r	344	<b>2234</b>	<b>242</b>	<b>1990</b>	<b>23.8</b>	<b>891</b>	<b>909</b>	2229	243	1990	23.8	892	1070						
766.femflow_r	344	437	1150	424	101	968	1000	<b>438</b>	<b>1150</b>	<b>423</b>	<b>101</b>	<b>967</b>	<b>1000</b>						
767.nest_r	344	474	576	401	56.7	845	913	<b>476</b>	<b>573</b>	<b>401</b>	<b>56.6</b>	<b>843</b>	<b>913</b>						
772.marian_r	344	<b>854</b>	<b>636</b>	<b>805</b>	<b>56.7</b>	<b>943</b>	<b>1000</b>	847	641	803	56.8	947	998						
782.lbm_r	344	<b>1005</b>	<b>196</b>	<b>819</b>	<b>21.4</b>	<b>815</b>	<b>825</b>	1004	196	819	21.4	816	826						

SPECrate®2026\_fp\_base = 474

SPECrate®2026\_fp\_energy\_base = 47.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Peak Results Table

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
709.cactus_r	344	329	897	297	84.5	902	983	<b>329</b>	<b>896</b>	<b>299</b>	<b>84.0</b>	<b>907</b>	<b>983</b>						
722.palm_r	344	1133	401	977	39.4	863	930	<b>1134</b>	<b>400</b>	<b>977</b>	<b>39.4</b>	<b>862</b>	<b>924</b>						
731.ascenc_r	344	434	666	313	77.0	721	752	<b>434</b>	<b>665</b>	<b>313</b>	<b>77.0</b>	<b>721</b>	<b>752</b>						
736.ocio_r	344	603	499	481	52.4	797	875	<b>615</b>	<b>489</b>	<b>484</b>	<b>52.0</b>	<b>787</b>	<b>878</b>						
737.gmsh_r	344	362	436	295	44.8	815	884	<b>362</b>	<b>436</b>	<b>296</b>	<b>44.8</b>	<b>816</b>	<b>884</b>						
748.flightdm_r	344	291	846	241	85.9	827	846	<b>292</b>	<b>844</b>	<b>241</b>	<b>85.7</b>	<b>828</b>	<b>846</b>						
749.fotonik3d_r	344	1936	205	1550	21.9	799	817	<b>1940</b>	<b>205</b>	<b>1550</b>	<b>21.9</b>	<b>800</b>	<b>1010</b>						
765.roms_r	344	<b>2234</b>	<b>242</b>	<b>1990</b>	<b>23.8</b>	<b>891</b>	<b>909</b>	2229	243	1990	23.8	892	1070						
766.femflow_r	344	437	1150	424	101	968	1000	<b>438</b>	<b>1150</b>	<b>423</b>	<b>101</b>	<b>967</b>	<b>1000</b>						
767.nest_r	344	<b>455</b>	<b>599</b>	<b>387</b>	<b>58.8</b>	<b>850</b>	<b>935</b>	446	611	385	59.0	862	934						
772.marian_r	344	<b>854</b>	<b>636</b>	<b>805</b>	<b>56.7</b>	<b>943</b>	<b>1000</b>	847	641	803	56.8	947	998						
782.lbm_r	344	<b>1005</b>	<b>196</b>	<b>819</b>	<b>21.4</b>	<b>815</b>	<b>825</b>	1004	196	819	21.4	816	826						

SPECrate®2026\_fp\_peak = 488

SPECrate®2026\_fp\_energy\_peak = 49.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/mnt/ramdisk/cpu2026rc2/lib"

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R770 (Intel Xeon 6787P)

SPECrate®2026_fp_base =	474
SPECrate®2026_fp_energy_base =	47.6
SPECrate®2026_fp_peak =	488
SPECrate®2026_fp_energy_peak =	49.0

CPU2026 License: 6573  
 Test Sponsor: Dell Inc.  
 Tested by: Dell Inc.

Test Date: Feb-2026  
 Hardware Availability: Mar-2025  
 Software Availability: Nov-2025

## Environment Variables Notes (Continued)

MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.  
 Transparent Huge Pages enabled by default  
 Prior to runcpu invocation  
 Filesystem page cache synced and cleared with:  
 sync; echo 3> /proc/sys/vm/drop\_caches  
 runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>  
 jemalloc, a general purpose malloc implementation  
 built with the CentOS Stream 9, and the system compiler gcc 11.5.0  
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>  
 Benchmark run from a 190 GB ramdisk created with the cmd: "mount -t tmpfs -o size=190G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS Settings:  
 BIOS System profile set to Performance per watt (OS)  
 Memory Frequency set to 5200

Sysinfo program /mnt/ramdisk/cpu2026rc2/bin/sysinfo  
 Rev: 069f95da7e7f5d81b2ce48a82150e54f  
 running on B2KQ54-R770 Sun Feb 8 12:00:05 2026

SUT (System Under Test) info as seen by some common utilities.

-----  
 Table of contents  
 -----

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R770 (Intel Xeon 6787P)

SPECrate®2026_fp_base =	474
SPECrate®2026_fp_energy_base =	47.6
SPECrate®2026_fp_peak =	488
SPECrate®2026_fp_energy_peak =	49.0

CPU2026 License: 6573  
 Test Sponsor: Dell Inc.  
 Tested by: Dell Inc.

Test Date: Feb-2026  
 Hardware Availability: Mar-2025  
 Software Availability: Nov-2025

## Platform Notes (Continued)

```

10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
  
```

```

-----
1. uname -srvm
Linux 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09) x86_64
  
```

```

-----
2. w
12:00:05 up 13 min, 1 user, load average: 0.71, 0.59, 0.75
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1    -              11:48   60.00s  3.77s  0.05s  /bin/bash
/home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=7.0_T01 --output_format html,pdf,txt
  
```

```

-----
3. Username
From environment variable $USER: root
  
```

```

-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4126008
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
  
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

## PowerEdge R770 (Intel Xeon 6787P)

SPECrate®2026_fp_base =	474
SPECrate®2026_fp_energy_base =	47.6
SPECrate®2026_fp_peak =	488
SPECrate®2026_fp_energy_peak =	49.0

**CPU2026 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Mar-2025  
**Software Availability:** Nov-2025

### Platform Notes (Continued)

```
max user processes      (-u) 4126008
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

#### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=7.0_T01 --output_format
html, pdf, txt
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=7.0_T01 --output_format
html, pdf, txt
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 344 -c
ic2025.3-graniterapids-cpu2026-0.902-rate-20260121.cfg --define smt-on --define cores=172 --define
physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2
--define DL-VERS=7.0_T01 --output_format html, pdf, txt fprate
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 344 --configfile
ic2025.3-graniterapids-cpu2026-0.902-rate-20260121.cfg --define smt-on --define cores=172 --define
physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all
--iterations 2 --define DL-VERS=7.0_T01 --output_format html, pdf, txt --runmode rate --tune base:peak
--size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2026rc2
```

#### 6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6787P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 173
stepping        : 1
microcode       : 0x10003f3
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores       : 86
siblings        : 172
2 physical ids (chips)
344 processors (hardware threads)
physical id 0:  core ids 0-42,64-106
physical id 1:  core ids 0-42,64-106
physical id 0:  apicids 0-85,128-213
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R770 (Intel Xeon 6787P)

SPECrate®2026_fp_base =	474
SPECrate®2026_fp_energy_base =	47.6
SPECrate®2026_fp_peak =	488
SPECrate®2026_fp_energy_peak =	49.0

CPU2026 License: 6573  
 Test Sponsor: Dell Inc.  
 Tested by: Dell Inc.

Test Date: Feb-2026  
 Hardware Availability: Mar-2025  
 Software Availability: Nov-2025

## Platform Notes (Continued)

physical id 1: apicids 256-341,384-469

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                       344
On-line CPU(s) list:         0-343
Vendor ID:                    GenuineIntel
BIOS Vendor ID:              Intel
Model name:                   Intel(R) Xeon(R) 6787P
BIOS Model name:              Intel(R) Xeon(R) 6787P  CPU @ 2.0GHz
BIOS CPU family:              179
CPU family:                   6
Model:                        173
Thread(s) per core:           2
Core(s) per socket:           86
Socket(s):                    2
Stepping:                     1
BogoMIPS:                     4000.00

```

```

Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                             pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                             nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                             pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr
                             pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
                             aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
                             cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                             ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms
                             invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                             clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
                             xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                             cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16
                             wbnoinvd dtherm arat pln pts avx512vbmi umip pku ospke waitpkg
                             avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                             avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri
                             movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr
                             ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                             arch_capabilities

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

## PowerEdge R770 (Intel Xeon 6787P)

SPECrate®2026\_fp\_base = 474  
 SPECrate®2026\_fp\_energy\_base = 47.6  
 SPECrate®2026\_fp\_peak = 488  
 SPECrate®2026\_fp\_energy\_peak = 49.0

**CPU2026 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Mar-2025  
**Software Availability:** Nov-2025

### Platform Notes (Continued)

```

L1d cache:          8.1 MiB (172 instances)
L1i cache:          10.8 MiB (172 instances)
L2 cache:           344 MiB (172 instances)
L3 cache:           672 MiB (2 instances)
NUMA node(s):       4
NUMA node0 CPU(s): 0-42,172-214
NUMA node1 CPU(s): 43-85,215-257
NUMA node2 CPU(s): 86-128,258-300
NUMA node3 CPU(s): 129-171,301-343
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability L1tf:                 Not affected
Vulnerability Mds:                   Not affected
Vulnerability Meltdown:              Not affected
Vulnerability Mmio stale data:       Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:               Not affected
Vulnerability Spec rstack overflow:   Not affected
Vulnerability Spec store bypass:     Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                        PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:                 Not affected
Vulnerability Tsx async abort:        Not affected
  
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	8.1M	12	Data	1	64	1	64
L1i	64K	10.8M	16	Instruction	1	64	1	64
L2	2M	344M	16	Unified	2	2048	1	64
L3	336M	672M	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-42,172-214
node 0 size: 257568 MB
node 0 free: 229993 MB
node 1 cpus: 43-85,215-257
node 1 size: 258025 MB
node 1 free: 256986 MB
node 2 cpus: 86-128,258-300
node 2 size: 257986 MB
node 2 free: 257191 MB
  
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

## PowerEdge R770 (Intel Xeon 6787P)

SPECrate®2026\_fp\_base = 474  
 SPECrate®2026\_fp\_energy\_base = 47.6  
 SPECrate®2026\_fp\_peak = 488  
 SPECrate®2026\_fp\_energy\_peak = 49.0

**CPU2026 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Mar-2025  
**Software Availability:** Nov-2025

### Platform Notes (Continued)

```
node 3 cpus: 129-171,301-343
node 3 size: 257947 MB
node 3 free: 257221 MB
node distances:
node  0  1  2  3
  0:  10  12  21  21
  1:  12  10  21  21
  2:  21  21  10  12
  3:  21  21  12  10
```

```
-----
9. /proc/meminfo
   MemTotal:      1056285056 kB
```

```
-----
10. who -r
    run-level 3 Feb 8 11:48
```

```
-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
    Default Target   Status
    multi-user       running
```

```
-----
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
                issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
                nvmmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
                wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled       autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                firewallld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
                man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
                smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
                systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
                vncserver@
indirect       systemd-userdbd wickedd
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=02b3adac-b4ec-425b-b06d-e66675474f80
splash=silent
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R770 (Intel Xeon 6787P)

SPECrate®2026_fp_base =	474
SPECrate®2026_fp_energy_base =	47.6
SPECrate®2026_fp_peak =	488
SPECrate®2026_fp_energy_peak =	49.0

CPU2026 License: 6573  
 Test Sponsor: Dell Inc.  
 Tested by: Dell Inc.

Test Date: Feb-2026  
 Hardware Availability: Mar-2025  
 Software Availability: Nov-2025

## Platform Notes (Continued)

```
mitigations=auto
quiet
security=apparmor
```

```
-----
14. cpupower frequency-info
analyzing CPU 231:
  Unable to determine current policy
  boost state support:
    Supported: no
    Active: no
```

```
-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvise [madvise] never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R770 (Intel Xeon 6787P)

SPECrate®2026_fp_base =	474
SPECrate®2026_fp_energy_base =	47.6
SPECrate®2026_fp_peak =	488
SPECrate®2026_fp_energy_peak =	49.0

CPU2026 License: 6573  
 Test Sponsor: Dell Inc.  
 Tested by: Dell Inc.

Test Date: Feb-2026  
 Hardware Availability: Mar-2025  
 Software Availability: Nov-2025

## Platform Notes (Continued)

```
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

### 18. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
```

### 19. Disk information

```
SPEC is set to: /mnt/ramdisk/cpu2026rc2
Filesystem      Type      Size      Used Avail Use% Mounted on
tmpfs           tmpfs     190G      13G  178G   7% /mnt/ramdisk
```

### 20. /sys/devices/virtual/dmi/id

```
Vendor:          Dell Inc.
Product:         PowerEdge R770
Product Family: PowerEdge
Serial:          5B2KQ54
```

### 21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
  16x 002C069D002C MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400, configured at 5200
```

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      Dell Inc.
BIOS Version:     1.6.4
BIOS Date:        11/02/2025
BIOS Revision:    1.6
```



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R770 (Intel Xeon 6787P)

SPECrate®2026_fp_base =	474
SPECrate®2026_fp_energy_base =	47.6
SPECrate®2026_fp_peak =	488
SPECrate®2026_fp_energy_peak =	49.0

CPU2026 License: 6573  
 Test Sponsor: Dell Inc.  
 Tested by: Dell Inc.

Test Date: Feb-2026  
 Hardware Availability: Mar-2025  
 Software Availability: Nov-2025

## Compiler Version Notes

```
=====
C      | 782.lbm_r(base, peak)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
-----
```

```
=====
C++    | 731.astcenc_r(base, peak) 736.ocio_r(base, peak)
      | 748.flightdm_r(base, peak) 766.femflow_r(base, peak)
      | 767.nest_r(base, peak) 772.marian_r(base, peak)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C | 709.cactus_r(base, peak) 737.gmsh_r(base, peak)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran | 722.palm_r(base, peak) 749.fotonik3d_r(base, peak) 765.roms_r(base,
      | peak)
-----
```

```
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
-----
```

## Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R770 (Intel Xeon 6787P)

SPECrate®2026_fp_base =	474
SPECrate®2026_fp_energy_base =	47.6
SPECrate®2026_fp_peak =	488
SPECrate®2026_fp_energy_peak =	49.0

CPU2026 License: 6573  
 Test Sponsor: Dell Inc.  
 Tested by: Dell Inc.

Test Date: Feb-2026  
 Hardware Availability: Mar-2025  
 Software Availability: Nov-2025

## Base Compiler Invocation (Continued)

Fortran benchmarks:  
ifx

Benchmarks using both C and C++:  
icpx icx

## Base Portability Flags

```
709.cactus_r: -DSPEC_LP64
722.palm_r: -DSPEC_LP64
731.ascenc_r: -DSPEC_LP64
736.ocio_r: -DSPEC_LP64
737.gmsh_r: -DSPEC_LP64 -fno-associative-math
748.flightdm_r: -DSPEC_LP64
749.fotonik3d_r: -DSPEC_LP64
765.roms_r: -DSPEC_LP64
766.femflow_r: -DSPEC_LP64
767.nest_r: -DSPEC_LP64
772.marian_r: -DSPEC_LP64
782.lbm_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:  
 -m64 -std=c18 -Wl,-z,muldefs -xgraniterapids  
 -mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse  
 -funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib  
 -ljemalloc

C++ benchmarks:  
 -m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids  
 -mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse  
 -funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib  
 -ljemalloc

Fortran benchmarks:  
 -m64 -stand f18 -Wl,-z,muldefs -xgraniterapids  
 -mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse  
 -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R770 (Intel Xeon 6787P)

SPECrate®2026\_fp\_base = 474

SPECrate®2026\_fp\_energy\_base = 47.6

SPECrate®2026\_fp\_peak = 488

SPECrate®2026\_fp\_energy\_peak = 49.0

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Nov-2025

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-align array32byte -auto -L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xgraniterapids  
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib  
-ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both C and C++:

```
icpx icx
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
782.lbm_r: basepeak = yes
```

C++ benchmarks:

```
731.astcenc_r: -m64 -std=c++17 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xHost(pass 1)
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R770 (Intel Xeon 6787P)

SPECrate®2026_fp_base =	474
SPECrate®2026_fp_energy_base =	47.6
SPECrate®2026_fp_peak =	488
SPECrate®2026_fp_energy_peak =	49.0

CPU2026 License: 6573  
 Test Sponsor: Dell Inc.  
 Tested by: Dell Inc.

Test Date: Feb-2026  
 Hardware Availability: Mar-2025  
 Software Availability: Nov-2025

## Peak Optimization Flags (Continued)

731.astcenc\_r (continued):  
 -ffp-model=fast -xgraniterapids(pass 2) -flto  
 -mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3  
 -mfpmath=sse -funroll-loops  
 -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

736.ocio\_r: basepeak = yes

748.flightdm\_r: Same as 731.astcenc\_r

766.femflow\_r: basepeak = yes

767.nest\_r: Same as 731.astcenc\_r

772.marian\_r: basepeak = yes

Fortran benchmarks:

722.palm\_r: basepeak = yes

749.fotonik3d\_r: basepeak = yes

765.roms\_r: basepeak = yes

Benchmarks using both C and C++:

709.cactus\_r: basepeak = yes

737.gmsh\_r: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs  
 -fprofile-generate(pass 1)  
 -fprofile-use=default.profddata(pass 2) -xHost(pass 1)  
 -ffp-model=fast -xgraniterapids(pass 2) -flto  
 -mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3  
 -mfpmath=sse -funroll-loops  
 -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.html>  
<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.xml>  
<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.xml>



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R770 (Intel Xeon 6787P)

SPECrate®2026\_fp\_base = 474

SPECrate®2026\_fp\_energy\_base = 47.6

SPECrate®2026\_fp\_peak = 488

SPECrate®2026\_fp\_energy\_peak = 49.0

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Nov-2025

PTDaemon, SPEC CPU, and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-08 13:00:03-0500.

Report generated on 2026-05-04 23:28:56 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.