



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026_fp_base = 900

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026_fp_peak = 925

CPU2026 License: 6573


Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2025

Tested by: Dell Inc.

Software Availability: Nov-2025

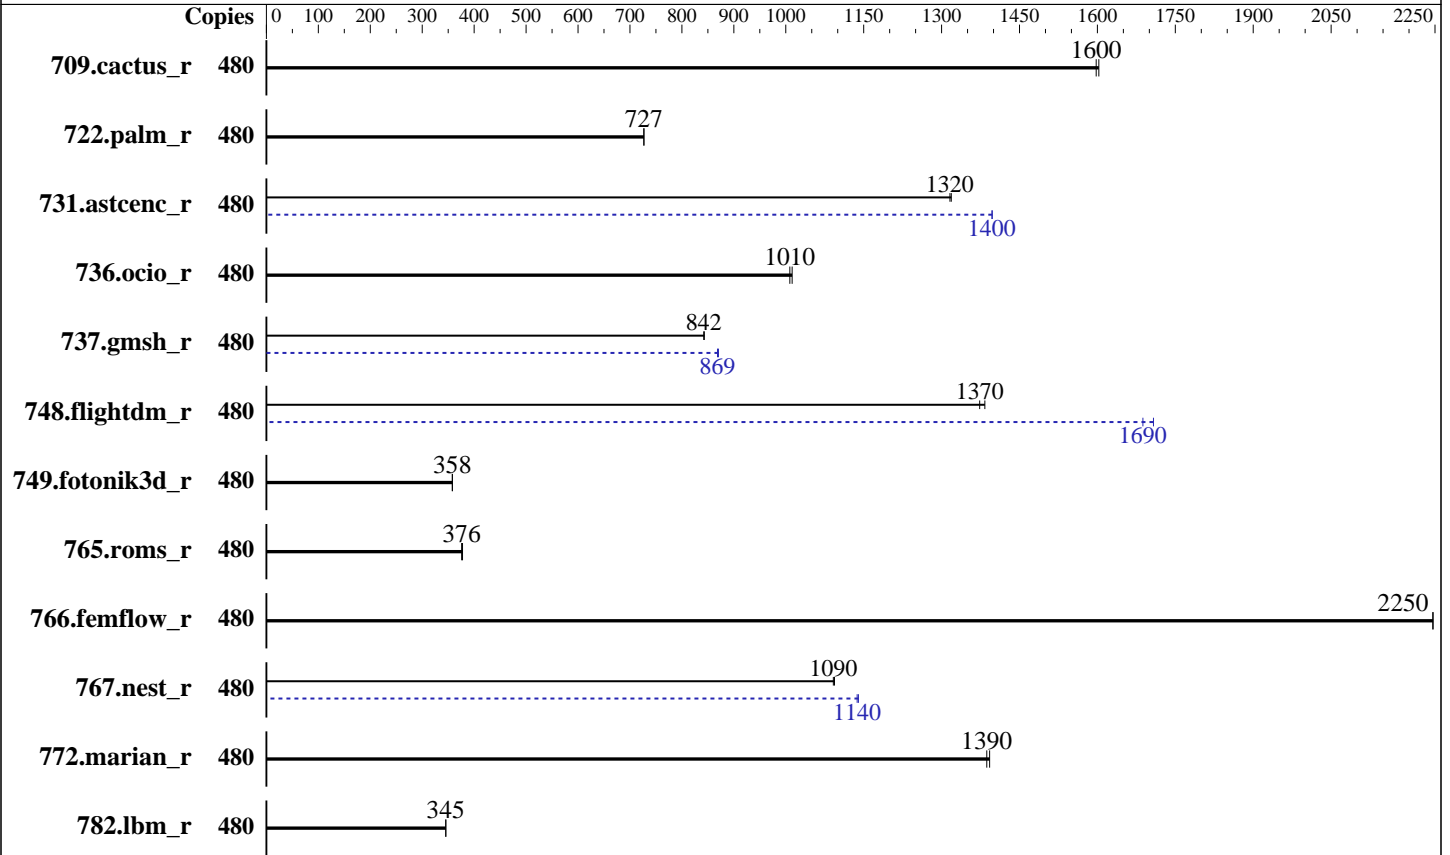

Hardware

CPU Name: Intel Xeon 6978P
 Max MHz: 3900
 Nominal: 2100
 Enabled: 240 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 504 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 240 GB on tmpfs
 Cooling: Air
 Other: None

Software

OS: SUSE Linux Enterprise Server 16.0
 6.12.0-160000.5-default
 Compiler: C/C++: Version 2025.3 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2025.3 of Intel Fortran
 Compiler for Linux
 Compiler Category: Vendor
 Firmware: Version 1.1.6 released Nov-2025
 File System: tmpfs
 System State: Run level 5 (graphical multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator v5.3
 Power Management: BIOS set to prefer performance at the cost of
 additional power usage.



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026_fp_base = 900

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026_fp_peak = 925

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|--------|--------------------|--------------------|-------------------|--------------------|---------|-------|--------|--------------------|--------------------|-------------------|--------------------|---------|-------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 709.cactus_r | 480 | <u>258</u> | <u>1600</u> | 257 | 1600 | | | 480 | <u>258</u> | <u>1600</u> | 257 | 1600 | | |
| 722.palm_r | 480 | 871 | 727 | <u>872</u> | <u>727</u> | | | 480 | 871 | 727 | <u>872</u> | <u>727</u> | | |
| 731.ascenc_r | 480 | <u>306</u> | <u>1320</u> | 306 | 1320 | | | 480 | <u>289</u> | <u>1400</u> | 288 | 1400 | | |
| 736.ocio_r | 480 | 415 | 1010 | <u>417</u> | <u>1010</u> | | | 480 | 415 | 1010 | <u>417</u> | <u>1010</u> | | |
| 737.gmsh_r | 480 | <u>262</u> | <u>842</u> | 261 | 843 | | | 480 | <u>254</u> | <u>869</u> | 253 | 870 | | |
| 748.flightdm_r | 480 | 248 | 1380 | <u>250</u> | <u>1370</u> | | | 480 | <u>204</u> | <u>1690</u> | 201 | 1710 | | |
| 749.fotonik3d_r | 480 | <u>1550</u> | <u>358</u> | 1550 | 358 | | | 480 | <u>1550</u> | <u>358</u> | 1550 | 358 | | |
| 765.roms_r | 480 | <u>2011</u> | <u>376</u> | 2002 | 378 | | | 480 | <u>2011</u> | <u>376</u> | 2002 | 378 | | |
| 766.femflow_r | 480 | 313 | 2250 | <u>314</u> | <u>2250</u> | | | 480 | 313 | 2250 | <u>314</u> | <u>2250</u> | | |
| 767.nest_r | 480 | <u>349</u> | <u>1090</u> | 348 | 1090 | | | 480 | <u>335</u> | <u>1140</u> | 334 | 1140 | | |
| 772.marian_r | 480 | <u>546</u> | <u>1390</u> | 544 | 1390 | | | 480 | <u>546</u> | <u>1390</u> | 544 | 1390 | | |
| 782.lbm_r | 480 | <u>796</u> | <u>345</u> | 796 | 346 | | | 480 | <u>796</u> | <u>345</u> | 796 | 346 | | |

SPECrate®2026_fp_base = 900

SPECrate®2026_fp_peak = 925

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu2026rc2/lib"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026_fp_base = 900

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026_fp_peak = 925

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Nov-2025

General Notes (Continued)

```

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the CentOS Stream 9, and the system compiler gcc 11.5.0
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
Benchmark run from a 240 GB ramdisk created with the cmd: "mount -t tmpfs -o size=240G tmpfs /mnt/ramdisk"

```

Platform Notes

BIOS Settings:

Sub NUMA Cluster : Enabled

System Profile : Custom

CPU Power Management : Maximum Performance

C-States : Autonomous

Latency Optimized Mode : Enabled

Energy Efficient Policy : Performance

Sysinfo program /mnt/ramdisk/cpu2026rc2/bin/sysinfo

Rev: 069f95da7e7f5d81b2ce48a82150e54f

running on R7701AP-R770AP Thu Feb 5 16:41:32 2026

SUT (System Under Test) info as seen by some common utilities.

```

-----
Table of contents
-----

```

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)
11. Services, from systemctl list-unit-files
12. Linux kernel boot-time arguments, from /proc/cmdline
13. cpupower frequency-info
14. sysctl
15. /sys/kernel/mm/transparent_hugepage
16. /sys/kernel/mm/transparent_hugepage/khugepaged
17. OS release
18. Disk information

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026_fp_base = 900

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026_fp_peak = 925

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Platform Notes (Continued)

19. /sys/devices/virtual/dmi/id
20. dmidecode
21. BIOS

1. uname -srvm
Linux 6.12.0-160000.5-default #1 SMP PREEMPT_DYNAMIC Wed Sep 10 15:26:25 UTC 2025 (3545bbd) x86_64

2. w
16:41:32 up 5:06, 1 user, load average: 186.84, 391.74, 433.35
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 11:37 5:02m 1.44s ? /bin/bash
/home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=7.0_T01 --output_format html, pdf, txt

3. Username
From environment variable \$USER: root

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 6189327
max locked memory (kbytes, -l) 8192
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 6189327
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=47
login -- root
-bash
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026_fp_base = 900

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026_fp_peak = 925

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Platform Notes (Continued)

```

/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=7.0_T01 --output_format
html,pdf,txt
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=7.0_T01 --output_format
html,pdf,txt
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 480 -c
ic2025.3-graniterapids-cpu2026-0.902-rate-20260121.cfg --define smt-on --define cores=240 --define
physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2
--define DL-VERS=7.0_T01 --output_format html,pdf,txt fprate
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 480 --configfile
ic2025.3-graniterapids-cpu2026-0.902-rate-20260121.cfg --define smt-on --define cores=240 --define
physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all
--iterations 2 --define DL-VERS=7.0_T01 --output_format html,pdf,txt --nopower --runmode rate --tune
base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2026rc2

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6978P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x10003f3
bugs           : spectre_v1 spectre_v2 spec_store_bypass swags bhi spectre_v2_user
cpu cores      : 120
siblings       : 240
2 physical ids (chips)
480 processors (hardware threads)
physical id 0: core ids 0-39,64-103,128-167
physical id 1: core ids 0-39,64-103,128-167
physical id 0: apicids 0-79,128-207,256-335
physical id 1: apicids 512-591,640-719,768-847

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```

From lscpu from util-linux 2.41.1:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:     52 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            480

```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026_fp_base = 900

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026_fp_peak = 925

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Platform Notes (Continued)

```

On-line CPU(s) list:          0-479
Vendor ID:                    GenuineIntel
Model name:                   Intel(R) Xeon(R) 6978P
CPU family:                   6
Model:                        173
Thread(s) per core:          2
Core(s) per socket:          120
Socket(s):                    2
Stepping:                     1
BogoMIPS:                     4200.00
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                               pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                               pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                               nopl xtopology nonstop_tsc cpuid aperfperf tsc_known_freq pni
                               pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma
                               cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                               tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                               3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin
                               cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                               flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep
                               bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                               avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
                               avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                               cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni
                               avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi vnmi avx512vbmi
                               umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                               avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
                               bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                               serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
                               amx_tile amx_int8 flush_lld arch_capabilities
Virtualization:               VT-x
L1d cache:                    11.3 MiB (240 instances)
L1i cache:                    15 MiB (240 instances)
L2 cache:                     480 MiB (240 instances)
L3 cache:                     1008 MiB (2 instances)
NUMA node(s):                 6
NUMA node0 CPU(s):            0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46
                               , 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 240, 242, 244, 246, 2
                               48, 250, 252, 254, 256, 258, 260, 262, 264, 266, 268, 270, 272, 274, 276, 278, 280
                               , 282, 284, 286, 288, 290, 292, 294, 296, 298, 300, 302, 304, 306, 308, 310, 312, 3
                               14, 316, 318
NUMA node1 CPU(s):            80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116,
                               118, 120, 122, 124, 126, 128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 15
                               0, 152, 154, 156, 158, 320, 322, 324, 326, 328, 330, 332, 334, 336, 338, 340, 342,
                               344, 346, 348, 350, 352, 354, 356, 358, 360, 362, 364, 366, 368, 370, 372, 374, 37
                               6, 378, 380, 382, 384, 386, 388, 390, 392, 394, 396, 398
NUMA node2 CPU(s):            160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 19

```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026_fp_base = 900

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026_fp_peak = 925

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Platform Notes (Continued)

```

2,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,
226,228,230,232,234,236,238,400,402,404,406,408,410,412,414,416,41
8,420,422,424,426,428,430,432,434,436,438,440,442,444,446,448,450,
452,454,456,458,460,462,464,466,468,470,472,474,476,478
NUMA node3 CPU(s): 1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47
,49,51,53,55,57,59,61,63,65,67,69,71,73,75,77,79,241,243,245,247,2
49,251,253,255,257,259,261,263,265,267,269,271,273,275,277,279,281
,283,285,287,289,291,293,295,297,299,301,303,305,307,309,311,313,3
15,317,319
NUMA node4 CPU(s): 81,83,85,87,89,91,93,95,97,99,101,103,105,107,109,111,113,115,117,
119,121,123,125,127,129,131,133,135,137,139,141,143,145,147,149,15
1,153,155,157,159,321,323,325,327,329,331,333,335,337,339,341,343,
345,347,349,351,353,355,357,359,361,363,365,367,369,371,373,375,37
7,379,381,383,385,387,389,391,393,395,397,399
NUMA node5 CPU(s): 161,163,165,167,169,171,173,175,177,179,181,183,185,187,189,191,19
3,195,197,199,201,203,205,207,209,211,213,215,217,219,221,223,225,
227,229,231,233,235,237,239,401,403,405,407,409,411,413,415,417,41
9,421,423,425,427,429,431,433,435,437,439,441,443,445,447,449,451,
453,455,457,459,461,463,465,467,469,471,473,475,477,479
Vulnerability Gather data sampling: Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer
sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional;
PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsa: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|--------|----------|----------------|
| L1d | 48K | 11.3M | 12 | Data | 1 | 64 | 1 | 64 |
| L1i | 64K | 15M | 16 | Instruction | 1 | 64 | 1 | 64 |
| L2 | 2M | 480M | 16 | Unified | 2 | 2048 | 1 | 64 |
| L3 | 504M | 1008M | 16 | Unified | 3 | 516096 | 1 | 64 |

8. numactl --hardware

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026_fp_base = 900

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026_fp_peak = 925

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Nov-2025

Platform Notes (Continued)

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 6 nodes (0-5)

node 0 cpus:

0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 240, 242, 244, 246, 248, 250, 252, 254, 256, 258, 260, 262, 264, 266, 268, 270, 272, 274, 276, 278, 280, 282, 284, 286, 288, 290, 292, 294, 296, 298, 300, 302, 304, 306, 308, 310, 312, 314, 316, 318

node 0 size: 257586 MB

node 0 free: 227975 MB

node 1 cpus:

80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 320, 322, 324, 326, 328, 330, 332, 334, 336, 338, 340, 342, 344, 346, 348, 350, 352, 354, 356, 358, 360, 362, 364, 366, 368, 370, 372, 374, 376, 378, 380, 382, 384, 386, 388, 390, 392, 394, 396, 398

node 1 size: 258018 MB

node 1 free: 255356 MB

node 2 cpus:

160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230, 232, 234, 236, 238, 400, 402, 404, 406, 408, 410, 412, 414, 416, 418, 420, 422, 424, 426, 428, 430, 432, 434, 436, 438, 440, 442, 444, 446, 448, 450, 452, 454, 456, 458, 460, 462, 464, 466, 468, 470, 472, 474, 476, 478

node 2 size: 258018 MB

node 2 free: 255423 MB

node 3 cpus:

1, 3, 5, 7, 9, 11, 13, 15, 17, 19, 21, 23, 25, 27, 29, 31, 33, 35, 37, 39, 41, 43, 45, 47, 49, 51, 53, 55, 57, 59, 61, 63, 65, 67, 69, 71, 73, 75, 77, 79, 241, 243, 245, 247, 249, 251, 253, 255, 257, 259, 261, 263, 265, 267, 269, 271, 273, 275, 277, 279, 281, 283, 285, 287, 289, 291, 293, 295, 297, 299, 301, 303, 305, 307, 309, 311, 313, 315, 317, 319

node 3 size: 258018 MB

node 3 free: 255485 MB

node 4 cpus:

81, 83, 85, 87, 89, 91, 93, 95, 97, 99, 101, 103, 105, 107, 109, 111, 113, 115, 117, 119, 121, 123, 125, 127, 129, 131, 133, 135, 137, 139, 141, 143, 145, 147, 149, 151, 153, 155, 157, 159, 321, 323, 325, 327, 329, 331, 333, 335, 337, 339, 341, 343, 345, 347, 349, 351, 353, 355, 357, 359, 361, 363, 365, 367, 369, 371, 373, 375, 377, 379, 381, 383, 385, 387, 389, 391, 393, 395, 397, 399

node 4 size: 257977 MB

node 4 free: 254894 MB

node 5 cpus:

161, 163, 165, 167, 169, 171, 173, 175, 177, 179, 181, 183, 185, 187, 189, 191, 193, 195, 197, 199, 201, 203, 205, 207, 209, 211, 213, 215, 217, 219, 221, 223, 225, 227, 229, 231, 233, 235, 237, 239, 401, 403, 405, 407, 409, 411, 413, 415, 417, 419, 421, 423, 425, 427, 429, 431, 433, 435, 437, 439, 441, 443, 445, 447, 449, 451, 453, 455, 457, 459, 461, 463, 465, 467, 469, 471, 473, 475, 477, 479

node 5 size: 257939 MB

node 5 free: 255166 MB

node distances:

| node | 0 | 1 | 2 | 3 | 4 | 5 |
|------|----|----|----|----|----|----|
| 0: | 10 | 15 | 17 | 29 | 29 | 29 |
| 1: | 15 | 10 | 15 | 29 | 29 | 29 |
| 2: | 17 | 15 | 10 | 29 | 29 | 29 |
| 3: | 29 | 29 | 29 | 10 | 15 | 17 |
| 4: | 29 | 29 | 29 | 15 | 10 | 15 |
| 5: | 29 | 29 | 29 | 17 | 15 | 10 |

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026_fp_base = 900

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026_fp_peak = 925

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Platform Notes (Continued)

9. /proc/meminfo

MemTotal: 1584700804 kB

'who -r' did not return a run level

10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)

Default Target Status
graphical running

11. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audit-rules auditd
chronyd dbus-broker firewalld getty@ irqbalance issue-generator kbdsettings klog
lvm2-monitor nvme-fc-boot-connections nvme-autoconnect rollback rsyslog smartd
soft-reboot-cleanup sshd systemd-pstore wpa_supplicant wtmpdb-update-boot
enabled-runtime systemd-remount-fs
disabled blk-availability boot-sysctl ca-certificates ca-certificates-setup chrony-wait
console-getty debug-shell dnsmasq gpm grub2-once hwloc-dump-hwdata issue-add-ssh-keys
kea-ctrl-agent kea-dhcp-ddns kea-dhcp4 kea-dhcp6 kernel-sysctl kexec-load lastlog2-import
lunmask lvm-devices-import man-db-create multipathd named nftables nis-domainname
rpmconfigcheck rsyncd serial-getty@ setup-systemd-proxy-env smartd_generate_opts snmpd
snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator
systemd-sysextd systemd-time-wait-sync systemd-timesyncd systemd-udev-load-credentials
udisks2 wpa_supplicant@
indirect systemd-userdbd

12. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.12.0-160000.5-default
root=UUID=187f5822-5433-42e1-bee8-2e104457c7c5
mitigations=auto
quiet
security=selinux
selinux=1

13. cpupower frequency-info

analyzing CPU 378:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026_fp_base = 900

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026_fp_peak = 925

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Nov-2025

Platform Notes (Continued)

14. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode           0

```

15. /sys/kernel/mm/transparent_hugepage

```

defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

16. /sys/kernel/mm/transparent_hugepage/khugepaged

```

alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

17. OS release

```

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 16.0

```

18. Disk information

SPEC is set to: /mnt/ramdisk/cpu2026rc2

```

Filesystem      Type      Size  Used Avail Use% Mounted on

```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026_fp_base = 900

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026_fp_peak = 925

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Platform Notes (Continued)

tmpfs tmpfs 240G 13G 228G 6% /mnt/ramdisk

19. /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge R770AP
Product Family: PowerEdge
Serial: R7701AP

20. dmidecode
Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
13x 00CE063200CE M321R8GA0PB1-CCPQC 64 GB 2 rank 6400
11x 00CE063200CE M321R8GA0PB2-CCPKC 64 GB 2 rank 6400

21. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Dell Inc.
BIOS Version: 1.1.6
BIOS Date: 11/06/2025
BIOS Revision: 1.1

Compiler Version Notes

=====
C | 782.lbm_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

=====
C++ | 731.astcenc_r(base, peak) 736.ocio_r(base, peak)
| 748.flightdm_r(base, peak) 766.femflow_r(base, peak)
| 767.nest_r(base, peak) 772.marian_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026_fp_base = 900

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026_fp_peak = 925

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Compiler Version Notes (Continued)

=====
C++, C | 709.cactus_r(base, peak) 737.gmsh_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
=====

=====
Fortran | 722.palm_r(base, peak) 749.fotonik3d_r(base, peak) 765.roms_r(base,
| peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both C and C++:
icpx icx

Base Portability Flags

709.cactus_r: -DSPEC_LP64
722.palm_r: -DSPEC_LP64
731.ascenc_r: -DSPEC_LP64
736.ocio_r: -DSPEC_LP64
737.gmsh_r: -DSPEC_LP64 -fno-associative-math
748.flightdm_r: -DSPEC_LP64
749.fotonik3d_r: -DSPEC_LP64
765.roms_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026_fp_base = 900

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026_fp_peak = 925

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Nov-2025

Base Portability Flags (Continued)

766.femflow_r: -DSPEC_LP64

767.nest_r: -DSPEC_LP64

772.marian_r: -DSPEC_LP64

782.lbm_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -std=c18 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib
-ljemalloc
```

C++ benchmarks:

```
-m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib
-ljemalloc
```

Fortran benchmarks:

```
-m64 -stand f18 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib
-ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026_fp_base = 900

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026_fp_peak = 925

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:
icpx icx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

782.lbm_r: basepeak = yes

C++ benchmarks:

731.astcenc_r: -m64 -std=c++17 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xHost(pass 1)
-ffp-model=fast -xgraniterapids(pass 2) -flt0
-mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3
-mfpmath=sse -funroll-loops
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

736.ocio_r: basepeak = yes

748.flightdm_r: Same as 731.astcenc_r

766.femflow_r: basepeak = yes

767.nest_r: Same as 731.astcenc_r

772.marian_r: basepeak = yes

Fortran benchmarks:

722.palm_r: basepeak = yes

749.fotonik3d_r: basepeak = yes

765.roms_r: basepeak = yes

Benchmarks using both C and C++:

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026_fp_base = 900

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026_fp_peak = 925

CPU2026 License: 6573

Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2025

Tested by: Dell Inc.

Software Availability: Nov-2025

Peak Optimization Flags (Continued)

709.cactus_r: basepeak = yes

```

737.gmsh_r: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xHost(pass 1)
-ffp-model=fast -xgraniterapids(pass 2) -flto
-mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3
-mfpmath=sse -funroll-loops
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.html>
<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.xml>
<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-05 06:11:31-0500.
Report generated on 2026-05-11 16:37:50 by CPU2026 PDF formatter (unknown).
Originally published on 2026-05-05.