



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_fp\_base = 14.0

PowerEdge R770AP (Intel Xeon 6978P)

SPECspeed®2026\_fp\_peak = 14.6

CPU2026 License: 6573


Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2025

Tested by: Dell Inc.

Software Availability: Nov-2025

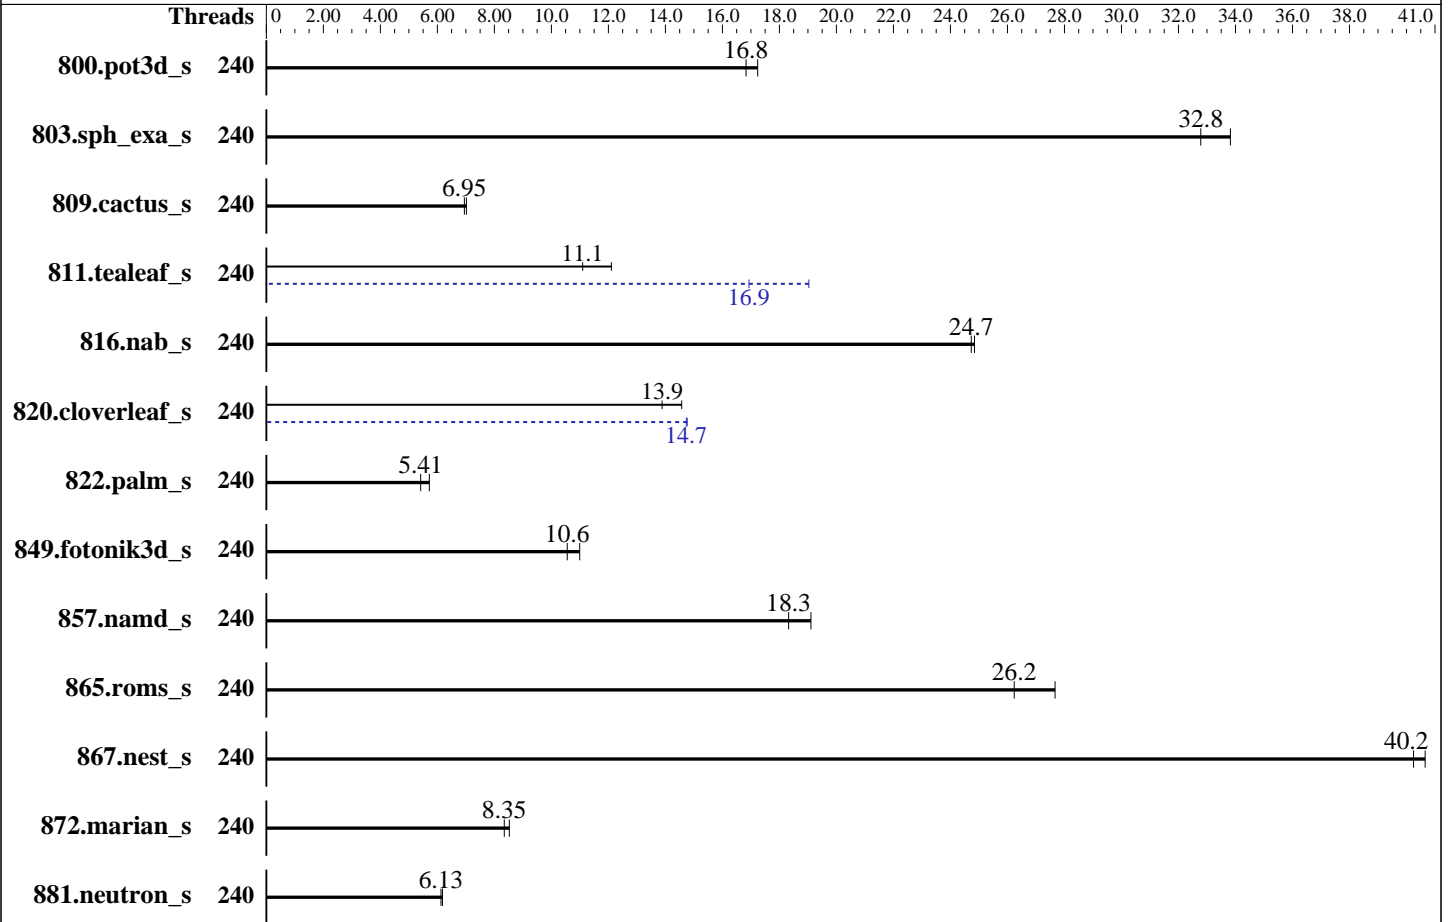

### Hardware

CPU Name: Intel Xeon 6978P  
 Max MHz: 3900  
 Nominal: 2100  
 Enabled: 240 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 64 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 504 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)  
 Storage: 150 GB on tmpfs  
 Cooling: Air  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 16.0  
 6.12.0-160000.5-default  
 Compiler: C/C++: Version 2025.3 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2025.3 of Intel Fortran  
 Compiler for Linux  
 Compiler Category: Vendor  
 Firmware: Version 1.1.6 released Nov-2025  
 File System: tmpfs  
 System State: Run level 5 (graphical multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator v5.3  
 Power Management: BIOS set to prefer performance at the cost of  
 additional power usage.



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2026\_fp\_base = 14.0

PowerEdge R770AP (Intel Xeon 6978P)

SPECSpeed®2026\_fp\_peak = 14.6

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Dec-2025  
Software Availability: Nov-2025

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
800.pot3d_s	240	<b>40.0</b>	<b>16.8</b>	39.0	17.2			240	<b>40.0</b>	<b>16.8</b>	39.0	17.2		
803.sph_exa_s	240	36.6	33.8	<b>37.8</b>	<b>32.8</b>			240	36.6	33.8	<b>37.8</b>	<b>32.8</b>		
809.cactus_s	240	<b>162</b>	<b>6.95</b>	160	7.02			240	<b>162</b>	<b>6.95</b>	160	7.02		
811.tealeaf_s	240	<b>50.2</b>	<b>11.1</b>	46.0	12.1			240	<b>32.9</b>	<b>16.9</b>	29.3	19.0		
816.nab_s	240	45.3	24.8	<b>45.5</b>	<b>24.7</b>			240	45.3	24.8	<b>45.5</b>	<b>24.7</b>		
820.cloverleaf_s	240	58.8	14.6	<b>61.7</b>	<b>13.9</b>			240	<b>58.2</b>	<b>14.7</b>	58.0	14.8		
822.palm_s	240	<b>227</b>	<b>5.41</b>	215	5.72			240	<b>227</b>	<b>5.41</b>	215	5.72		
849.fotonik3d_s	240	<b>62.5</b>	<b>10.6</b>	60.0	11.0			240	<b>62.5</b>	<b>10.6</b>	60.0	11.0		
857.namd_s	240	<b>79.2</b>	<b>18.3</b>	76.0	19.1			240	<b>79.2</b>	<b>18.3</b>	76.0	19.1		
865.roms_s	240	<b>41.5</b>	<b>26.2</b>	39.4	27.7			240	<b>41.5</b>	<b>26.2</b>	39.4	27.7		
867.nest_s	240	<b>53.7</b>	<b>40.2</b>	53.1	40.7			240	<b>53.7</b>	<b>40.2</b>	53.1	40.7		
872.marian_s	240	<b>130</b>	<b>8.35</b>	127	8.52			240	<b>130</b>	<b>8.35</b>	127	8.52		
881.neutron_s	240	<b>133</b>	<b>6.13</b>	132	6.18			240	<b>133</b>	<b>6.13</b>	132	6.18		

SPECSpeed®2026\_fp\_base = 14.0

SPECSpeed®2026\_fp\_peak = 14.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/mnt/ramdisk/cpu2026rc2/lib"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
jemalloc, a general purpose malloc implementation  
built with the CentOS Stream 9, and the system compiler gcc 11.5.0  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>  
Benchmark run from a 150 GB ramdisk created with the cmd: "mount -t tmpfs -o size=150G tmpfs /mnt/ramdisk"



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_fp\_base = 14.0

PowerEdge R770AP (Intel Xeon 6978P)

SPECspeed®2026\_fp\_peak = 14.6

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Nov-2025

## Platform Notes

### BIOS Settings:

Logical Processor : Disabled

LLC Prefetch : Enabled

System Profile : Custom

CPU Power Management : Maximum Performance

C1E : Disabled

C-States : Autonomous

Latency Optimized Mode : Enabled

Energy Efficient Policy : Performance

DIMM Self Healing -

on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2026rc2/bin/sysinfo

Rev: 069f95da7e7f5d81b2ce48a82150e54f

running on R7701AP-R770AP Fri Feb 6 10:29:09 2026

SUT (System Under Test) info as seen by some common utilities.

### ----- Table of contents -----

1. uname -srvm
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)
  11. Services, from systemctl list-unit-files
  12. Linux kernel boot-time arguments, from /proc/cmdline
  13. cpupower frequency-info
  14. sysctl
  15. /sys/kernel/mm/transparent\_hugepage
  16. /sys/kernel/mm/transparent\_hugepage/khugepaged
  17. OS release
  18. Disk information
  19. /sys/devices/virtual/dmi/id
  20. dmidecode
  21. BIOS
- -----

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_fp\_base = 14.0

PowerEdge R770AP (Intel Xeon 6978P)

SPECspeed®2026\_fp\_peak = 14.6

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Dec-2025  
Software Availability: Nov-2025

## Platform Notes (Continued)

1. `uname -srv`  
Linux 6.12.0-160000.5-default #1 SMP PREEMPT\_DYNAMIC Wed Sep 10 15:26:25 UTC 2025 (3545bbd) x86\_64

2. `w`  
10:29:09 up 4 min, 1 user, load average: 0.65, 1.21, 0.62  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 10:27 34.00s 1.13s ? /bin/bash  
/home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=7.0\_T01 --output\_format html, pdf, txt

3. Username  
From environment variable \$USER: root

4. `ulimit -a`  
real-time non-blocking time (microseconds, -R) unlimited  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 6186063  
max locked memory (kbytes, -l) 8192  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 6186063  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

5. `sysinfo process ancestry`  
/usr/lib/systemd/systemd --switched-root --system --deserialize=47  
login -- root  
-bash  
/bin/bash /home/DellFiles/bin/DELL\_speed.sh  
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed  
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed  
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=7.0\_T01 --output\_format html, pdf, txt  
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=7.0\_T01 --output\_format html, pdf, txt  
runcpu --nobuild --reportable --action validate --define default-platform-flags -c

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_fp\_base = 14.0

PowerEdge R770AP (Intel Xeon 6978P)

SPECspeed®2026\_fp\_peak = 14.6

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Dec-2025  
Software Availability: Nov-2025

## Platform Notes (Continued)

```
ic2025.3-graniterapids-cpu2026-0.902-speed-20260121.cfg --threads 240 --define cores=240 --tune base,peak
-o all --define drop_caches --iterations 2 --define DL-VERS=7.0_T01 --output_format html,pdf,txt fpspeed
runcpu --nobuild --reportable --action validate --define default-platform-flags --configfile
ic2025.3-graniterapids-cpu2026-0.902-speed-20260121.cfg --threads 240 --define cores=240 --tune base,peak
--output_format all --define drop_caches --iterations 2 --define DL-VERS=7.0_T01 --output_format
html,pdf,txt --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv --note-preenv
--logfile $SPEC/tmp/CPU2026.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2026rc2
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6978P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x10003f3
bugs           : spectre_v1 spectre_v2 spec_store_bypass swaps bhi spectre_v2_user
cpu cores      : 120
siblings       : 120
2 physical ids (chips)
240 processors (hardware threads)
physical id 0: core ids 0-39,64-103,128-167
physical id 1: core ids 0-39,64-103,128-167
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174
,176,178,180,182,184,186,188,190,192,194,196,198,200,202,204,206,256,258,260,262,264,266,268,270,272,274,
276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,308,310,312,314,316,318,320,322,324,326,3
28,330,332,334
physical id 1: apicids
512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5
64,566,568,570,572,574,576,578,580,582,584,586,588,590,640,642,644,646,648,650,652,654,656,658,660,662,66
4,666,668,670,672,674,676,678,680,682,684,686,688,690,692,694,696,698,700,702,704,706,708,710,712,714,716
,718,768,770,772,774,776,778,780,782,784,786,788,790,792,794,796,798,800,802,804,806,808,810,812,814,816,
818,820,822,824,826,828,830,832,834,836,838,840,842,844,846
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

## 7. lscpu

```
From lscpu from util-linux 2.41.1:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_fp\_base = 14.0

PowerEdge R770AP (Intel Xeon 6978P)

SPECspeed®2026\_fp\_peak = 14.6

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Dec-2025  
Software Availability: Nov-2025

## Platform Notes (Continued)

```

Byte Order:                Little Endian
CPU(s):                    240
On-line CPU(s) list:      0-239
Vendor ID:                 GenuineIntel
Model name:                Intel(R) Xeon(R) 6978P
CPU family:                6
Model:                     173
Thread(s) per core:       1
Core(s) per socket:       120
Socket(s):                 2
Stepping:                  1
BogoMIPS:                  4200.00
Flags:                     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                           pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                           pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                           nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                           pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma
                           cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                           tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                           3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin
                           cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                           flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep
                           bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                           avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
                           avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                           cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni
                           avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi vnmi avx512vbmi
                           umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                           avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
                           bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                           serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
                           amx_tile amx_int8 flush_lld arch_capabilities
Virtualization:           VT-x
L1d cache:                 11.3 MiB (240 instances)
L1i cache:                 15 MiB (240 instances)
L2 cache:                  480 MiB (240 instances)
L3 cache:                  1008 MiB (2 instances)
NUMA node(s):              2
NUMA node0 CPU(s):        0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46
                           , 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90
                           , 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 1
                           26, 128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158
                           , 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 1
                           92, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224
                           , 226, 228, 230, 232, 234, 236, 238
NUMA node1 CPU(s):        1, 3, 5, 7, 9, 11, 13, 15, 17, 19, 21, 23, 25, 27, 29, 31, 33, 35, 37, 39, 41, 43, 45, 47
                           , 49, 51, 53, 55, 57, 59, 61, 63, 65, 67, 69, 71, 73, 75, 77, 79, 81, 83, 85, 87, 89, 91

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_fp\_base = 14.0

PowerEdge R770AP (Intel Xeon 6978P)

SPECspeed®2026\_fp\_peak = 14.6

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Dec-2025  
Software Availability: Nov-2025

## Platform Notes (Continued)

, 93, 95, 97, 99, 101, 103, 105, 107, 109, 111, 113, 115, 117, 119, 121, 123, 125, 127, 129, 131, 133, 135, 137, 139, 141, 143, 145, 147, 149, 151, 153, 155, 157, 159, 161, 163, 165, 167, 169, 171, 173, 175, 177, 179, 181, 183, 185, 187, 189, 191, 193, 195, 197, 199, 201, 203, 205, 207, 209, 211, 213, 215, 217, 219, 221, 223, 225, 227, 229, 231, 233, 235, 237, 239

Vulnerability Gather data sampling: Not affected  
 Vulnerability Indirect target selection: Not affected  
 Vulnerability Itlb multihit: Not affected  
 Vulnerability L1tf: Not affected  
 Vulnerability Mds: Not affected  
 Vulnerability Meltdown: Not affected  
 Vulnerability Mmio stale data: Not affected  
 Vulnerability Reg file data sampling: Not affected  
 Vulnerability Retbleed: Not affected  
 Vulnerability Spec rstack overflow: Not affected  
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
 Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; PBRSE-eIBRS Not affected; BHI BHI\_DIS\_S  
 Vulnerability Srbds: Not affected  
 Vulnerability Tsa: Not affected  
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	11.3M	12	Data	1	64	1	64
L1i	64K	15M	16	Instruction	1	64	1	64
L2	2M	480M	16	Unified	2	2048	1	64
L3	504M	1008M	16	Unified	3	516096	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus:

0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230, 232, 234, 236, 238

node 0 size: 772682 MB

node 0 free: 769911 MB

node 1 cpus:

1, 3, 5, 7, 9, 11, 13, 15, 17, 19, 21, 23, 25, 27, 29, 31, 33, 35, 37, 39, 41, 43, 45, 47, 49, 51, 53, 55, 57, 59, 61, 63, 65, 67, 69, 71, 73, 75, 77, 79, 81, 83, 85, 87, 89, 91, 93, 95, 97, 99, 101, 103, 105, 107, 109, 111, 113, 115, 117, 119, 121, 123, 125, 127, 129, 131, 133, 135, 137, 139, 141, 143, 145, 147, 149, 151, 153, 155, 157, 159, 161, 163, 165, 167, 169, 171, 173, 175, 177, 179, 181, 183, 185, 187, 189, 191, 193, 195, 197, 199, 201, 203, 205, 207, 209, 211, 213, 215, 217, 219, 221, 223, 225, 227, 229, 231, 233, 235, 237, 239

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_fp\_base = 14.0

PowerEdge R770AP (Intel Xeon 6978P)

SPECspeed®2026\_fp\_peak = 14.6

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Dec-2025  
Software Availability: Nov-2025

## Platform Notes (Continued)

```
node 1 size: 774059 MB
node 1 free: 743488 MB
node distances:
node    0    1
  0:   10   21
  1:   21   10
```

```
-----
9. /proc/meminfo
   MemTotal:      1583863344 kB

'who -r' did not return a run level
```

```
-----
10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)
    Default Target  Status
    graphical      running
```

```
-----
11. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audit-rules auditd
               chronyd dbus-broker firewalld getty@ irqbalance issue-generator kbdsettings klog
               lvm2-monitor nvme-fc-boot-connections nvme-autoconnect rollback rsyslog smartd
               soft-reboot-cleanup sshd systemd-pstore wpa_supplicant wtmpdb-update-boot
enabled-runtime systemd-remount-fs
disabled       blk-availability boot-sysctl ca-certificates ca-certificates-setup chrony-wait
               console-getty debug-shell dnsmasq gpm grub2-once hwloc-dump-hwdata issue-add-ssh-keys
               kea-ctrl-agent kea-dhcp-ddns kea-dhcp4 kea-dhcp6 kernel-sysctl kexec-load lastlog2-import
               lunmask lvm-devices-import man-db-create multipathd named nftables nis-domainname
               rpmconfigcheck rsyncd serial-getty@ setup-systemd-proxy-env smartd_generate_opts snmpd
               snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator
               systemd-sysextd systemd-time-wait-sync systemd-timesyncd systemd-udev-load-credentials
               udisks2 wpa_supplicant@
indirect       systemd-userdbd
```

```
-----
12. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.12.0-160000.5-default
root=UUID=187f5822-5433-42e1-bee8-2e104457c7c5
mitigations=auto
quiet
security=selinux
selinux=1
```

```
-----
13. cpupower frequency-info
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_fp\_base = 14.0

PowerEdge R770AP (Intel Xeon 6978P)

SPECspeed®2026\_fp\_peak = 14.6

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Nov-2025

## Platform Notes (Continued)

```
analyzing CPU 176:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
```

### 14. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

### 15. /sys/kernel/mm/transparent\_hugepage

```
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

### 16. /sys/kernel/mm/transparent\_hugepage/khugepaged

```
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000
```

### 17. OS release

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_fp\_base = 14.0

PowerEdge R770AP (Intel Xeon 6978P)

SPECspeed®2026\_fp\_peak = 14.6

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Dec-2025  
Software Availability: Nov-2025

## Platform Notes (Continued)

From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 16.0

### 18. Disk information

SPEC is set to: /mnt/ramdisk/cpu2026rc2  
Filesystem Type Size Used Avail Use% Mounted on  
tmpfs tmpfs 150G 13G 138G 9% /mnt/ramdisk

### 19. /sys/devices/virtual/dmi/id

Vendor: Dell Inc.  
Product: PowerEdge R770AP  
Product Family: PowerEdge  
Serial: R7701AP

### 20. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

13x 00CE063200CE M321R8GA0PB1-CCPQC 64 GB 2 rank 6400  
11x 00CE063200CE M321R8GA0PB2-CCPKC 64 GB 2 rank 6400

### 21. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.  
BIOS Version: 1.1.6  
BIOS Date: 11/06/2025  
BIOS Revision: 1.1

## Compiler Version Notes

C | 811.tealeaf\_s(base, peak) 816.nab\_s(base, peak) 881.neutron\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_fp\_base = 14.0

PowerEdge R770AP (Intel Xeon 6978P)

SPECspeed®2026\_fp\_peak = 14.6

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Dec-2025  
Software Availability: Nov-2025

## Compiler Version Notes (Continued)

=====  
C++ | 803.sph\_exa\_s(base, peak) 857.namd\_s(base, peak) 867.nest\_s(base,  
| peak) 872.marian\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 809.cactus\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 800.pot3d\_s(base, peak) 820.cloverleaf\_s(base, peak)  
| 822.palm\_s(base, peak) 849.fotonik3d\_s(base, peak) 865.roms\_s(base,  
| peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx

Benchmarks using both C and C++:  
icpx icx



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_fp\_base = 14.0

PowerEdge R770AP (Intel Xeon 6978P)

SPECspeed®2026\_fp\_peak = 14.6

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Dec-2025  
Software Availability: Nov-2025

## Base Portability Flags

800.pot3d\_s: -DSPEC\_LP64  
803.sph\_exa\_s: -DSPEC\_LP64  
809.cactus\_s: -DSPEC\_LP64  
811.tealeaf\_s: -DSPEC\_LP64  
816.nab\_s: -DSPEC\_LP64  
820.cloverleaf\_s: -DSPEC\_LP64  
822.palm\_s: -DSPEC\_LP64  
849.fotonik3d\_s: -DSPEC\_LP64  
857.namd\_s: -DSPEC\_LP64  
865.roms\_s: -DSPEC\_LP64  
867.nest\_s: -DSPEC\_LP64  
872.marian\_s: -DSPEC\_LP64  
881.neutron\_s: -DSPEC\_LP64

## Base Optimization Flags

### C benchmarks:

-m64 -std=c18 -Wl,-z,muldefs -xgraniterapids  
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC\_OPENMP  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

### C++ benchmarks:

803.sph\_exa\_s: -m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids  
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-fiopenmp -DSPEC\_OPENMP -L/usr/local/jemalloc-5.3.0/lib  
-ljemalloc

857.namd\_s: Same as 803.sph\_exa\_s

867.nest\_s: Same as 803.sph\_exa\_s

872.marian\_s: -m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids  
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-pthread -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

### Fortran benchmarks:

-m64 -stand f18 -Wl,-z,muldefs -xgraniterapids  
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -DSPEC\_OPENMP -fiopenmp  
-nostandard-realloc-lhs -align array32byte -auto

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_fp\_base = 14.0

PowerEdge R770AP (Intel Xeon 6978P)

SPECspeed®2026\_fp\_peak = 14.6

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Nov-2025

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

`-L/usr/local/jemalloc-5.3.0/lib -ljemalloc`

Benchmarks using both C and C++:

`-m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xgraniterapids  
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc`

## Peak Compiler Invocation

C benchmarks:

`icx`

C++ benchmarks:

`icpx`

Fortran benchmarks:

`ifx`

Benchmarks using both C and C++:

`icpx icx`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

`811.tealeaf_s: -m64 -std=c18 -Wl,-z,muldefs -fiopenmp -DSPEC_OPENMP  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc`

`816.nab_s: basepeak = yes`

`881.neutron_s: basepeak = yes`

C++ benchmarks:

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026\_fp\_base = 14.0

PowerEdge R770AP (Intel Xeon 6978P)

SPECspeed®2026\_fp\_peak = 14.6

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Nov-2025

## Peak Optimization Flags (Continued)

803.sph\_exa\_s: basepeak = yes

857.namd\_s: basepeak = yes

867.nest\_s: basepeak = yes

872.marian\_s: basepeak = yes

Fortran benchmarks:

800.pot3d\_s: basepeak = yes

820.cloverleaf\_s: -m64 -stand f18 -Wl,-z,muldefs -DSPEC\_OPENMP -fiopenmp  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

822.palm\_s: basepeak = yes

849.fotonik3d\_s: basepeak = yes

865.roms\_s: basepeak = yes

Benchmarks using both C and C++:

809.cactus\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.html>

<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.xml>

<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-05 23:59:08-0500.

Report generated on 2026-05-04 23:28:45 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.