



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2026\_int\_base = 909

## PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026\_int\_peak = 956

CPU2026 License: 6573


Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2025

Tested by: Dell Inc.

Software Availability: Nov-2025

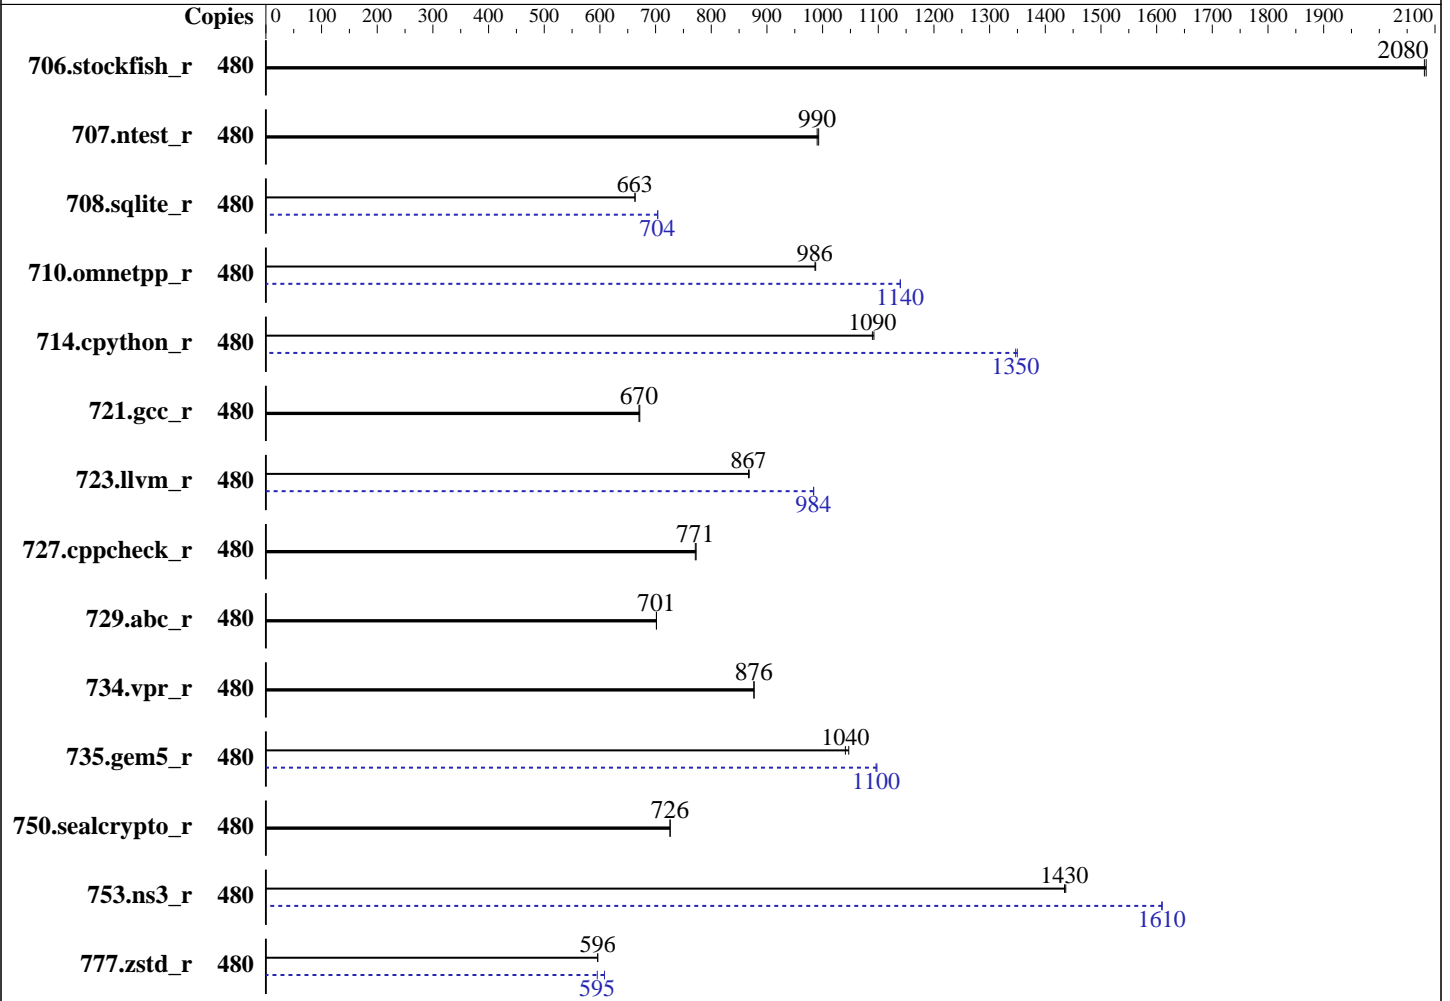

### Hardware

CPU Name: Intel Xeon 6978P  
 Max MHz: 3900  
 Nominal: 2100  
 Enabled: 240 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 64 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 504 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)  
 Storage: 240 GB on tmpfs  
 Cooling: Air  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 16.0  
 6.12.0-160000.5-default  
 Compiler: C/C++: Version 2025.3 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2025.3 of Intel Fortran  
 Compiler for Linux  
 Compiler Category: Vendor  
 Firmware: Version 1.1.6 released Nov-2025  
 File System: tmpfs  
 System State: Run level 5 (graphical multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of  
 additional power usage.



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_int\_base = 909

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026\_int\_peak = 956

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Dec-2025  
Software Availability: Nov-2025

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
706.stockfish_r	480	<b><u>291</u></b>	<b><u>2080</u></b>	290	2080			480	<b><u>291</u></b>	<b><u>2080</u></b>	290	2080		
707.ntest_r	480	<b><u>287</u></b>	<b><u>990</u></b>	286	993			480	<b><u>287</u></b>	<b><u>990</u></b>	286	993		
708.sqlite_r	480	<b><u>382</u></b>	<b><u>663</u></b>	382	663			480	360	704	<b><u>360</u></b>	<b><u>704</u></b>		
710.omnetpp_r	480	<b><u>237</u></b>	<b><u>986</u></b>	236	988			480	<b><u>205</u></b>	<b><u>1140</u></b>	205	1140		
714.cpython_r	480	211	1090	<b><u>211</u></b>	<b><u>1090</u></b>			480	<b><u>171</u></b>	<b><u>1350</u></b>	170	1350		
721.gcc_r	480	490	672	<b><u>491</u></b>	<b><u>670</u></b>			480	490	672	<b><u>491</u></b>	<b><u>670</u></b>		
723.llvm_r	480	280	868	<b><u>281</u></b>	<b><u>867</u></b>			480	<b><u>247</u></b>	<b><u>984</u></b>	247	984		
727.cppcheck_r	480	<b><u>223</u></b>	<b><u>771</u></b>	223	773			480	<b><u>223</u></b>	<b><u>771</u></b>	223	773		
729.abc_r	480	314	702	<b><u>314</u></b>	<b><u>701</u></b>			480	314	702	<b><u>314</u></b>	<b><u>701</u></b>		
734.vpr_r	480	252	877	<b><u>252</u></b>	<b><u>876</u></b>			480	252	877	<b><u>252</u></b>	<b><u>876</u></b>		
735.gem5_r	480	223	1050	<b><u>225</u></b>	<b><u>1040</u></b>			480	213	1100	<b><u>213</u></b>	<b><u>1100</u></b>		
750.sealcrypto_r	480	354	726	<b><u>354</u></b>	<b><u>726</u></b>			480	354	726	<b><u>354</u></b>	<b><u>726</u></b>		
753.ns3_r	480	205	1440	<b><u>205</u></b>	<b><u>1430</u></b>			480	183	1610	<b><u>183</u></b>	<b><u>1610</u></b>		
777.zstd_r	480	519	596	<b><u>519</u></b>	<b><u>596</u></b>			480	<b><u>519</u></b>	<b><u>595</u></b>	508	608		

SPECrate®2026\_int\_base = **909**

SPECrate®2026\_int\_peak = **956**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/mnt/ramdisk/cpu2026rc2/lib"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_int\_base = 909

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026\_int\_peak = 956

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Dec-2025  
Software Availability: Nov-2025

## General Notes (Continued)

Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
Benchmark run from a 240 GB ramdisk created with the cmd: "mount -t tmpfs -o size=240G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS Settings:

Sub NUMA Cluster : Enabled

System Profile : Custom

CPU Power Management : Maximum Performance

C-States : Autonomous

Latency Optimized Mode : Enabled

Energy Efficient Policy : Performance

Sysinfo program /mnt/ramdisk/cpu2026rc2/bin/sysinfo  
Rev: 069f95da7e7f5d81b2ce48a82150e54f  
running on R7701AP-R770AP Thu Feb 5 11:39:08 2026

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)
11. Services, from systemctl list-unit-files
12. Linux kernel boot-time arguments, from /proc/cmdline
13. cpupower frequency-info
14. sysctl
15. /sys/kernel/mm/transparent\_hugepage
16. /sys/kernel/mm/transparent\_hugepage/khugepaged
17. OS release
18. Disk information
19. /sys/devices/virtual/dmi/id

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_int\_base = 909

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026\_int\_peak = 956

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Dec-2025  
Software Availability: Nov-2025

## Platform Notes (Continued)

20. dmidecode  
21. BIOS

1. `uname -srvm`  
Linux 6.12.0-160000.5-default #1 SMP PREEMPT\_DYNAMIC Wed Sep 10 15:26:25 UTC 2025 (3545bbd) x86\_64

2. `w`  
11:39:08 up 3 min, 1 user, load average: 1.39, 1.52, 0.69  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 11:37 34.00s 1.29s ? /bin/bash  
/home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=7.0\_T01 --output\_format html, pdf, txt

3. Username  
From environment variable \$USER: root

4. `ulimit -a`  
real-time non-blocking time (microseconds, -R) unlimited  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 6189327  
max locked memory (kbytes, -l) 8192  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 6189327  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

5. `sysinfo process ancestry`  
/usr/lib/systemd/systemd --switched-root --system --deserialize=47  
login -- root  
-bash  
/bin/bash /home/DellFiles/bin/DELL\_rate.sh  
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate  
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_int\_base = 909

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026\_int\_peak = 956

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Dec-2025  
Software Availability: Nov-2025

## Platform Notes (Continued)

```

/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=7.0_T01 --output_format
html,pdf,txt
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=7.0_T01 --output_format
html,pdf,txt
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 480 -c
ic2025.3-graniterapids-cpu2026-0.902-rate-20260121.cfg --define smt-on --define cores=240 --define
physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2
--define DL-VERS=7.0_T01 --output_format html,pdf,txt intrate
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 480 --configfile
ic2025.3-graniterapids-cpu2026-0.902-rate-20260121.cfg --define smt-on --define cores=240 --define
physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all
--iterations 2 --define DL-VERS=7.0_T01 --output_format html,pdf,txt --nopower --runmode rate --tune
base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2026rc2

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6978P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x10003f3
bugs           : spectre_v1 spectre_v2 spec_store_bypass swaggs bhi spectre_v2_user
cpu cores      : 120
siblings       : 240
2 physical ids (chips)
480 processors (hardware threads)
physical id 0: core ids 0-39,64-103,128-167
physical id 1: core ids 0-39,64-103,128-167
physical id 0: apicids 0-79,128-207,256-335
physical id 1: apicids 512-591,640-719,768-847

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

```

From lscpu from util-linux 2.41.1:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:         Little Endian
CPU(s):             480
On-line CPU(s) list: 0-479

```

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

## SPECrate®2026\_int\_base = 909

## PowerEdge R770AP (Intel Xeon 6978P)

## SPECrate®2026\_int\_peak = 956

**CPU2026 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Dec-2025  
**Software Availability:** Nov-2025

### Platform Notes (Continued)

Vendor ID:	GenuineIntel
Model name:	Intel(R) Xeon(R) 6978P
CPU family:	6
Model:	173
Thread(s) per core:	2
Core(s) per socket:	120
Socket(s):	2
Stepping:	1
BogoMIPS:	4200.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_lld arch_capabilities
Virtualization:	VT-x
L1d cache:	11.3 MiB (240 instances)
L1i cache:	15 MiB (240 instances)
L2 cache:	480 MiB (240 instances)
L3 cache:	1008 MiB (2 instances)
NUMA node(s):	6
NUMA node0 CPU(s):	0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46 , 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 240, 242, 244, 246, 2 48, 250, 252, 254, 256, 258, 260, 262, 264, 266, 268, 270, 272, 274, 276, 278, 280 , 282, 284, 286, 288, 290, 292, 294, 296, 298, 300, 302, 304, 306, 308, 310, 312, 3 14, 316, 318
NUMA node1 CPU(s):	80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 15 0, 152, 154, 156, 158, 320, 322, 324, 326, 328, 330, 332, 334, 336, 338, 340, 342, 344, 346, 348, 350, 352, 354, 356, 358, 360, 362, 364, 366, 368, 370, 372, 374, 37 6, 378, 380, 382, 384, 386, 388, 390, 392, 394, 396, 398
NUMA node2 CPU(s):	160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 19 2, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224,

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Dell Inc.

## SPECrate®2026\_int\_base = 909

## PowerEdge R770AP (Intel Xeon 6978P)

## SPECrate®2026\_int\_peak = 956

**CPU2026 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Dec-2025  
**Software Availability:** Nov-2025

### Platform Notes (Continued)

```

226, 228, 230, 232, 234, 236, 238, 400, 402, 404, 406, 408, 410, 412, 414, 416, 41
8, 420, 422, 424, 426, 428, 430, 432, 434, 436, 438, 440, 442, 444, 446, 448, 450,
452, 454, 456, 458, 460, 462, 464, 466, 468, 470, 472, 474, 476, 478
NUMA node3 CPU(s): 1, 3, 5, 7, 9, 11, 13, 15, 17, 19, 21, 23, 25, 27, 29, 31, 33, 35, 37, 39, 41, 43, 45, 47
, 49, 51, 53, 55, 57, 59, 61, 63, 65, 67, 69, 71, 73, 75, 77, 79, 241, 243, 245, 247, 2
49, 251, 253, 255, 257, 259, 261, 263, 265, 267, 269, 271, 273, 275, 277, 279, 281
, 283, 285, 287, 289, 291, 293, 295, 297, 299, 301, 303, 305, 307, 309, 311, 313, 3
15, 317, 319
NUMA node4 CPU(s): 81, 83, 85, 87, 89, 91, 93, 95, 97, 99, 101, 103, 105, 107, 109, 111, 113, 115, 117,
119, 121, 123, 125, 127, 129, 131, 133, 135, 137, 139, 141, 143, 145, 147, 149, 15
1, 153, 155, 157, 159, 321, 323, 325, 327, 329, 331, 333, 335, 337, 339, 341, 343,
345, 347, 349, 351, 353, 355, 357, 359, 361, 363, 365, 367, 369, 371, 373, 375, 37
7, 379, 381, 383, 385, 387, 389, 391, 393, 395, 397, 399
NUMA node5 CPU(s): 161, 163, 165, 167, 169, 171, 173, 175, 177, 179, 181, 183, 185, 187, 189, 191, 19
3, 195, 197, 199, 201, 203, 205, 207, 209, 211, 213, 215, 217, 219, 221, 223, 225,
227, 229, 231, 233, 235, 237, 239, 401, 403, 405, 407, 409, 411, 413, 415, 417, 41
9, 421, 423, 425, 427, 429, 431, 433, 435, 437, 439, 441, 443, 445, 447, 449, 451,
453, 455, 457, 459, 461, 463, 465, 467, 469, 471, 473, 475, 477, 479
Vulnerability Gather data sampling: Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer
sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional;
PBR SB-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsa: Not affected
Vulnerability Tsx async abort: Not affected

```

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	11.3M	12	Data	1	64	1	64
L1i	64K	15M	16	Instruction	1	64	1	64
L2	2M	480M	16	Unified	2	2048	1	64
L3	504M	1008M	16	Unified	3	516096	1	64

8. `numactl --hardware`

NOTE: a `numactl 'node'` might or might not correspond to a physical chip.

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_int\_base = 909

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026\_int\_peak = 956

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Dec-2025  
Software Availability: Nov-2025

## Platform Notes (Continued)

```

available: 6 nodes (0-5)
node 0 cpus:
0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 240, 242, 244, 246, 248, 250, 252, 254, 256, 258, 260, 262, 264, 266, 268, 270, 272, 274, 276, 278, 280, 282, 284, 286, 288, 290, 292, 294, 296, 298, 300, 302, 304, 306, 308, 310, 312, 314, 316, 318
node 0 size: 257586 MB
node 0 free: 228551 MB
node 1 cpus:
80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 320, 322, 324, 326, 328, 330, 332, 334, 336, 338, 340, 342, 344, 346, 348, 350, 352, 354, 356, 358, 360, 362, 364, 366, 368, 370, 372, 374, 376, 378, 380, 382, 384, 386, 388, 390, 392, 394, 396, 398
node 1 size: 258018 MB
node 1 free: 257132 MB
node 2 cpus:
160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230, 232, 234, 236, 238, 400, 402, 404, 406, 408, 410, 412, 414, 416, 418, 420, 422, 424, 426, 428, 430, 432, 434, 436, 438, 440, 442, 444, 446, 448, 450, 452, 454, 456, 458, 460, 462, 464, 466, 468, 470, 472, 474, 476, 478
node 2 size: 258018 MB
node 2 free: 257214 MB
node 3 cpus:
1, 3, 5, 7, 9, 11, 13, 15, 17, 19, 21, 23, 25, 27, 29, 31, 33, 35, 37, 39, 41, 43, 45, 47, 49, 51, 53, 55, 57, 59, 61, 63, 65, 67, 69, 71, 73, 75, 77, 79, 241, 243, 245, 247, 249, 251, 253, 255, 257, 259, 261, 263, 265, 267, 269, 271, 273, 275, 277, 279, 281, 283, 285, 287, 289, 291, 293, 295, 297, 299, 301, 303, 305, 307, 309, 311, 313, 315, 317, 319
node 3 size: 258018 MB
node 3 free: 257226 MB
node 4 cpus:
81, 83, 85, 87, 89, 91, 93, 95, 97, 99, 101, 103, 105, 107, 109, 111, 113, 115, 117, 119, 121, 123, 125, 127, 129, 131, 133, 135, 137, 139, 141, 143, 145, 147, 149, 151, 153, 155, 157, 159, 321, 323, 325, 327, 329, 331, 333, 335, 337, 339, 341, 343, 345, 347, 349, 351, 353, 355, 357, 359, 361, 363, 365, 367, 369, 371, 373, 375, 377, 379, 381, 383, 385, 387, 389, 391, 393, 395, 397, 399
node 4 size: 257977 MB
node 4 free: 256551 MB
node 5 cpus:
161, 163, 165, 167, 169, 171, 173, 175, 177, 179, 181, 183, 185, 187, 189, 191, 193, 195, 197, 199, 201, 203, 205, 207, 209, 211, 213, 215, 217, 219, 221, 223, 225, 227, 229, 231, 233, 235, 237, 239, 401, 403, 405, 407, 409, 411, 413, 415, 417, 419, 421, 423, 425, 427, 429, 431, 433, 435, 437, 439, 441, 443, 445, 447, 449, 451, 453, 455, 457, 459, 461, 463, 465, 467, 469, 471, 473, 475, 477, 479
node 5 size: 257939 MB
node 5 free: 256962 MB
node distances:
node      0      1      2      3      4      5
0:      10     15     17     29     29     29
1:      15     10     15     29     29     29
2:      17     15     10     29     29     29
3:      29     29     29     10     15     17
4:      29     29     29     15     10     15
5:      29     29     29     17     15     10

```

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_int\_base = 909

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026\_int\_peak = 956

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Dec-2025  
Software Availability: Nov-2025

## Platform Notes (Continued)

9. /proc/meminfo

MemTotal: 1584700804 kB

'who -r' did not return a run level

-----  
10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)

Default Target Status  
graphical running

-----  
11. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audit-rules auditd chronyd dbus-broker firewalld getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nvme-fc-boot-connections nvme-autoconnect rollback rsyslog smartd soft-reboot-cleanup sshd systemd-pstore wpa_supplicant wtmpdb-update-boot
enabled-runtime	systemd-remount-fs
disabled	blk-availability boot-sysctl ca-certificates ca-certificates-setup chrony-wait console-getty debug-shell dnsmasq gpm grub2-once hwloc-dump-hwdata issue-add-ssh-keys kea-ctrl-agent kea-dhcp-ddns kea-dhcp4 kea-dhcp6 kernel-sysctl kexec-load lastlog2-import lunmask lvm-devices-import man-db-create multipathd named nftables nis-domainname rpmconfigcheck rsyncd serial-getty@ setup-systemd-proxy-env smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync systemd-timesyncd systemd-udev-load-credentials udisks2 wpa_supplicant@
indirect	systemd-userdbd

-----  
12. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=/boot/vmlinuz-6.12.0-160000.5-default  
root=UUID=187f5822-5433-42e1-bee8-2e104457c7c5  
mitigations=auto  
quiet  
security=selinux  
selinux=1

-----  
13. cpupower frequency-info

analyzing CPU 248:  
Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes

-----  
14. sysctl

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_int\_base = 909

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026\_int\_peak = 956

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Nov-2025

## Platform Notes (Continued)

```

kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
15. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
16. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
17. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 16.0

```

```

-----
18. Disk information
SPEC is set to: /mnt/ramdisk/cpu2026rc2
Filesystem  Type  Size  Used Avail Use% Mounted on
tmpfs       tmpfs 240G  13G 228G  6% /mnt/ramdisk

```

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_int\_base = 909

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026\_int\_peak = 956

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Dec-2025  
Software Availability: Nov-2025

## Platform Notes (Continued)

```

-----
19. /sys/devices/virtual/dmi/id
Vendor:      Dell Inc.
Product:    PowerEdge R770AP
Product Family: PowerEdge
Serial:     R7701AP

```

```

-----
20. dmidecode
Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  13x 00CE063200CE M321R8GA0PB1-CCPQC 64 GB 2 rank 6400
  11x 00CE063200CE M321R8GA0PB2-CCPKC 64 GB 2 rank 6400

```

```

-----
21. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Dell Inc.
BIOS Version:     1.1.6
BIOS Date:        11/06/2025
BIOS Revision:    1.1

```

## Compiler Version Notes

```

=====
C      | 708.sqlite_r(base, peak) 714.cpython_r(base, peak) 777.zstd_r(base,
      | peak)

```

```

-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

```

```

=====
C++   | 706.stockfish_r(base, peak) 707.ntest_r(base, peak)
      | 727.cppcheck_r(base, peak) 753.ns3_r(base, peak)

```

```

-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

```

(Continued on next page)



# SPEC CPU<sup>®</sup>2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate<sup>®</sup>2026\_int\_base = 909

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate<sup>®</sup>2026\_int\_peak = 956

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Dec-2025  
Software Availability: Nov-2025

## Compiler Version Notes (Continued)

```
=====  
C++, C | 710.omnetpp_r(base, peak) 721.gcc_r(base, peak) 723.llvm_r(base,  
| peak) 729.abc_r(base, peak) 734.vpr_r(base, peak) 735.gem5_r(base,  
| peak) 750.sealcrypto_r(base, peak)  
=====
```

```
-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.  
-----
```

## Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Benchmarks using both C and C++:  
icpx icx

## Base Portability Flags

```
706.stockfish_r: -DSPEC_LP64  
707.ntest_r: -DSPEC_LP64  
708.sqlite_r: -DSPEC_LP64  
710.omnetpp_r: -DSPEC_LP64  
714.cpython_r: -DSPEC_LP64  
721.gcc_r: -DSPEC_LP64  
723.llvm_r: -DSPEC_LP64  
727.cppcheck_r: -DSPEC_LP64  
729.abc_r: -DSPEC_LP64  
734.vpr_r: -DSPEC_LP64  
735.gem5_r: -DSPEC_LP64  
750.sealcrypto_r: -DSPEC_LP64  
753.ns3_r: -DSPEC_LP64  
777.zstd_r: -DSPEC_LP64
```



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2026\_int\_base = 909

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate®2026\_int\_peak = 956

CPU2026 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2026  
Hardware Availability: Dec-2025  
Software Availability: Nov-2025

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c18 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2025.3/lib -lqkmallo
```

C++ benchmarks:

```
-m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2025.3/lib -lqkmallo
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2025.3/lib -lqkmallo
```

## Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Benchmarks using both C and C++:

```
icpx icx
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
-m64 -std=c18 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xHost(pass 1) -ffp-model=fast
-xgraniterapids(pass 2) -flto -mprefer-vector-width=512
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops
```

(Continued on next page)



# SPEC CPU<sup>®</sup>2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate<sup>®</sup>2026\_int\_base = 909

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate<sup>®</sup>2026\_int\_peak = 956

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Nov-2025

## Peak Optimization Flags (Continued)

C benchmarks (continued):

```
-L/opt/intel/oneapi/compiler/2025.3/lib -lqkmalloc
```

C++ benchmarks:

```
706.stockfish_r: basepeak = yes
```

```
707.ntest_r: basepeak = yes
```

```
727.cppcheck_r: basepeak = yes
```

```
753.ns3_r: -m64 -std=c++17 -Wl,-z,muldefs
```

```
-fprofile-generate(pass 1)
```

```
-fprofile-use=default.profddata(pass 2) -xHost(pass 1)
```

```
-ffp-model=fast -xgraniterapids(pass 2) -flto
```

```
-mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3
```

```
-mfpmath=sse -funroll-loops
```

```
-L/opt/intel/oneapi/compiler/2025.3/lib -lqkmalloc
```

Benchmarks using both C and C++:

```
710.omnetpp_r: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs
```

```
-fprofile-generate(pass 1)
```

```
-fprofile-use=default.profddata(pass 2) -xHost(pass 1)
```

```
-ffp-model=fast -xgraniterapids(pass 2) -flto
```

```
-mprefer-vector-width=512 -qopt-mem-layout-trans=4 -O3
```

```
-mfpmath=sse -funroll-loops
```

```
-L/opt/intel/oneapi/compiler/2025.3/lib -lqkmalloc
```

```
721.gcc_r: basepeak = yes
```

```
723.llvm_r: Same as 710.omnetpp_r
```

```
729.abc_r: basepeak = yes
```

```
734.vpr_r: basepeak = yes
```

```
735.gem5_r: Same as 710.omnetpp_r
```

```
750.sealcrypto_r: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.html>

<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.html>



# SPEC CPU<sup>®</sup>2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate<sup>®</sup>2026\_int\_base = 909

PowerEdge R770AP (Intel Xeon 6978P)

SPECrate<sup>®</sup>2026\_int\_peak = 956

**CPU2026 License:** 6573

**Test Date:** Feb-2026

**Test Sponsor:** Dell Inc.

**Hardware Availability:** Dec-2025

**Tested by:** Dell Inc.

**Software Availability:** Nov-2025

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.xml>

<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU<sup>®</sup>2026 v0.902.0 on 2026-02-05 01:09:08-0500.

Report generated on 2026-05-11 16:38:33 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.