



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2026_fp_base = 14.4

PowerEdge R770AP (Intel Xeon 6980P)

SPECSpeed®2026_fp_peak = 14.7

CPU2026 License: 6573


Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2025

Tested by: Dell Inc.

Software Availability: Nov-2025

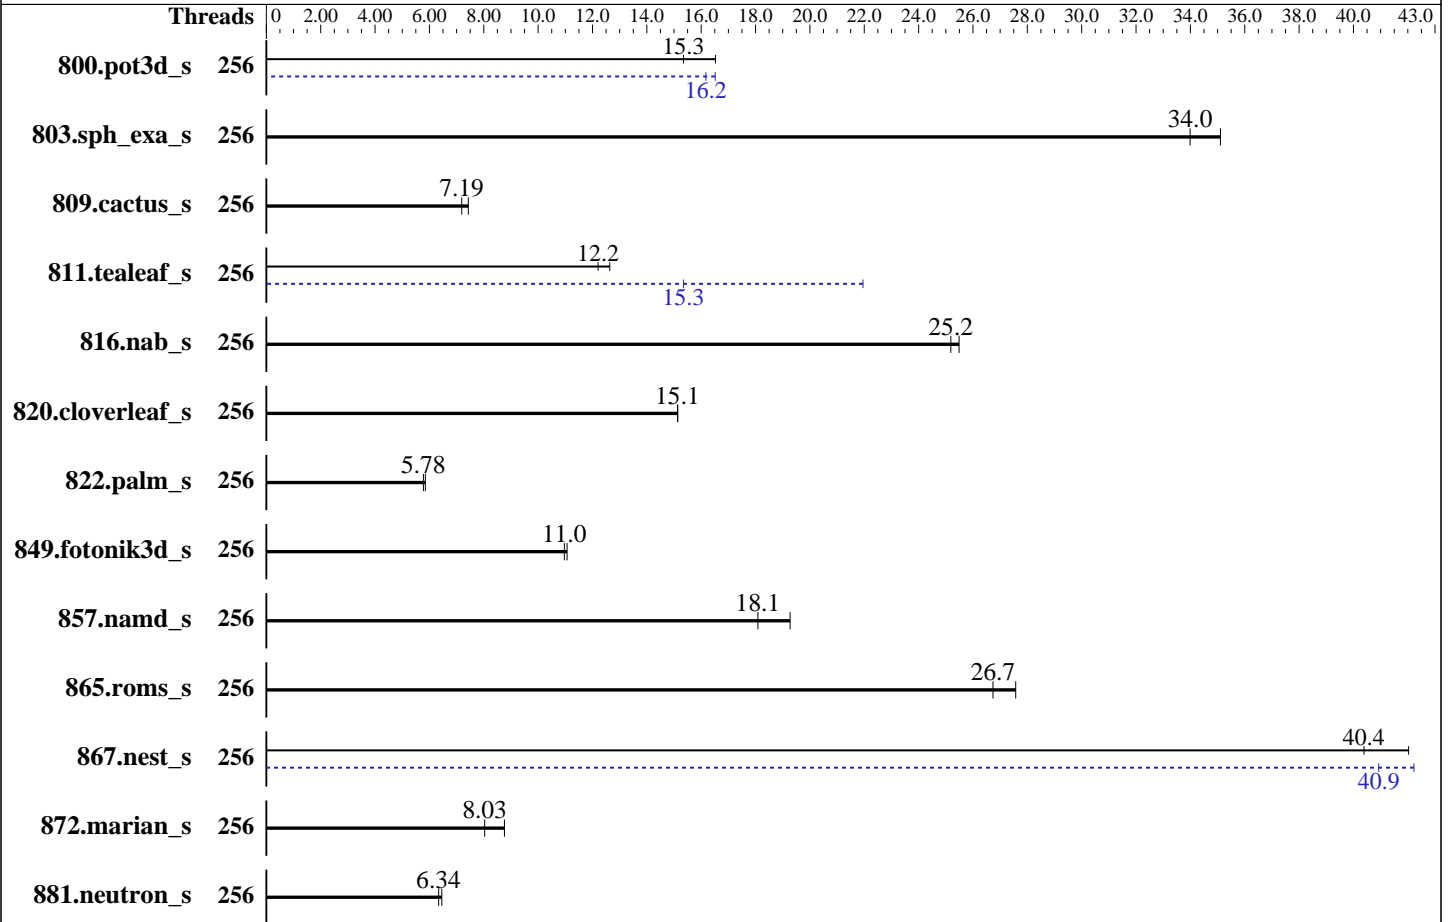

Hardware

CPU Name: Intel Xeon 6980P
 Max MHz: 3900
 Nominal: 2000
 Enabled: 256 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 504 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 150 GB on tmpfs
 Cooling: Air
 Other: None

Software

OS: SUSE Linux Enterprise Server 16.0
 6.12.0-160000.5-default
 Compiler: C/C++: Version 2025.3 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2025.3 of Intel Fortran
 Compiler for Linux
 Compiler Category: Vendor
 Firmware: Version 1.1.6 released Nov-2025
 File System: tmpfs
 System State: Run level 5 (graphical multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator v5.3
 Power Management: BIOS set to prefer performance at the cost of
 additional power usage.



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2026_fp_base = 14.4

PowerEdge R770AP (Intel Xeon 6980P)

SPECSpeed®2026_fp_peak = 14.7

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
800.pot3d_s	256	40.7	16.5	<u>43.8</u>	<u>15.3</u>			256	40.8	16.5	<u>41.6</u>	<u>16.2</u>		
803.sph_exa_s	256	35.3	35.1	<u>36.4</u>	<u>34.0</u>			256	35.3	35.1	<u>36.4</u>	<u>34.0</u>		
809.cactus_s	256	151	7.43	<u>156</u>	<u>7.19</u>			256	151	7.43	<u>156</u>	<u>7.19</u>		
811.tealeaf_s	256	44.1	12.6	<u>45.6</u>	<u>12.2</u>			256	25.4	22.0	<u>36.3</u>	<u>15.3</u>		
816.nab_s	256	<u>44.7</u>	<u>25.2</u>	44.2	25.5			256	<u>44.7</u>	<u>25.2</u>	44.2	25.5		
820.cloverleaf_s	256	56.6	15.1	<u>56.6</u>	<u>15.1</u>			256	56.6	15.1	<u>56.6</u>	<u>15.1</u>		
822.palm_s	256	210	5.85	<u>212</u>	<u>5.78</u>			256	210	5.85	<u>212</u>	<u>5.78</u>		
849.fotonik3d_s	256	59.6	11.1	<u>60.2</u>	<u>11.0</u>			256	59.6	11.1	<u>60.2</u>	<u>11.0</u>		
857.namd_s	256	75.3	19.3	<u>80.3</u>	<u>18.1</u>			256	75.3	19.3	<u>80.3</u>	<u>18.1</u>		
865.roms_s	256	<u>40.8</u>	<u>26.7</u>	39.5	27.6			256	<u>40.8</u>	<u>26.7</u>	39.5	27.6		
867.nest_s	256	<u>53.5</u>	<u>40.4</u>	51.4	42.0			256	51.2	42.2	<u>52.8</u>	<u>40.9</u>		
872.marian_s	256	<u>135</u>	<u>8.03</u>	124	8.76			256	<u>135</u>	<u>8.03</u>	124	8.76		
881.neutron_s	256	126	6.46	<u>129</u>	<u>6.34</u>			256	126	6.46	<u>129</u>	<u>6.34</u>		

SPECSpeed®2026_fp_base = 14.4

SPECSpeed®2026_fp_peak = 14.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu2026-0.902.0-ic2025p3/lib"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the CentOS Stream 9, and the system compiler gcc 11.5.0
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>
Benchmark run from a 150 GB ramdisk created with the cmd: "mount -t tmpfs -o size=150G tmpfs /mnt/ramdisk"



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 14.4

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_fp_peak = 14.7

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Platform Notes

BIOS Settings:

Logical Processor : Disabled
LLC Prefetch : Enabled

System Profile : Custom
CPU Power Management : Maximum Performance
C1E : Disabled

C-States : Autonomous
Latency Optimized Mode : Enabled
Energy Efficient Policy : Performance
DIMM Self Healing -
on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2026-0.902.0-ic2025p3/bin/sysinfo
Rev: 069f95da7e7f5d81b2ce48a82150e54f
running on R7702AP-R770AP Sun Feb 8 02:23:20 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -srvm
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)
 11. Services, from systemctl list-unit-files
 12. Linux kernel boot-time arguments, from /proc/cmdline
 13. cpupower frequency-info
 14. sysctl
 15. /sys/kernel/mm/transparent_hugepage
 16. /sys/kernel/mm/transparent_hugepage/khugepaged
 17. OS release
 18. Disk information
 19. /sys/devices/virtual/dmi/id
 20. dmidecode
 21. BIOS
- -----

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 14.4

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_fp_peak = 14.7

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Platform Notes (Continued)

1. `uname -srvm`
Linux 6.12.0-160000.5-default #1 SMP PREEMPT_DYNAMIC Wed Sep 10 15:26:25 UTC 2025 (3545bbd) x86_64

2. `w`
02:23:20 up 4:25, 1 user, load average: 0.19, 0.05, 0.02
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 22:00 24.00s 1.23s ? /bin/bash
/home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=7.0_T04 --output_format html, pdf, txt

3. Username
From environment variable \$USER: root

4. `ulimit -a`
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 6185899
max locked memory (kbytes, -l) 8192
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 6185899
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. `sysinfo process ancestry`
/usr/lib/systemd/systemd --switched-root --system --deserialize=47
login -- root
-bash
/bin/bash /home/DellFiles/bin/DELL_speed.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=7.0_T04 --output_format html, pdf, txt
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=7.0_T04 --output_format html, pdf, txt
runcpu --nobuild --reportable --action validate --define default-platform-flags -c

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 14.4

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_fp_peak = 14.7

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Platform Notes (Continued)

```
ic2025.3-graniterapids-cpu2026-0.902-speed-20260121.cfg --threads 256 --define cores=256 --tune base,peak
-o all --define drop_caches --iterations 2 --define DL-VERS=7.0_T04 --output_format html,pdf,txt fpspeed
runcpu --nobuild --reportable --action validate --define default-platform-flags --configfile
ic2025.3-graniterapids-cpu2026-0.902-speed-20260121.cfg --threads 256 --define cores=256 --tune base,peak
--output_format all --define drop_caches --iterations 2 --define DL-VERS=7.0_T04 --output_format
html,pdf,txt --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv --note-preenv
--logfile $SPEC/tmp/CPU2026.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2026-0.902.0-ic2025p3
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6980P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 173
stepping        : 1
microcode       : 0x10003f3
bugs            : spectre_v1 spectre_v2 spec_store_bypass swaps bhi spectre_v2_user
cpu cores       : 128
siblings        : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0:  core ids 0-42,64-106,128-169
physical id 1:  core ids 0-42,64-106,128-169
physical id 0:  apicids
```

```
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,17
0,172,174,176,178,180,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,256,258,260,262,264
,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,308,310,312,314,316,
318,320,322,324,326,328,330,332,334,336,338
```

physical id 1: apicids

```
512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5
64,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,640,642,644,646,648,650,652,654,656,65
8,660,662,664,666,668,670,672,674,676,678,680,682,684,686,688,690,692,694,696,698,700,702,704,706,708,710
,712,714,716,718,720,722,724,768,770,772,774,776,778,780,782,784,786,788,790,792,794,796,798,800,802,804,
806,808,810,812,814,816,818,820,822,824,826,828,830,832,834,836,838,840,842,844,846,848,850
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.41.1:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 14.4

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_fp_peak = 14.7

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Platform Notes (Continued)

```

Byte Order:                Little Endian
CPU(s):                    256
On-line CPU(s) list:      0-255
Vendor ID:                 GenuineIntel
Model name:               Intel(R) Xeon(R) 6980P
CPU family:               6
Model:                    173
Thread(s) per core:      1
Core(s) per socket:      128
Socket(s):                2
Stepping:                 1
BogoMIPS:                 4000.00
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                          pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                          pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                          nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                          pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma
                          cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                          tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                          3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin
                          cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                          flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep
                          bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                          avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
                          avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                          cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni
                          avx512_bf16 wbnoinvd dtherm ida arat pln pts vnni avx512vbmi umip
                          pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
                          avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote
                          movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                          arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                          arch_capabilities
Virtualization:           VT-x
L1d cache:                12 MiB (256 instances)
L1i cache:                16 MiB (256 instances)
L2 cache:                 512 MiB (256 instances)
L3 cache:                 1008 MiB (2 instances)
NUMA node(s):             2
NUMA node0 CPU(s):       0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46
                          , 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90
                          , 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 1
                          26, 128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158
                          , 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 1
                          92, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224
                          , 226, 228, 230, 232, 234, 236, 238, 240, 242, 244, 246, 248, 250, 252, 254
NUMA node1 CPU(s):       1, 3, 5, 7, 9, 11, 13, 15, 17, 19, 21, 23, 25, 27, 29, 31, 33, 35, 37, 39, 41, 43, 45, 47
                          , 49, 51, 53, 55, 57, 59, 61, 63, 65, 67, 69, 71, 73, 75, 77, 79, 81, 83, 85, 87, 89, 91

```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 14.4

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_fp_peak = 14.7

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Platform Notes (Continued)

, 93, 95, 97, 99, 101, 103, 105, 107, 109, 111, 113, 115, 117, 119, 121, 123, 125, 127, 129, 131, 133, 135, 137, 139, 141, 143, 145, 147, 149, 151, 153, 155, 157, 159, 161, 163, 165, 167, 169, 171, 173, 175, 177, 179, 181, 183, 185, 187, 189, 191, 193, 195, 197, 199, 201, 203, 205, 207, 209, 211, 213, 215, 217, 219, 221, 223, 225, 227, 229, 231, 233, 235, 237, 239, 241, 243, 245, 247, 249, 251, 253, 255

Vulnerability Gather data sampling: Not affected
 Vulnerability Indirect target selection: Not affected
 Vulnerability Itlb multihit: Not affected
 Vulnerability L1tf: Not affected
 Vulnerability Mds: Not affected
 Vulnerability Meltdown: Not affected
 Vulnerability Mmio stale data: Not affected
 Vulnerability Reg file data sampling: Not affected
 Vulnerability Retbleed: Not affected
 Vulnerability Spec rstack overflow: Not affected
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
 Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; PBRBSB-eIBRS Not affected; BHI BHI_DIS_S
 Vulnerability Srbds: Not affected
 Vulnerability Tsa: Not affected
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	12M	12	Data	1	64	1	64
L1i	64K	16M	16	Instruction	1	64	1	64
L2	2M	512M	16	Unified	2	2048	1	64
L3	504M	1008M	16	Unified	3	516096	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
 node 0 cpus:
 0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230, 232, 234, 236, 238, 240, 242, 244, 246, 248, 250, 252, 254
 node 0 size: 772720 MB
 node 0 free: 755622 MB
 node 1 cpus:
 1, 3, 5, 7, 9, 11, 13, 15, 17, 19, 21, 23, 25, 27, 29, 31, 33, 35, 37, 39, 41, 43, 45, 47, 49, 51, 53, 55, 57, 59, 61, 63, 65, 67, 69, 71, 73, 75, 77, 79, 81, 83, 85, 87, 89, 91, 93, 95, 97, 99, 101, 103, 105, 107, 109, 111, 113, 115, 117, 119, 121, 123, 125, 127, 129, 131, 133, 135, 137, 139, 141, 143, 145, 147, 149, 151, 153, 155, 157, 159, 161, 163, 165, 167, 169, 171, 173, 175, 177, 179, 181, 183, 185, 187,

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 14.4

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_fp_peak = 14.7

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Platform Notes (Continued)

189,191,193,195,197,199,201,203,205,207,209,211,213,215,217,219,221,223,225,227,229,231,233,235,237,239,241,243,245,247,249,251,253,255

node 1 size: 773978 MB

node 1 free: 758185 MB

node distances:

```
node      0      1
0:       10     21
1:       21     10
```

9. /proc/meminfo

MemTotal: 1583820428 kB

'who -r' did not return a run level

10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)

```
Default Target Status
graphical          running
```

11. Services, from systemctl list-unit-files

```
STATE          UNIT FILES
enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audit-rules auditd
                chronyd dbus-broker firewalld getty@ irqbalance issue-generator kbdsettings klog
                lvm2-monitor nvme-fc-boot-connections nvme-fc-autoconnect rollback rsyslog smartd
                soft-reboot-cleanup systemd-pstore wpa_supplicant wtmpdb-update-boot
enabled-runtime systemd-fsck-root systemd-remount-fs
disabled       blk-availability boot-sysctl ca-certificates ca-certificates-setup chrony-wait
                console-getty debug-shell dnsmasq gpm grub2-once hwloc-dump-hwdata issue-add-ssh-keys
                kernel-sysctl kexec-load lastlog2-import lunmask lvm-devices-import man-db-create
                multipathd nftables nis-domainname rpmconfigcheck rsyncd serial-getty@
                setup-systemd-proxy-env smartd_generate_opts snmpd snmptrapd sshd
                systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext
                systemd-time-wait-sync systemd-timesyncd systemd-udev-load-credentials udisks2
                wpa_supplicant@
indirect       systemd-userdbd
```

12. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.12.0-160000.5-default
root=UUID=5b29d236-615c-4a3f-a6f0-3da4c3dd18d0
mitigations=auto
quiet
security=selinux
selinux=1
```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 14.4

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_fp_peak = 14.7

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Nov-2025

Platform Notes (Continued)

```

13. cpupower frequency-info
    analyzing CPU 73:
        Unable to determine current policy
        boost state support:
            Supported: yes
            Active: yes
  
```

```

14. sysctl
    kernel.numa_balancing          1
    kernel.randomize_va_space      2
    vm.compaction_proactiveness    20
    vm.dirty_background_bytes      0
    vm.dirty_background_ratio      10
    vm.dirty_bytes                  0
    vm.dirty_expire_centisecs      3000
    vm.dirty_ratio                  20
    vm.dirty_writeback_centisecs   500
    vm.dirtytime_expire_seconds    43200
    vm.extfrag_threshold            500
    vm.min_unmapped_ratio          1
    vm.nr_hugepages                 0
    vm.nr_hugepages_mempolicy      0
    vm.nr_overcommit_hugepages     0
    vm.swappiness                   60
    vm.watermark_boost_factor      15000
    vm.watermark_scale_factor      10
    vm.zone_reclaim_mode           0
  
```

```

15. /sys/kernel/mm/transparent_hugepage
    defrag          always defer defer+madvice [madvice] never
    enabled         [always] madvice never
    hpage_pmd_size 2097152
    shmem_enabled   always within_size advise [never] deny force
  
```

```

16. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs  60000
    defrag                  1
    max_ptes_none          511
    max_ptes_shared        256
    max_ptes_swap          64
    pages_to_scan          4096
    scan_sleep_millisecs   10000
  
```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 14.4

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_fp_peak = 14.7

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Platform Notes (Continued)

17. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 16.0

18. Disk information

SPEC is set to: /mnt/ramdisk/cpu2026-0.902.0-ic2025p3
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 150G 13G 138G 9% /mnt/ramdisk

19. /sys/devices/virtual/dmi/id

Vendor: Dell Inc.
Product: PowerEdge R770AP
Product Family: PowerEdge
Serial: R7702AP

20. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
1x 00AD042300AD HMC94AHBRA480N 64 GB 2 rank 6400
23x 00AD063200AD HMC94AHBRA277N 64 GB 2 rank 6400

21. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.
BIOS Version: 1.1.6
BIOS Date: 11/06/2025
BIOS Revision: 1.1

Compiler Version Notes

C | 811.tealeaf_s(base, peak) 816.nab_s(base, peak) 881.neutron_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 14.4

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_fp_peak = 14.7

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Compiler Version Notes (Continued)

=====
C++ | 803.sph_exa_s(base, peak) 857.namd_s(base, peak) 867.nest_s(base, peak) 872.marian_s(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

=====
C++, C | 809.cactus_s(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

=====
Fortran | 800.pot3d_s(base, peak) 820.cloverleaf_s(base, peak) 822.palm_s(base, peak) 849.fotonik3d_s(base, peak) 865.roms_s(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both C and C++:
icpx icx



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 14.4

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_fp_peak = 14.7

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Nov-2025

Base Portability Flags

```

800.pot3d_s: -DSPEC_LP64
803.sph_exa_s: -DSPEC_LP64
809.cactus_s: -DSPEC_LP64
811.tealeaf_s: -DSPEC_LP64
816.nab_s: -DSPEC_LP64
820.cloverleaf_s: -DSPEC_LP64
822.palm_s: -DSPEC_LP64
849.fotonik3d_s: -DSPEC_LP64
857.namd_s: -DSPEC_LP64
865.roms_s: -DSPEC_LP64
867.nest_s: -DSPEC_LP64
872.marian_s: -DSPEC_LP64
881.neutron_s: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -std=c18 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

```

C++ benchmarks:

```

803.sph_exa_s: -m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib
-ljemalloc

```

857.namd_s: Same as 803.sph_exa_s

867.nest_s: Same as 803.sph_exa_s

```

872.marian_s: -m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-pthread -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

```

Fortran benchmarks:

```

-m64 -stand f18 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -DSPEC_OPENMP -fiopenmp
-nostandard-realloc-lhs -align array32byte -auto

```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 14.4

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_fp_peak = 14.7

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Nov-2025

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

`-L/usr/local/jemalloc-5.3.0/lib -ljemalloc`

Benchmarks using both C and C++:

`-m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc`

Peak Compiler Invocation

C benchmarks:

`icx`

C++ benchmarks:

`icpx`

Fortran benchmarks:

`ifx`

Benchmarks using both C and C++:

`icpx icx`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

`811.tealeaf_s: -m64 -std=c18 -Wl,-z,muldefs -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc`

`816.nab_s: basepeak = yes`

`881.neutron_s: basepeak = yes`

C++ benchmarks:

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 14.4

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_fp_peak = 14.7

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Nov-2025

Peak Optimization Flags (Continued)

803.sph_exa_s: basepeak = yes

857.namd_s: basepeak = yes

867.nest_s: -m64 -std=c++17 -Wl,-z,muldefs -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

872.marian_s: basepeak = yes

Fortran benchmarks:

800.pot3d_s: -m64 -stand f18 -Wl,-z,muldefs -DSPEC_OPENMP -fiopenmp
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

820.cloverleaf_s: basepeak = yes

822.palm_s: basepeak = yes

849.fotonik3d_s: basepeak = yes

865.roms_s: basepeak = yes

Benchmarks using both C and C++:

809.cactus_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.html>

<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.xml>

<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-07 20:23:19-0500.

Report generated on 2026-05-04 23:29:30 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.