



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 7.60

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 6573


Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2025

Tested by: Dell Inc.

Software Availability: Nov-2025

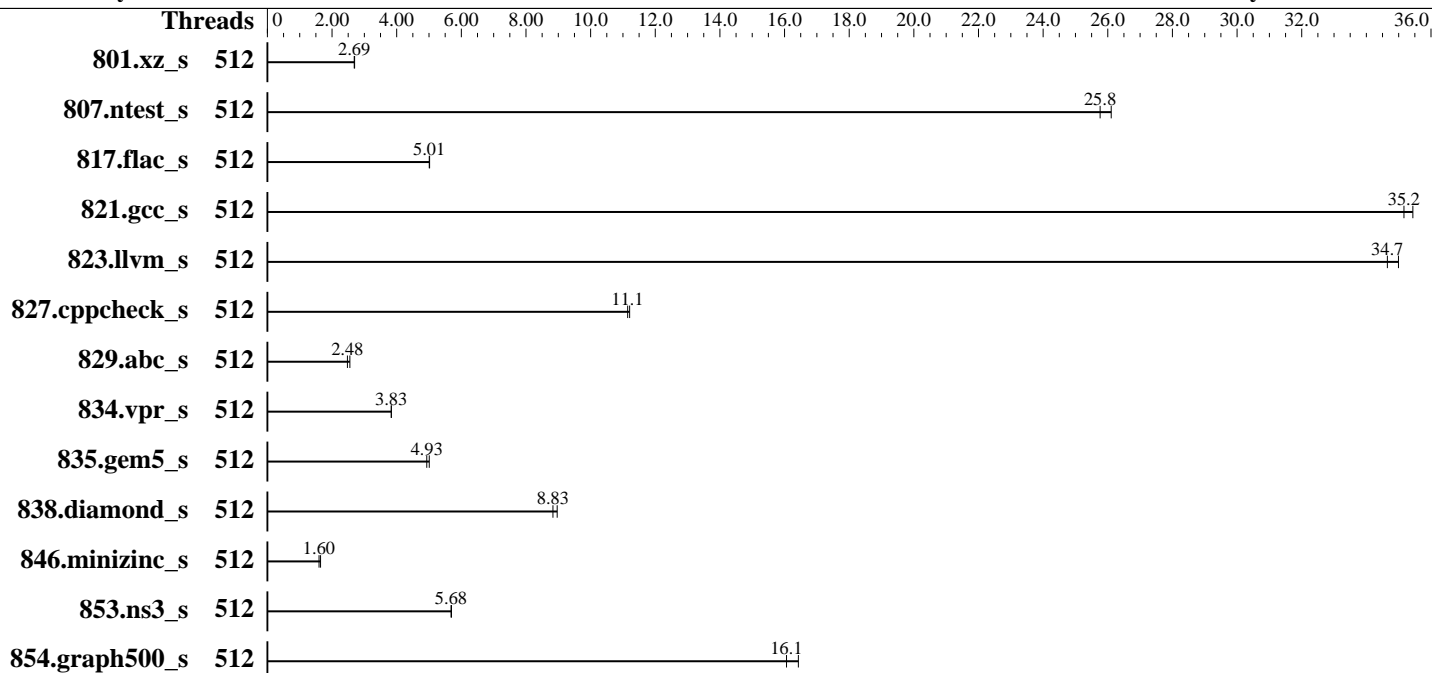

Hardware

CPU Name: Intel Xeon 6980P
 Max MHz: 3900
 Nominal: 2000
 Enabled: 256 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 504 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 250 GB on tmpfs
 Cooling: Air
 Other: None

Software

OS: SUSE Linux Enterprise Server 16.0
 6.12.0-160000.5-default
 Compiler: C/C++: Version 2025.3 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2025.3 of Intel Fortran
 Compiler for Linux
 Compiler Category: Vendor
 Firmware: Version 1.1.6 released Nov-2025
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator v5.3
 Power Management: BIOS set to prefer performance at the cost of
 additional power usage.



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 7.60

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
801.xz_s	512	<u>220</u>	<u>2.69</u>	219	2.70									
807.nctest_s	512	43.7	26.1	<u>44.2</u>	<u>25.8</u>									
817.flac_s	512	346	5.02	<u>347</u>	<u>5.01</u>									
821.gcc_s	512	58.4	35.4	<u>58.9</u>	<u>35.2</u>									
823.llvm_s	512	40.3	35.0	<u>40.7</u>	<u>34.7</u>									
827.cppcheck_s	512	99.9	11.2	<u>100</u>	<u>11.1</u>									
829.abc_s	512	<u>336</u>	<u>2.48</u>	326	2.55									
834.vpr_s	512	249	3.83	<u>249</u>	<u>3.83</u>									
835.gem5_s	512	<u>231</u>	<u>4.93</u>	227	5.01									
838.diamond_s	512	<u>113</u>	<u>8.83</u>	112	8.97									
846.minizinc_s	512	<u>419</u>	<u>1.60</u>	407	1.64									
853.ns3_s	512	202	5.70	<u>203</u>	<u>5.68</u>									
854.graph500_s	512	<u>38.0</u>	<u>16.1</u>	37.2	16.4									

SPECspeed®2026_int_base = 7.60

SPECspeed®2026_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu2026-0.902.0-ic2025p3/lib"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the CentOS Stream 9, and the system compiler gcc 11.5.0
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
Benchmark run from a 250 GB ramdisk created with the cmd: "mount -t tmpfs -o size=250G tmpfs /mnt/ramdisk"



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 7.60

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Nov-2025

Platform Notes

BIOS Settings:

LLC Prefetch : Enabled

System Profile : Custom

CPU Power Management : Maximum Performance

C1E : Disabled

C-States : Autonomous

Latency Optimized Mode : Enabled

Energy Efficient Policy : Performance

DIMM Self Healing -

on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2026-0.902.0-ic2025p3/bin/sysinfo

Rev: 069f95da7e7f5d81b2ce48a82150e54f

running on R7701AP-R770AP Sun Feb 8 06:37:53 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)
11. Services, from systemctl list-unit-files
12. Linux kernel boot-time arguments, from /proc/cmdline
13. cpupower frequency-info
14. sysctl
15. /sys/kernel/mm/transparent_hugepage
16. /sys/kernel/mm/transparent_hugepage/khugepaged
17. OS release
18. Disk information
19. /sys/devices/virtual/dmi/id
20. dmidecode
21. BIOS

1. uname -srvm

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 7.60

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Platform Notes (Continued)

Linux 6.12.0-160000.5-default #1 SMP PREEMPT_DYNAMIC Wed Sep 10 15:26:25 UTC 2025 (3545bbd) x86_64

```

-----
2. w
   06:37:54 up 3 min,  1 user,  load average: 3.55, 5.02, 2.36
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1    -             06:35   34.00s  1.19s  ?     /bin/bash
/home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=7.0_T04 --output_format html,pdf,txt
--tune base

```

```

-----
3. Username
   From environment variable $USER:  root

```

```

-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) unlimited
data seg size                (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 6184962
max locked memory            (kbytes, -l) 8192
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority           (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
max user processes           (-u) 6184962
virtual memory                (kbytes, -v) unlimited
file locks                    (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=47
login -- root
-bash
/bin/bash /home/DellFiles/bin/DELL_speed.sh --tune base
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed --tune base
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed --tune base
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=7.0_T04 --output_format
html,pdf,txt --tune base
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=7.0_T04 --output_format
html,pdf,txt --tune base
runcpu --nobuild --reportable --action validate --define default-platform-flags -c

```

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 7.60

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Platform Notes (Continued)

```
ic2025.3-graniterapids-cpu2026-0.902-speed-20260121.cfg --threads 512 --define cores=256 --tune base,peak
-o all --define intsppedaffinity --define smt-on --define drop_caches --iterations 2 --define base_only
--define DL-VERS=7.0_T04 --output_format html,pdf,txt --tune base intspped
runcpu --nobuild --reportable --action validate --define default-platform-flags --configfile
ic2025.3-graniterapids-cpu2026-0.902-speed-20260121.cfg --threads 512 --define cores=256 --tune base,peak
--output_format all --define intsppedaffinity --define smt-on --define drop_caches --iterations 2 --define
base_only --define DL-VERS=7.0_T04 --output_format html,pdf,txt --tune base --nopower --runmode speed
--tune base --size refspped intspped --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.001/templogs/preenv.intspped.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2026-0.902.0-ic2025p3
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6980P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x10003f3
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi spectre_v2_user
cpu cores     : 128
siblings       : 256
2 physical ids (chips)
512 processors (hardware threads)
physical id 0: core ids 0-42,64-106,128-169
physical id 1: core ids 0-42,64-105,128-170
physical id 0: apicids 0-85,128-213,256-339
physical id 1: apicids 512-597,640-723,768-853
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```
-----
7. lscpu

From lscpu from util-linux 2.41.1:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 512
On-line CPU(s) list:   0-511
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) 6980P
CPU family:             6
Model:                  173
Thread(s) per core:    2
```

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 7.60

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Platform Notes (Continued)

Core(s) per socket:	128
Socket(s):	2
Stepping:	1
BogoMIPS:	4000.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization:	VT-x
L1d cache:	12 MiB (256 instances)
L1i cache:	16 MiB (256 instances)
L2 cache:	512 MiB (256 instances)
L3 cache:	1008 MiB (2 instances)
NUMA node(s):	2
NUMA node0 CPU(s):	0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46 , 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90 , 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 1 26, 128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158 , 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 1 92, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224 , 226, 228, 230, 232, 234, 236, 238, 240, 242, 244, 246, 248, 250, 252, 254, 256, 2 58, 260, 262, 264, 266, 268, 270, 272, 274, 276, 278, 280, 282, 284, 286, 288, 290 , 292, 294, 296, 298, 300, 302, 304, 306, 308, 310, 312, 314, 316, 318, 320, 322, 3 24, 326, 328, 330, 332, 334, 336, 338, 340, 342, 344, 346, 348, 350, 352, 354, 356 , 358, 360, 362, 364, 366, 368, 370, 372, 374, 376, 378, 380, 382, 384, 386, 388, 3 90, 392, 394, 396, 398, 400, 402, 404, 406, 408, 410, 412, 414, 416, 418, 420, 422 , 424, 426, 428, 430, 432, 434, 436, 438, 440, 442, 444, 446, 448, 450, 452, 454, 4 56, 458, 460, 462, 464, 466, 468, 470, 472, 474, 476, 478, 480, 482, 484, 486, 488 , 490, 492, 494, 496, 498, 500, 502, 504, 506, 508, 510
NUMA node1 CPU(s):	1, 3, 5, 7, 9, 11, 13, 15, 17, 19, 21, 23, 25, 27, 29, 31, 33, 35, 37, 39, 41, 43, 45, 47 , 49, 51, 53, 55, 57, 59, 61, 63, 65, 67, 69, 71, 73, 75, 77, 79, 81, 83, 85, 87, 89, 91

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 7.60

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Platform Notes (Continued)

, 93, 95, 97, 99, 101, 103, 105, 107, 109, 111, 113, 115, 117, 119, 121, 123, 125, 127, 129, 131, 133, 135, 137, 139, 141, 143, 145, 147, 149, 151, 153, 155, 157, 159, 161, 163, 165, 167, 169, 171, 173, 175, 177, 179, 181, 183, 185, 187, 189, 191, 193, 195, 197, 199, 201, 203, 205, 207, 209, 211, 213, 215, 217, 219, 221, 223, 225, 227, 229, 231, 233, 235, 237, 239, 241, 243, 245, 247, 249, 251, 253, 255, 257, 259, 261, 263, 265, 267, 269, 271, 273, 275, 277, 279, 281, 283, 285, 287, 289, 291, 293, 295, 297, 299, 301, 303, 305, 307, 309, 311, 313, 315, 317, 319, 321, 323, 325, 327, 329, 331, 333, 335, 337, 339, 341, 343, 345, 347, 349, 351, 353, 355, 357, 359, 361, 363, 365, 367, 369, 371, 373, 375, 377, 379, 381, 383, 385, 387, 389, 391, 393, 395, 397, 399, 401, 403, 405, 407, 409, 411, 413, 415, 417, 419, 421, 423, 425, 427, 429, 431, 433, 435, 437, 439, 441, 443, 445, 447, 449, 451, 453, 455, 457, 459, 461, 463, 465, 467, 469, 471, 473, 475, 477, 479, 481, 483, 485, 487, 489, 491, 493, 495, 497, 499, 501, 503, 505, 507, 509, 511

Vulnerability Gather data sampling:	Not affected
Vulnerability Indirect target selection:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swappgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsa:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	12M	12	Data	1	64	1	64
L1i	64K	16M	16	Instruction	1	64	1	64
L2	2M	512M	16	Unified	2	2048	1	64
L3	504M	1008M	16	Unified	3	516096	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus:

0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186,

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 7.60

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Platform Notes (Continued)

188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236,238,240,242,244,246,248,250,252,254,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,308,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,360,362,364,366,368,370,372,374,376,378,380,382,384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,436,438,440,442,444,446,448,450,452,454,456,458,460,462,464,466,468,470,472,474,476,478,480,482,484,486,488,490,492,494,496,498,500,502,504,506,508,510

node 0 size: 772610 MB

node 0 free: 741659 MB

node 1 cpus:

1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49,51,53,55,57,59,61,63,65,67,69,71,73,75,77,79,81,83,85,87,89,91,93,95,97,99,101,103,105,107,109,111,113,115,117,119,121,123,125,127,129,131,133,135,137,139,141,143,145,147,149,151,153,155,157,159,161,163,165,167,169,171,173,175,177,179,181,183,185,187,189,191,193,195,197,199,201,203,205,207,209,211,213,215,217,219,221,223,225,227,229,231,233,235,237,239,241,243,245,247,249,251,253,255,257,259,261,263,265,267,269,271,273,275,277,279,281,283,285,287,289,291,293,295,297,299,301,303,305,307,309,311,313,315,317,319,321,323,325,327,329,331,333,335,337,339,341,343,345,347,349,351,353,355,357,359,361,363,365,367,369,371,373,375,377,379,381,383,385,387,389,391,393,395,397,399,401,403,405,407,409,411,413,415,417,419,421,423,425,427,429,431,433,435,437,439,441,443,445,447,449,451,453,455,457,459,461,463,465,467,469,471,473,475,477,479,481,483,485,487,489,491,493,495,497,499,501,503,505,507,509,511

node 1 size: 773857 MB

node 1 free: 771319 MB

node distances:

```
node      0      1
0:       10     21
1:       21     10
```

9. /proc/meminfo
MemTotal: 1583583508 kB

'who -r' did not return a run level

10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)
Default Target Status
multi-user running

11. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audit-rules auditd bluetooth chronyd dbus-broker firewalld gdm getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nvme-fc-boot-connections nvme-fc-autoconnect rollback rsyslog smartd soft-reboot-cleanup systemd-pstore wpa_supplicant wtmpdb-update-boot
enabled-runtime	systemd-remount-fs
disabled	accounts-daemon blk-availability bluetooth-mesh boot-sysctl ca-certificates

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 7.60

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 6573

Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2025

Tested by: Dell Inc.

Software Availability: Nov-2025

Platform Notes (Continued)

```

ca-certificates-setup chrony-wait console-getty cups debug-shell dnsmasq
gnome-remote-desktop gnome-remote-desktop-configuration gpm grub2-once hwloc-dump-hwdata
issue-add-ssh-keys kea-ctrl-agent kea-dhcp-ddns kea-dhcp4 kea-dhcp6 kernel-sysctl
kexec-load lastlog2-import lunmask lvm-devices-import man-db-create multipathd named
nftables nis-domainname pkcs11_eventmgr rpmconfigcheck rsyncd rtkit-daemon serial-getty@
setup-systemd-proxy-env smartd_generate_opts snmpd snmptrapd speech-dispatcherd sshd
systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd systemd-udev-load-credentials udisks2 upower
wpa_supplicant@
indirect pcsd systemd-userdbd

```

12. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.12.0-160000.5-default
root=UUID=4044a3e4-4dde-48c8-8c55-1a2d4847af52
mitigations=auto
quiet
security=selinux
selinux=1

```

13. cpupower frequency-info

```

analyzing CPU 417:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

14. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                    60
vm.watermark_boost_factor       15000

```

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 7.60

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Platform Notes (Continued)

```
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
-----
15. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
```

```
-----
16. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

```
-----
17. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 16.0
```

```
-----
18. Disk information
SPEC is set to: /mnt/ramdisk/cpu2026-0.902.0-ic2025p3
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs            tmpfs 250G  13G  238G  6% /mnt/ramdisk
```

```
-----
19. /sys/devices/virtual/dmi/id
Vendor:          Dell Inc.
Product:         PowerEdge R770AP
Product Family: PowerEdge
Serial:          R7701AP
```

```
-----
20. dmidecode
Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
13x 00CE063200CE M321R8GA0PB1-CCPQC 64 GB 2 rank 6400
11x 00CE063200CE M321R8GA0PB2-CCPKC 64 GB 2 rank 6400
```

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 7.60

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Nov-2025

Platform Notes (Continued)

21. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.
BIOS Version: 1.1.6
BIOS Date: 11/06/2025
BIOS Revision: 1.1

Compiler Version Notes

=====
C | 854.graph500_s(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
=====

=====
C++ | 807.ntest_s(base) 827.cppcheck_s(base) 853.ns3_s(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
=====

=====
C++, C | 801.xz_s(base) 817.flac_s(base) 821.gcc_s(base) 823.llvm_s(base)
| 829.abc_s(base) 834.vpr_s(base) 835.gem5_s(base) 838.diamond_s(base)
| 846.minizinc_s(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 7.60

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 6573

Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2025

Tested by: Dell Inc.

Software Availability: Nov-2025

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Base Portability Flags

```

801.xz_s: -DSPEC_LP64
807.ntest_s: -DSPEC_LP64
817.flac_s: -DSPEC_LP64
821.gcc_s: -DSPEC_LP64
823.llvm_s: -DSPEC_LP64
827.cppcheck_s: -DSPEC_LP64
829.abc_s: -DSPEC_LP64
834.vpr_s: -DSPEC_LP64
835.gem5_s: -DSPEC_LP64
838.diamond_s: -DSPEC_LP64
846.minizinc_s: -DSPEC_LP64
853.ns3_s: -DSPEC_LP64
854.graph500_s: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -std=c18 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

```

C++ benchmarks:

```

807.ntest_s: -m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib
-ljemalloc

827.cppcheck_s: -m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-pthread -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

```

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 7.60

PowerEdge R770AP (Intel Xeon 6980P)

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Nov-2025

Base Optimization Flags (Continued)

```
853.ns3_s: -m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Benchmarks using both C and C++:

```
801.xz_s: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-pthread -L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

817.flac_s: Same as 801.xz_s

```
821.gcc_s: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

823.llvm_s: Same as 801.xz_s

829.abc_s: Same as 821.gcc_s

834.vpr_s: Same as 821.gcc_s

835.gem5_s: Same as 801.xz_s

838.diamond_s: Same as 801.xz_s

846.minizinc_s: Same as 801.xz_s

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.html>
<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.xml>
<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-08 07:37:53-0500.

Report generated on 2026-05-04 23:29:38 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.