



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 8.20

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

SPECspeed®2026_int_peak = 8.20

CPU2026 License: 6573


Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Nov-2024

Tested by: Dell Inc.

Software Availability: Jan-2026

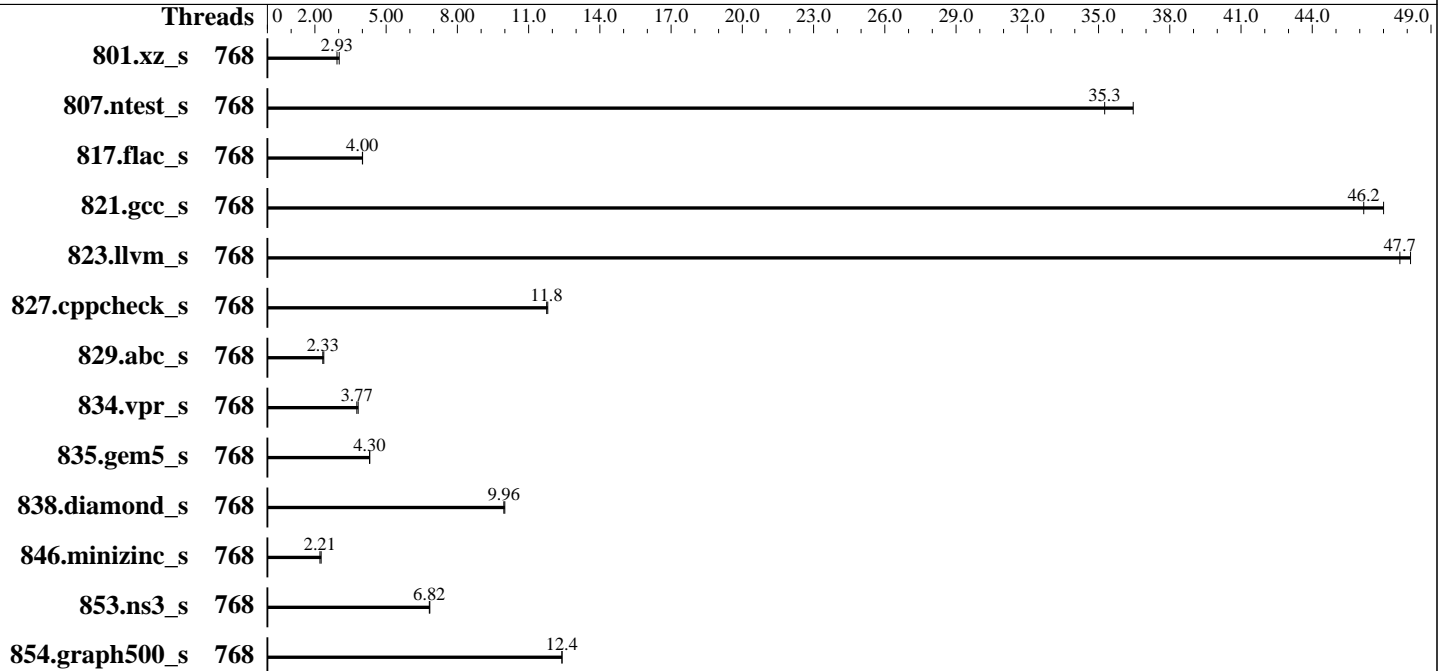

Hardware

CPU Name: AMD EPYC 9965
 Max MHz: 3700
 Nominal: 2250
 Enabled: 384 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 384 MB I+D on chip per chip, 32 MB shared / 16 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 1.5 TB NVMe SSD
 Cooling: Air
 Other: None

Software

OS: Ubuntu 24.04.2 LTS
 6.8.0-55-generic
 Compiler: C/C++: Version 5.1.0 of AOCC
 Fortran: Flang v22
 Compiler Category: Vendor
 Firmware: Version 1.5.3 released Oct-2025
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2026_int_base = 8.20

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

SPECSpeed®2026_int_peak = 8.20

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Nov-2024
Software Availability: Jan-2026

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
801.xz_s	768	202	2.93	195	3.02			768	202	2.93	195	3.02		
807.ntest_s	768	32.3	35.3	31.3	36.5			768	32.3	35.3	31.3	36.5		
817.flac_s	768	434	4.00	433	4.01			768	434	4.00	433	4.01		
821.gcc_s	768	44.0	47.0	44.8	46.2			768	44.0	47.0	44.8	46.2		
823.llvm_s	768	29.6	47.7	29.3	48.1			768	29.6	47.7	29.3	48.1		
827.cppcheck_s	768	95.2	11.8	94.8	11.8			768	95.2	11.8	94.8	11.8		
829.abc_s	768	350	2.38	356	2.33			768	350	2.38	356	2.33		
834.vpr_s	768	250	3.82	253	3.77			768	250	3.82	253	3.77		
835.gem5_s	768	264	4.31	265	4.30			768	264	4.31	265	4.30		
838.diamond_s	768	100	10.0	101	9.96			768	100	10.0	101	9.96		
846.minizinc_s	768	303	2.21	296	2.26			768	303	2.21	296	2.26		
853.ns3_s	768	169	6.84	169	6.82			768	169	6.84	169	6.82		
854.graph500_s	768	49.2	12.4	49.3	12.4			768	49.2	12.4	49.3	12.4		

SPECSpeed®2026_int_base = **8.20**

SPECSpeed®2026_int_peak = **8.20**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>
Flang v22 is available at <https://flang.llvm.org/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 8.20

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

SPECspeed®2026_int_peak = 8.20

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Nov-2024

Software Availability: Jan-2026

Operating System Notes (Continued)

```
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-767"
LD_LIBRARY_PATH =
"/home/cpu2026rc2/amd_speed_aocc510_flang22_znver5_A_lib/lib:/home/cpu20
26rc2/amd_speed_aocc510_flang22_znver5_A_lib/lib32:"
MALLOCONF = "retain:true"
```

General Notes

Binaries were compiled on a system with an AMD EPYC 9754 CPU + 768 GiB Memory using Ubuntu 24.04

Platform Notes

```
BIOS Settings:
    Virtualization Technology : Disabled
    NUMA Nodes Per Socket : 4

    System Profile : Custom
    C-States : Disabled
    Memory Patrol Scrub : Disabled
    PCI ASPM L1 Link Power Management : Disabled
    Periodic Directory Rinse Tuning : Blended
    Determinism Control : Manual
    Determinism Slider : Power Determinism
    Optimizer Mode : Enabled
    Algorithm Performance Boost Disable : Enabled
    ApbDis Fixed DF P-State : P0
    Adaptive Allocation : Enabled
    Dram Refresh Delay : Performance
    DIMM Self Healing -
    on Uncorrectable Memory Error : Disabled
```

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 8.20

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

SPECspeed®2026_int_peak = 8.20

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Nov-2024

Software Availability: Jan-2026

Platform Notes (Continued)

sysinfo program /home/cpu2026rc2/bin/sysinfo
Rev: 069f95da7e7f5d81b2ce48a82150e54f
running on SLR7753-R7725 Sun Feb 8 04:17:21 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.6)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -srvm
Linux 6.8.0-55-generic #57-Ubuntu SMP PREEMPT_DYNAMIC Wed Feb 12 23:42:21 UTC 2025 x86_64
```

```
2. w
04:17:21 up 1 day, 14:39, 2 users, load average: 0.19, 0.22, 0.11
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root      tty1     -              Fri13       37:13m     0.07s    0.02s    -bash
root      -        100.71.148.183 04:01       38:39m     0.00s    0.08s    sshd: root@pts/0
```

3. Username

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 8.20

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

SPECspeed®2026_int_peak = 8.20

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Nov-2024

Software Availability: Jan-2026

Platform Notes (Continued)

From environment variable \$USER: root

4. ulimit -a

```

time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)      0
memory(kbytes)         unlimited
locked memory(kbytes) 2097152
process                6187513
nofiles                1024
vmemory(kbytes)       unlimited
locks                  unlimited
rtprio                 0

```

5. sysinfo process ancestry

```

/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/0
-bash
/bin/bash /home/DellFiles/bin/DELL_speed.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh speed --define DL-VERS=7.0_T01 --output_format
html,pdf,txt
python3 ./run_amd_speed_aocc510_flang22_znver5_A1.py
/bin/bash ./amd_speed_aocc510_flang22_znver5_A1.sh
runcpu --config amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 2 --define
DL-VERS=7.0_T01 --output_format html,pdf,txt intspeer
runcpu --configfile amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 2 --define
DL-VERS=7.0_T01 --output_format html,pdf,txt --nopower --runmode speed --tune base --size
test:train:refspeed intspeer --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.001/templogs/preenv.intspeer.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026rc2

```

6. /proc/cpuinfo

```

model name      : AMD EPYC 9965 192-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 17
stepping       : 0
microcode      : 0xb101054

```

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 8.20

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

SPECspeed®2026_int_peak = 8.20

CPU2026 License: 6573

Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Nov-2024

Tested by: Dell Inc.

Software Availability: Jan-2026

Platform Notes (Continued)

```

bugs                : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size           : 192 4K pages
cpu cores          : 192
siblings           : 384
2 physical ids (chips)
768 processors (hardware threads)
physical id 0: core ids 0-191
physical id 1: core ids 0-191
physical id 0: apicids 0-383
physical id 1: apicids 512-895

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                768
On-line CPU(s) list:   0-767
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       AMD
Model name:            AMD EPYC 9965 192-Core Processor
BIOS Model name:      AMD EPYC 9965 192-Core Processor          CPU @ 2.2GHz
BIOS CPU family:      107
CPU family:           26
Model:                17
Thread(s) per core:   2
Core(s) per socket:   192
Socket(s):            2
Stepping:              0
Frequency boost:      enabled
CPU(s) scaling MHz:   61%
CPU max MHz:          3700.1951
CPU min MHz:          1500.0000
BogoMIPS:             4493.37

```

```

Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd nba perfmon_v2

```

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 8.20

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

SPECspeed®2026_int_peak = 8.20

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Nov-2024
Software Availability: Jan-2026

Platform Notes (Continued)

```
ibrs ibpb stibp ibrs_enhanced vmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca avx512_vp2intersect
```

```
flush_lld debug_swap
Lld cache: 18 MiB (384 instances)
Lli cache: 12 MiB (384 instances)
L2 cache: 384 MiB (384 instances)
L3 cache: 768 MiB (24 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-191,384-575
NUMA node1 CPU(s): 192-383,576-767
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
Lld	48K	18M	12	Data	1	64	1	64
Lli	32K	12M	8	Instruction	1	64	1	64
L2	1M	384M	16	Unified	2	1024	1	64
L3	32M	768M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0-191,384-575

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 8.20

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

SPECspeed®2026_int_peak = 8.20

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Nov-2024
Software Availability: Jan-2026

Platform Notes (Continued)

```
node 0 size: 773017 MB
node 0 free: 758255 MB
node 1 cpus: 192-383,576-767
node 1 size: 773934 MB
node 1 free: 770691 MB
node distances:
node 0 1
0: 10 32
1: 32 10
```

9. /proc/meminfo
MemTotal: 1584079204 kB

10. who -r
run-level 3 Feb 6 13:37

11. Systemd service manager version: systemd 255 (255.4-lubuntu8.6)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	apparmor apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lm-sensors lvm2-monitor multipathd networkd-dispatcher nvme-fc-boot-connections nvme-autoconnect open-iscsi pollinate secureboot-db setvtrgb systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald tuned
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell fio iscsid serial-getty@ ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext systemd-time-wait-sync upower
indirect	systemd-sysupdate systemd-sysupdate-reboot uidd
masked	cryptdisks cryptdisks-early hwclock multipath-tools-boot sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.8.0-55-generic
root=UUID=12012b0a-8b6b-4db0-98ad-44c145a96bdb
ro

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 8.20

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

SPECspeed®2026_int_peak = 8.20

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Nov-2024

Software Availability: Jan-2026

Platform Notes (Continued)

```

-----
14. cpupower frequency-info
   analyzing CPU 320:
     current policy: frequency should be within 1.50 GHz and 2.25 GHz.
                       The governor "performance" may decide which speed to use
                       within this range.
   boost state support:
     Supported: yes
     Active: yes
     Boost States: 0
     Total States: 3
     Pstate-P0: 2250MHz

```

```

-----
15. tuned-adm active
   Current active profile: latency-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     0
vm.compaction_proactiveness   20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     3
vm.dirty_bytes                0
vm.dirty_expire_centisecs    3000
vm.dirty_ratio                8
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio        1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 8.20

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

SPECspeed®2026_int_peak = 8.20

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Nov-2024

Software Availability: Jan-2026

Platform Notes (Continued)

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```

alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

```

19. OS release

```

From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.2 LTS

```

20. Disk information

```

SPEC is set to: /home/cpu2026rc2
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0nlp2 ext4 1.5T 32G 1.4T 3% /

```

21. /sys/devices/virtual/dmi/id

```

Vendor: Dell Inc.
Product: PowerEdge R7725
Product Family: PowerEdge
Serial: SLR7753

```

22. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```

23x 80AD000080AD HMC94AHBRA277N 64 GB 2 rank 6400
1x 80AD000080AD HMC94AHBRA480N 64 GB 2 rank 6400

```

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```

BIOS Vendor: Dell Inc.
BIOS Version: 1.5.3
BIOS Date: 10/29/2025
BIOS Revision: 1.5

```



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 8.20

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

SPECspeed®2026_int_peak = 8.20

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Nov-2024
Software Availability: Jan-2026

Compiler Version Notes

=====
C | 854.graph500_s(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====
C++ | 807.ntest_s(base) 827.cppcheck_s(base) 853.ns3_s(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====
C++, C | 801.xz_s(base) 817.flac_s(base) 821.gcc_s(base) 823.llvm_s(base)
| 829.abc_s(base) 834.vpr_s(base) 835.gem5_s(base) 838.diamond_s(base)
846.minizinc_s(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Benchmarks using both C and C++:
clang++ clang

Base Portability Flags

801.xz_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 8.20

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

SPECspeed®2026_int_peak = 8.20

CPU2026 License: 6573

Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Nov-2024

Tested by: Dell Inc.

Software Availability: Jan-2026

Base Portability Flags (Continued)

```

807.ntest_s: -DSPEC_LP64
817.flac_s: -DSPEC_LP64
821.gcc_s: -DSPEC_LP64
823.llvm_s: -DSPEC_LP64
827.cppcheck_s: -DSPEC_LP64
829.abc_s: -DSPEC_LP64
834.vpr_s: -fno-finite-math-only -DSPEC_LP64
835.gem5_s: -fno-finite-math-only -DSPEC_LP64
838.diamond_s: -DSPEC_LP64
846.minizinc_s: -DSPEC_LP64
853.ns3_s: -fno-finite-math-only -DSPEC_LP64
854.graph500_s: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3 -flto
-march=znver5 -fveclib=AMDLIBM -ffast-math -zopt -fremap-arrays
-fstrip-mining -fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50
-fopenmp -DSPEC_OPENMP -lamdalloc -lamdlibm -fopenmp=libomp -lomp

```

C++ benchmarks:

```

-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -fopenmp -DSPEC_OPENMP
-fvirtual-function-elimination -fvisibility=hidden -lamdalloc
-lamdlibm -fopenmp=libomp -lomp

```

Benchmarks using both C and C++:

```

-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -zopt -fremap-arrays -fstrip-mining
-fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-fopenmp -DSPEC_OPENMP -fvirtual-function-elimination
-fvisibility=hidden -lamdalloc -lamdlibm -fopenmp=libomp -lomp

```



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_int_base = 8.20

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

SPECspeed®2026_int_peak = 8.20

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Nov-2024

Software Availability: Jan-2026

Base Other Flags

C benchmarks:

-Wno-return-type

Benchmarks using both C and C++:

-Wno-return-type

Peak Optimization Flags

C benchmarks:

854.graph500_s: basepeak = yes

C++ benchmarks:

807.ntest_s: basepeak = yes

827.cppcheck_s: basepeak = yes

853.ns3_s: basepeak = yes

Benchmarks using both C and C++:

801.xz_s: basepeak = yes

817.flac_s: basepeak = yes

821.gcc_s: basepeak = yes

823.llvm_s: basepeak = yes

829.abc_s: basepeak = yes

834.vpr_s: basepeak = yes

835.gem5_s: basepeak = yes

838.diamond_s: basepeak = yes

846.minizinc_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/aocc-flags.html>

<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html>



SPEC CPU[®]2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed[®]2026_int_base = 8.20

PowerEdge R7725 (AMD EPYC 9965 192-Core Processor)

SPECspeed[®]2026_int_peak = 8.20

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Nov-2024

Software Availability: Jan-2026

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/aocc-flags.xml>

<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU[®]2026 v0.902.0 on 2026-02-07 23:17:21-0500.

Report generated on 2026-05-04 23:29:45 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.