



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 7.74

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6573


Test Date: Feb-2026

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2026

Tested by: Dell Inc.

Software Availability: Nov-2025

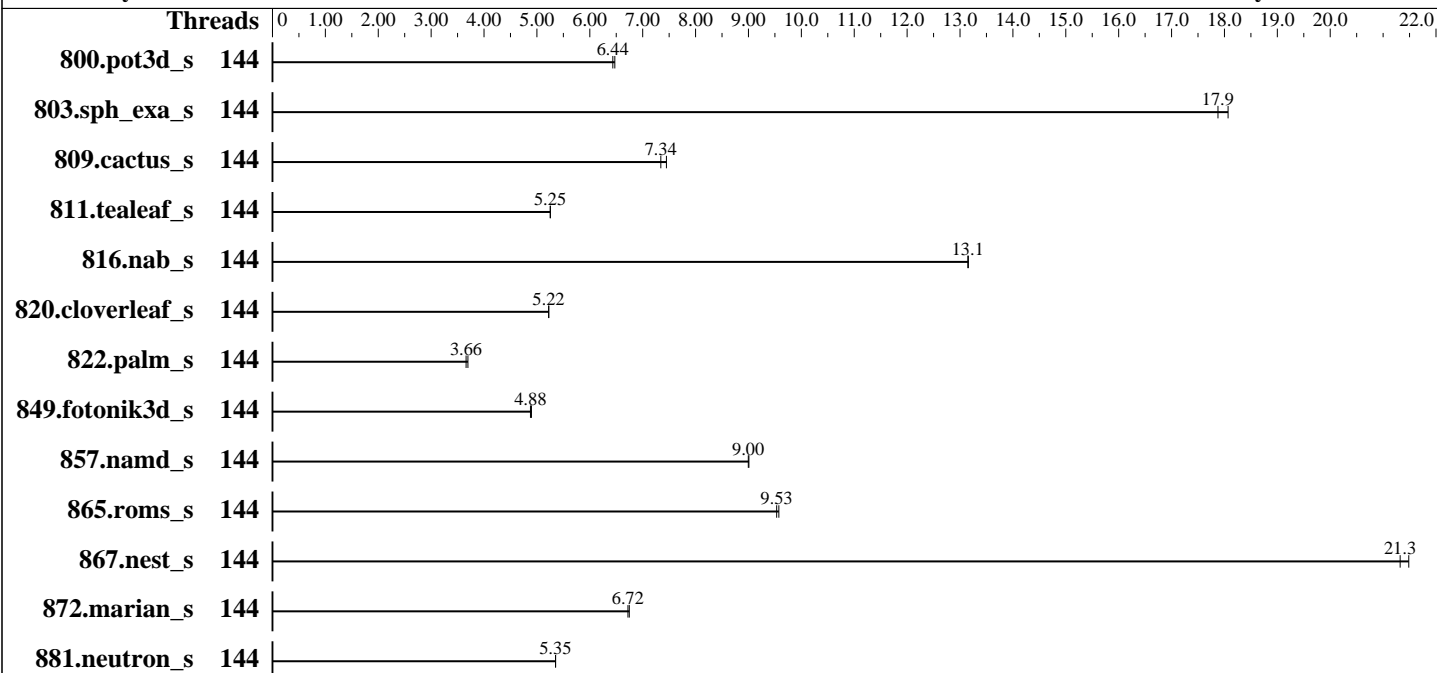

Hardware

CPU Name: Intel Xeon 6776P-B
 Max MHz: 3500
 Nominal: 2300
 Enabled: 72 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 288 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (8 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 110 GB on tmpfs
 Cooling: Air
 Other: None

Software

OS: Red Hat Enterprise Linux 10.0 (Coughlan)
 6.12.0-55.9.1.el10_0.x86_64
 Compiler: C/C++: Version 2025.3 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2025.3 of Intel Fortran
 Compiler for Linux
 Compiler Category: Vendor
 Firmware: Version 1.1.3 released Feb-2026
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator v5.3
 Power Management: BIOS set to prefer performance at the cost of
 additional power usage.



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 7.74

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Mar-2026
Software Availability: Nov-2025

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
800.pot3d_s	144	<u>105</u>	<u>6.44</u>	104	6.47									
803.sph_exa_s	144	<u>69.2</u>	<u>17.9</u>	68.5	18.1									
809.cactus_s	144	151	7.45	<u>153</u>	<u>7.34</u>									
811.tealeaf_s	144	<u>106</u>	<u>5.25</u>	106	5.25									
816.nab_s	144	85.6	13.2	<u>85.6</u>	<u>13.1</u>									
820.cloverleaf_s	144	<u>164</u>	<u>5.22</u>	164	5.22									
822.palm_s	144	332	3.70	<u>335</u>	<u>3.66</u>									
849.fotonik3d_s	144	135	4.90	<u>135</u>	<u>4.88</u>									
857.namd_s	144	161	9.01	<u>161</u>	<u>9.00</u>									
865.roms_s	144	<u>114</u>	<u>9.53</u>	114	9.57									
867.nest_s	144	101	21.5	<u>101</u>	<u>21.3</u>									
872.marian_s	144	160	6.75	<u>161</u>	<u>6.72</u>									
881.neutron_s	144	<u>152</u>	<u>5.35</u>	152	5.35									

SPECspeed®2026_fp_base = 7.74

SPECspeed®2026_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu2026-0.902.0-ic2025p3/lib"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the CentOS Stream 9, and the system compiler gcc 11.5.0
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>
Benchmark run from a 110 GB ramdisk created with the cmd: "mount -t tmpfs -o size=110G tmpfs /mnt/ramdisk"



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 7.74

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Mar-2026

Software Availability: Nov-2025

Platform Notes

BIOS Settings:

LLC Prefetch : Enabled

System Profile : Custom

Latency Optimized Mode : Enabled

CPU Interconnect Bus -

Link Power Management : Disabled

Memory Paging Policy : Closed Paging

Sysinfo program /mnt/ramdisk/cpu2026-0.902.0-ic2025p3/bin/sysinfo

Rev: 069f95da7e7f5d81b2ce48a82150e54f

running on P404206-XR8720t Fri Feb 6 18:50:38 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 257 (257-9.e110_0.1-g8cd5633)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -srvm

Linux 6.12.0-55.9.1.e110_0.x86_64 #1 SMP PREEMPT_DYNAMIC Tue Mar 25 09:14:09 EDT 2025 x86_64

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 7.74

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Mar-2026
Software Availability: Nov-2025

Platform Notes (Continued)

```

-----
2. w
   18:50:38 up 1:53, 2 users, load average: 58.63, 32.59, 31.26
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root      tty1    16:58   1:49m  2.54s  ?    /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh
speed --define DL-VERS=7.0_T03 --output_format html, pdf, txt --tune base
root      16:58   1:53m  0.00s  0.28s /usr/lib/systemd/systemd --user

```

```

-----
3. Username
   From environment variable $USER: root

```

```

-----
4. ulimit -a
   real-time non-blocking time (microseconds, -R) unlimited
   core file size              (blocks, -c) 0
   data seg size                (kbytes, -d) unlimited
   scheduling priority          (-e) 0
   file size                    (blocks, -f) unlimited
   pending signals              (-i) 2058840
   max locked memory            (kbytes, -l) 8192
   max memory size              (kbytes, -m) unlimited
   open files                   (-n) 1024
   pipe size                    (512 bytes, -p) 8
   POSIX message queues         (bytes, -q) 819200
   real-time priority           (-r) 0
   stack size                   (kbytes, -s) unlimited
   cpu time                     (seconds, -t) unlimited
   max user processes           (-u) 2058840
   virtual memory               (kbytes, -v) unlimited
   file locks                   (-x) unlimited

```

```

-----
5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize=47 rhgb
   login -- root
   -bash
   /bin/bash /home/DellFiles/bin/DELL_speed.sh --tune base
   /bin/bash /home/DellFiles/bin/dell-run-main.sh speed --tune base
   /bin/bash /home/DellFiles/bin/dell-run-main.sh speed --tune base
   /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=7.0_T03 --output_format
   html, pdf, txt --tune base
   /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=7.0_T03 --output_format
   html, pdf, txt --tune base
   runcpu --nobuild --reportable --action validate --define default-platform-flags -c
   ic2025.3-graniterapids-cpu2026-0.902-speed-20260121.cfg --threads 144 --define cores=72 --tune base, peak

```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 7.74

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Mar-2026
Software Availability: Nov-2025

Platform Notes (Continued)

```

-o all --define smt-on --define drop_caches --iterations 2 --define base_only --define DL-VERS=7.0_T03
--output_format html,pdf,txt --tune base fpspeed
runcpu --nobuild --reportable --action validate --define default-platform-flags --configfile
ic2025.3-graniterapids-cpu2026-0.902-speed-20260121.cfg --threads 144 --define cores=72 --tune base,peak
--output_format all --define smt-on --define drop_caches --iterations 2 --define base_only --define
DL-VERS=7.0_T03 --output_format html,pdf,txt --tune base --nopower --runmode speed --tune base --size
refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2026-0.902.0-ic2025p3

```

```

6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) 6776P-B
vendor_id      : GenuineIntel
cpu family     : 6
model          : 174
stepping       : 1
microcode      : 0x1000303
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 72
siblings       : 144
1 physical ids (chips)
144 processors (hardware threads)
physical id 0: core ids 0-35,64-99
physical id 0: apicids 0-71,128-199

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 144
On-line CPU(s) list:   0-143
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel
Model name:             INTEL(R) XEON(R) 6776P-B
BIOS Model name:        INTEL(R) XEON(R) 6776P-B CPU @ 2.3GHz
BIOS CPU family:        179
CPU family:             6
Model:                  174
Thread(s) per core:    2

```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 7.74

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Mar-2026
Software Availability: Nov-2025

Platform Notes (Continued)

```

Core(s) per socket:          72
Socket(s):                   1
Stepping:                    1
BogoMIPS:                    4600.00
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                               pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                               pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                               nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                               pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                               xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                               tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                               3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                               ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                               vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                               rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                               intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                               xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                               split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                               arat pln pts vnni avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
                               vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
                               bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                               serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                               amx_int8 flush_lld arch_capabilities
Virtualization:              VT-x
L1d cache:                   3.4 MiB (72 instances)
L1i cache:                   4.5 MiB (72 instances)
L2 cache:                    144 MiB (72 instances)
L3 cache:                    288 MiB (1 instance)
NUMA node(s):                1
NUMA node0 CPU(s):           0-143
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:          Not affected
Vulnerability Mds:           Not affected
Vulnerability Meltdown:      Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:      Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:     Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:     Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                               PBRBSB-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:          Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 7.74

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Mar-2026
Software Availability: Nov-2025

Platform Notes (Continued)

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
Lld	48K	3.4M	12	Data	1	64	1	64
Lli	64K	4.5M	16	Instruction	1	64	1	64
L2	2M	144M	16	Unified	2	2048	1	64
L3	288M	288M	16	Unified	3	294912	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0-143
node 0 size: 514933 MB
node 0 free: 484763 MB
node distances:
node      0
0:      10

```

9. /proc/meminfo

MemTotal: 527292000 kB

10. who -r

run-level 3 Feb 6 16:56

11. Systemd service manager version: systemd 257 (257-9.el10_0.1-g8cd5633)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd audit-rules auditd avahi-daemon bluetooth chronyd crond cups
dbus-broker fips-crypto-policy-overlay firewalld gdm getty@ insights-client-boot
irqbalance iscsi-onboot iscsi-starter kdump libstoragemgmt lvm2-monitor mcelog mdmonitor
multipathd nvmeofc-boot-connections qemu-guest-agent rhsmcertd rsyslog rtkit-daemon
selinux-autorelabel-mark smartd sshd sssd switcheroo-control systemd-confext
systemd-network-generator systemd-pstore systemd-sysext tuned tuned-ppd udisks2 upower
vgauthd vmtoolsd
enabled-runtime systemd-remount-fs
disabled      arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait chronyd-restricted console-getty cups-browsed
dbus-daemon debug-shell dnf-system-upgrade dnsmasq gnome-remote-desktop
gnome-remote-desktop-configuration hypervfcopyd iscsi-init iscsid iscsiuiio kpatch kvm_stat
ledmon low-memory-monitor lvm-devices-import man-db-restart-cache-update microcode

```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 7.74

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Mar-2026
Software Availability: Nov-2025

Platform Notes (Continued)

```

netavark-dhcp-proxy netavark-firewalld-reload nftables nis-domainname nvmmf-autoconnect
podman podman-auto-update podman-clean-transient podman-kube@ podman-restart psacct
ras-mc-ctl rasdaemon rhsm rhsm-facts rpmdm-migrate rpmdm-rebuild
selinux-check-proper-disable serial-getty@ speech-dispatcherd ssh-host-keys-migration
sshd-keygen@ systemd-boot-check-no-failures systemd-boot-update
systemd-PCRlock-file-system systemd-PCRlock-firmware-code systemd-PCRlock-firmware-config
systemd-PCRlock-machine-id systemd-PCRlock-make-policy
systemd-PCRlock-secureboot-authority systemd-PCRlock-secureboot-policy
systemd-udev-load-credentials wpa_supplicant wsdd yggdrasil yggdrasil@
indirect iscsi pcsd spice-vdagentd sshd@ sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh
sssd-sudo systemd-sysupdate systemd-sysupdate-reboot systemd-userdbd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-6.12.0-55.9.1.el10_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=2G-64G:256M,64G-:512M
resume=UUID=94aa4dd4-b04d-42c5-9ac2-da9c96f84f4e
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

```

```

-----
14. cpupower frequency-info
analyzing CPU 104:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

```

```

-----
15. tuned-adm active
No current active profile.

```

```

-----
16. sysctl
kernel.numa_balancing 0
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500

```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 7.74

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Mar-2026

Software Availability: Nov-2025

Platform Notes (Continued)

```

vm.dirtytime_expire_seconds      43200
vm.extfrag_threshold             500
vm.min_unmapped_ratio           1
vm.nr_hugepages                  0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                    60
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 10.0 (Coughlan)
redhat-release Red Hat Enterprise Linux release 10.0 (Coughlan)
system-release Red Hat Enterprise Linux release 10.0 (Coughlan)

```

```

-----
20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2026-0.902.0-ic2025p3
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs           tmpfs 110G   13G   98G  12% /mnt/ramdisk

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:      Dell Inc.
Product:     PowerEdge XR8720t
Product Family: PowerEdge
Serial:      P404206

```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 7.74

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Mar-2026
Software Availability: Nov-2025

Platform Notes (Continued)

22. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x 00CE063200CE M321R8GA0PB2-CCPKC 64 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.
BIOS Version: 1.1.3
BIOS Date: 02/03/2026
BIOS Revision: 1.1

Compiler Version Notes

C | 811.tealeaf_s(base) 816.nab_s(base) 881.neutron_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

C++ | 803.sph_exa_s(base) 857.namd_s(base) 867.nest_s(base)
| 872.marian_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

C++, C | 809.cactus_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 7.74

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Mar-2026
Software Availability: Nov-2025

Compiler Version Notes (Continued)

```
=====
Fortran | 800.pot3d_s(base) 820.cloverleaf_s(base) 822.palm_s(base)
        | 849.fotonik3d_s(base) 865.roms_s(base)
=====
```

```
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
=====
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both C and C++:
icpx icx

Base Portability Flags

```
800.pot3d_s: -DSPEC_LP64
803.sph_exa_s: -DSPEC_LP64
809.cactus_s: -DSPEC_LP64
811.tealeaf_s: -DSPEC_LP64
816.nab_s: -DSPEC_LP64
820.cloverleaf_s: -DSPEC_LP64
822.palm_s: -DSPEC_LP64
849.fotonik3d_s: -DSPEC_LP64
857.namd_s: -DSPEC_LP64
865.roms_s: -DSPEC_LP64
867.nest_s: -DSPEC_LP64
872.marian_s: -DSPEC_LP64
881.neutron_s: -DSPEC_LP64
```



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 7.74

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Mar-2026
Software Availability: Nov-2025

Base Optimization Flags

C benchmarks:

```
-m64 -std=c18 -Wl,-z,muldefs -xgraniterapids  
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

C++ benchmarks:

```
803.sph_exa_s: -m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids  
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib  
-ljemalloc
```

857.namd_s: Same as 803.sph_exa_s

867.nest_s: Same as 803.sph_exa_s

```
872.marian_s: -m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids  
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-pthread -L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -stand f18 -Wl,-z,muldefs -xgraniterapids  
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -DSPEC_OPENMP -fiopenmp  
-nonstandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xgraniterapids  
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.html>
<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.xml>
<http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.xml>



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2026_fp_base = 7.74

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Mar-2026

Software Availability: Nov-2025

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-06 19:50:37-0500.

Report generated on 2026-05-04 23:29:28 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.