



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12  
(2.00 GHz, Intel Xeon 6787P)

SPECspeed®2026\_fp\_base = 7.97

SPECspeed®2026\_fp\_peak = 7.97

CPU2026 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

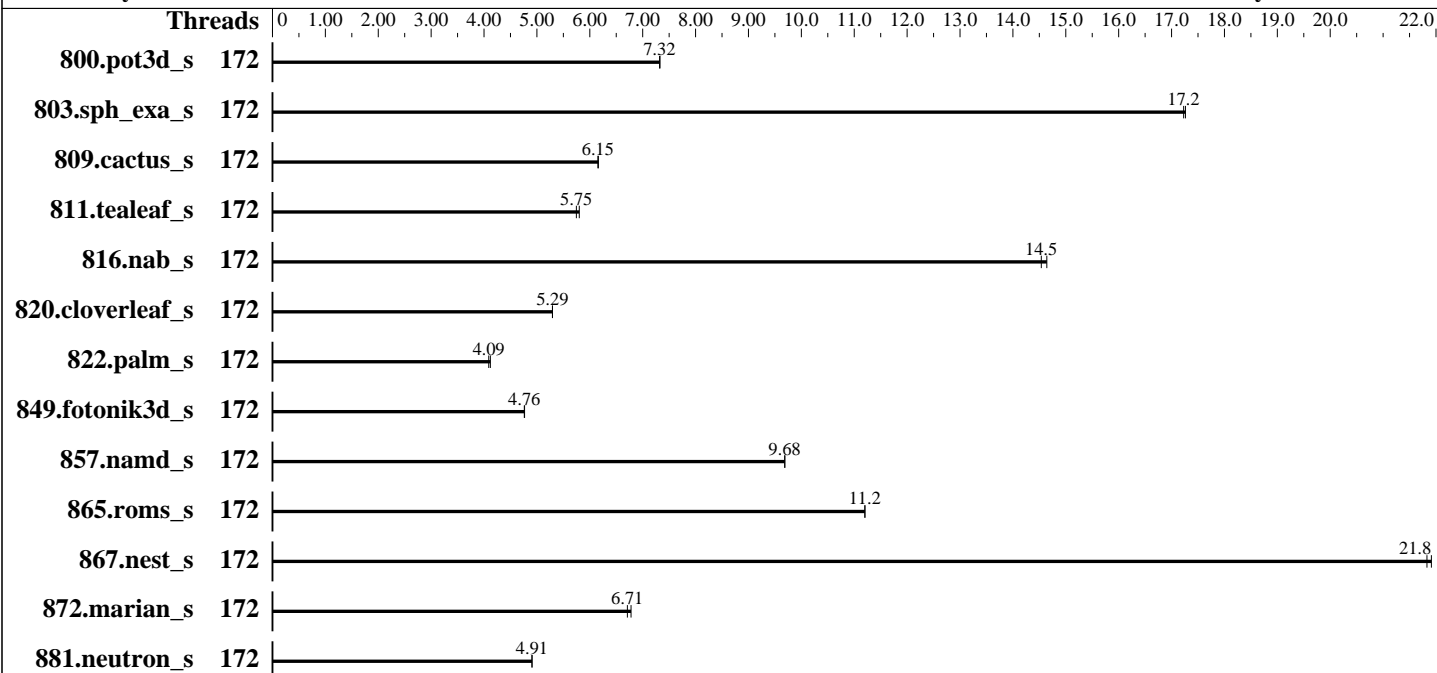

### Hardware

CPU Name: Intel Xeon 6787P  
 Max MHz: 3800  
 Nominal: 2000  
 Enabled: 86 cores, 1 chip, 2 threads/core  
 Orderable: 1 Chip  
 Cache L1: 64 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 336 MB I+D on chip per chip  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx8 PC5-6400B-R)  
 Storage: 1 x 1.6 TB NVMe SSD  
 Cooling: CLC  
 Other: None

### Software

OS: Ubuntu 24.04.3 LTS  
 Kernel 6.8.0-90-generic  
 Compiler: C/C++: Version 2025.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2025.3 of Intel Fortran Compiler for Linux  
 Compiler Category: Vendor  
 Firmware: HPE BIOS Version v1.60 released Jan-2026  
 File System: ext4  
 System State: Run level 5 (multi-user, graphical)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator v5.3  
 Power Management: BIOS is set to prefer performance at the cost of additional power usage



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12

(2.00 GHz, Intel Xeon 6787P)

SPECSpeed®2026\_fp\_base = 7.97

SPECSpeed®2026\_fp\_peak = 7.97

CPU2026 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Jan-2026

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
800.pot3d_s	172	<b>92.0</b>	<b>7.32</b>	91.8	7.33			172	<b>92.0</b>	<b>7.32</b>	91.8	7.33		
803.sph_exa_s	172	71.7	17.3	<b>71.9</b>	<b>17.2</b>			172	71.7	17.3	<b>71.9</b>	<b>17.2</b>		
809.cactus_s	172	182	6.16	<b>182</b>	<b>6.15</b>			172	182	6.16	<b>182</b>	<b>6.15</b>		
811.tealeaf_s	172	<b>96.9</b>	<b>5.75</b>	96.0	5.80			172	<b>96.9</b>	<b>5.75</b>	96.0	5.80		
816.nab_s	172	<b>77.5</b>	<b>14.5</b>	76.9	14.6			172	<b>77.5</b>	<b>14.5</b>	76.9	14.6		
820.cloverleaf_s	172	162	5.29	<b>162</b>	<b>5.29</b>			172	162	5.29	<b>162</b>	<b>5.29</b>		
822.palm_s	172	298	4.12	<b>300</b>	<b>4.09</b>			172	298	4.12	<b>300</b>	<b>4.09</b>		
849.fotonik3d_s	172	<b>139</b>	<b>4.76</b>	138	4.77			172	<b>139</b>	<b>4.76</b>	138	4.77		
857.namd_s	172	<b>150</b>	<b>9.68</b>	150	9.69			172	<b>150</b>	<b>9.68</b>	150	9.69		
865.roms_s	172	97.3	11.2	<b>97.3</b>	<b>11.2</b>			172	97.3	11.2	<b>97.3</b>	<b>11.2</b>		
867.nest_s	172	<b>99.0</b>	<b>21.8</b>	98.6	21.9			172	<b>99.0</b>	<b>21.8</b>	98.6	21.9		
872.marian_s	172	<b>161</b>	<b>6.71</b>	160	6.78			172	<b>161</b>	<b>6.71</b>	160	6.78		
881.neutron_s	172	166	4.91	<b>166</b>	<b>4.91</b>			172	166	4.91	<b>166</b>	<b>4.91</b>		

SPECSpeed®2026\_fp\_base = 7.97

SPECSpeed®2026\_fp\_peak = 7.97

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**  
(2.00 GHz, Intel Xeon 6787P)

**SPECspeed®2026\_fp\_base = 7.97**

**SPECspeed®2026\_fp\_peak = 7.97**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Peak Frequency Compute

Enhanced Processor Performance Profile set to Aggressive

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

Last Level Cache (LLC) Prefetch set to Enabled

Sub-NUMA Clustering (SNC) set to Enabled

Minimum Processor Idle Power Core C-State set to ACPI C3 state

Workload Profile set to Custom

Minimum Processor Idle Power Package C-State set to No Package State

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: 069f95da7e7f5d81b2ce48a82150e54f

running on admin1 Tue Feb 3 17:24:34 2026

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**  
(2.00 GHz, Intel Xeon 6787P)

**SPECspeed®2026\_fp\_base = 7.97**

**SPECspeed®2026\_fp\_peak = 7.97**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

- 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -srvm
Linux 6.8.0-90-generic #91-Ubuntu SMP PREEMPT_DYNAMIC Tue Nov 18 14:14:30 UTC 2025 x86_64
```

```
2. w
17:24:34 up 1 day, 7:23, 3 users, load average: 69.18, 43.87, 35.04
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
admin1    -        172.16.0.100  07:08      13:59m     0.00s    0.01s    sshd: admin1 [priv]
admin1    -        172.16.0.100  Mon10     13:59m     0.00s    0.33s    sshd: admin1 [priv]
admin1    tty1    -             Mon10     30:42m     0.06s    0.01s    -bash
```

```
3. Username
From environment variable $USER:  root
From the command 'logname':      admin1
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 32954836
process            1029519
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
```

```
5. sysinfo process ancestry
/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: admin1 [priv]
sshd: admin1@pts/0
-bash
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.00 GHz, Intel Xeon 6787P)

**SPECspeed®2026\_fp\_base = 7.97**

**SPECspeed®2026\_fp\_peak = 7.97**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

```

sudo -i
sudo -i
-bash
-bash
runccpu --nobuild --reportable --action validate --define default-platform-flags -c
  ic2025.3-sapphirerapids-cpu2026-0.902-speed-20260121.cfg --threads 172 --define cores=86 --tune base,peak
  -o all --define smt-on --define drop_caches fpspeed
runccpu --nobuild --reportable --action validate --define default-platform-flags --configfile
  ic2025.3-sapphirerapids-cpu2026-0.902-speed-20260121.cfg --threads 172 --define cores=86 --tune base,peak
  --output_format all --define smt-on --define drop_caches --nopower --runmode speed --tune base:peak --size
  refspeed fpspeed --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2026.025/templogs/preenv.fpspeed.025.0.log --lognum 025.0 --from_runccpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

### 6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) 6787P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 173
stepping        : 1
microcode       : 0x1000411
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi vmscape
cpu cores       : 86
siblings        : 172
1 physical ids (chips)
172 processors (hardware threads)
physical id 0:  core ids 0-42,64-106
physical id 0:  apicids 0-85,128-213

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 172
On-line CPU(s) list:   0-171
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             Intel(R) Xeon(R) 6787P
BIOS Model name:       Intel(R) Xeon(R) 6787P CPU @ 2.0GHz

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.00 GHz, Intel Xeon 6787P)

**SPECspeed®2026\_fp\_base = 7.97**

**SPECspeed®2026\_fp\_peak = 7.97**

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2026  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jan-2026

## Platform Notes (Continued)

BIOS CPU family: 179  
CPU family: 6  
Model: 173  
Thread(s) per core: 2  
Core(s) per socket: 86  
Socket(s): 1  
Stepping: 1  
CPU(s) scaling MHz: 25%  
CPU max MHz: 3800.0000  
CPU min MHz: 800.0000  
BogoMIPS: 4000.00

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat  
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx  
pdpelgb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good  
nopl xtopology nonstop\_tsc cpuid aperfperf tsc\_known\_freq pni  
pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16  
xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt  
tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm  
3dnowprefetch cpuid\_fault epb cat\_l3 cat\_l2 cdp\_l3 cdp\_l2 ssbd mba  
ibrs ibpb stibp ibrs\_enhanced tpr\_shadow flexpriority ept vpid ept\_ad  
fsgsbase tsc\_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt\_a  
avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel\_pt  
avx512cd sha\_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves  
cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local split\_lock\_detect  
user\_shstk avx\_vnni avx512\_bf16 wbnoinvd dtherm ida arat pln pts hwp  
hwp\_act\_window hwp\_epp hwp\_pkg\_req vnmi avx512vbmi umip pku ospke  
waitpkg avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg  
tme avx512\_vpopcntdq la57 rdpid bus\_lock\_detect cldemote movdiri  
movdir64b enqcmd fsrm md\_clear serialize tsxldtrk pconfig arch\_lbr  
ibt amx\_bf16 avx512\_fp16 amx\_tile amx\_int8 flush\_l1d  
arch\_capabilities ibpb\_exit\_to\_user

Virtualization: VT-x  
L1d cache: 4 MiB (86 instances)  
L1i cache: 5.4 MiB (86 instances)  
L2 cache: 172 MiB (86 instances)  
L3 cache: 336 MiB (1 instance)  
NUMA node(s): 1  
NUMA node0 CPU(s): 0-171  
Vulnerability Gather data sampling: Not affected  
Vulnerability Itlb multihit: Not affected  
Vulnerability L1tf: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Reg file data sampling: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec rstack overflow: Not affected

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.00 GHz, Intel Xeon 6787P)

**SPECspeed®2026\_fp\_base = 7.97**

**SPECspeed®2026\_fp\_peak = 7.97**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
 Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;  
 PBR SB-eIBRS Not affected; BHI BHI\_DIS\_S  
 Vulnerability Srbds: Not affected  
 Vulnerability Tsx async abort: Not affected  
 Vulnerability Vmscape: Mitigation; IBPB before exit to userspace

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4M	12	Data	1	64	1	64
L1i	64K	5.4M	16	Instruction	1	64	1	64
L2	2M	172M	16	Unified	2	2048	1	64
L3	336M	336M	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)  
 node 0 cpus: 0-171  
 node 0 size: 257459 MB  
 node 0 free: 98139 MB  
 node distances:  
 node 0  
 0: 10

9. /proc/meminfo

MemTotal: 263638704 kB

10. who -r

run-level 5 Feb 2 10:01

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)

Default Target	Status
graphical	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**  
(2.00 GHz, Intel Xeon 6787P)

**SPECspeed®2026\_fp\_base = 7.97**

**SPECspeed®2026\_fp\_peak = 7.97**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

```

systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2
  ufw unattended-upgrades vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
  systemd-boot-check-no-failures systemd-confext systemd-network-generator
systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
  systemd-time-wait-sync upower
indirect systemd-sysupdate systemd-sysupdate-reboot uidd
masked cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

```

### 13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.8.0-90-generic
root=UUID=c40cad6c-8173-41fe-9211-3e9f6d2619e9
ro

```

### 14. cpupower frequency-info

```

analyzing CPU 117:
  current policy: frequency should be within 800 MHz and 3.80 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.

boost state support:
  Supported: yes
  Active: yes

```

### 15. tuned-adm active

```

It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: balanced

```

### 16. sysctl

```

kernel.numa_balancing          0
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**  
(2.00 GHz, Intel Xeon 6787P)

**SPECspeed®2026\_fp\_base = 7.97**

**SPECspeed®2026\_fp\_peak = 7.97**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

```

vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages    0
vm.swappiness                   60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         always [madvise] never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS

```

```

-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme1n1p2 ext4  1.5T  172G  1.2T  13% /

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:          HPE
Product:         HPE ProLiant Compute DL320 Gen12
Product Family: ProLiant
Serial:          FLLKN48DYT

```

```

-----
22. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**  
(2.00 GHz, Intel Xeon 6787P)

**SPECspeed®2026\_fp\_base = 7.97**

**SPECspeed®2026\_fp\_peak = 7.97**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Hynix HMC88AHBRA471N 32 GB 2 rank 6400

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE  
BIOS Version: 1.60  
BIOS Date: 01/09/2026  
BIOS Revision: 1.60  
Firmware Revision: 1.18

## Compiler Version Notes

=====  
C | 811.tealeaf\_s(base, peak) 816.nab\_s(base, peak) 881.neutron\_s(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

=====  
C++ | 803.sph\_exa\_s(base, peak) 857.namd\_s(base, peak) 867.nest\_s(base, peak) 872.marian\_s(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

=====  
C++, C | 809.cactus\_s(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

=====  
Fortran | 800.pot3d\_s(base, peak) 820.cloverleaf\_s(base, peak) 822.palm\_s(base, peak) 849.fotonik3d\_s(base, peak) 865.roms\_s(base, peak)

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.00 GHz, Intel Xeon 6787P)

SPECspeed®2026\_fp\_base = 7.97

SPECspeed®2026\_fp\_peak = 7.97

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Compiler Version Notes (Continued)

| peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both C and C++:

icpx icx

## Base Portability Flags

800.pot3d\_s: -DSPEC\_LP64  
803.sph\_exa\_s: -DSPEC\_LP64  
809.cactus\_s: -DSPEC\_LP64  
811.tealeaf\_s: -DSPEC\_LP64  
816.nab\_s: -DSPEC\_LP64  
820.cloverleaf\_s: -DSPEC\_LP64  
822.palm\_s: -DSPEC\_LP64  
849.fotonik3d\_s: -DSPEC\_LP64  
857.namd\_s: -DSPEC\_LP64  
865.roms\_s: -DSPEC\_LP64  
867.nest\_s: -DSPEC\_LP64  
872.marian\_s: -DSPEC\_LP64  
881.neutron\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-z,muldefs -xsaphirerapids

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.00 GHz, Intel Xeon 6787P)

**SPECspeed®2026\_fp\_base = 7.97**

**SPECspeed®2026\_fp\_peak = 7.97**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

C++ benchmarks:

```
803.sph_exa_s: -m64 -std=c++17 -Wl,-z,muldefs -xsapphirerapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib
-ljemalloc
```

857.namd\_s: Same as 803.sph\_exa\_s

867.nest\_s: Same as 803.sph\_exa\_s

```
872.marian_s: -m64 -std=c++17 -Wl,-z,muldefs -xsapphirerapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-pthread -L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -stand f18 -Wl,-z,muldefs -xsapphirerapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -DSPEC_OPENMP -fiopenmp
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xsapphirerapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.00 GHz, Intel Xeon 6787P)

SPECspeed®2026\_fp\_base = 7.97

SPECspeed®2026\_fp\_peak = 7.97

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both C and C++:

icpx icx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

811.tealeaf\_s: basepeak = yes

816.nab\_s: basepeak = yes

881.neutron\_s: basepeak = yes

C++ benchmarks:

803.sph\_exa\_s: basepeak = yes

857.namd\_s: basepeak = yes

867.nest\_s: basepeak = yes

872.marian\_s: basepeak = yes

Fortran benchmarks:

800.pot3d\_s: basepeak = yes

820.cloverleaf\_s: basepeak = yes

822.palm\_s: basepeak = yes

849.fotonik3d\_s: basepeak = yes

865.roms\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.00 GHz, Intel Xeon 6787P)

**SPECspeed®2026\_fp\_base = 7.97**

**SPECspeed®2026\_fp\_peak = 7.97**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

809.cactus\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-Intel-GNR-rev1.4.html>

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-Intel-GNR-rev1.4.xml>

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-03 12:24:33-0500.

Report generated on 2026-05-04 23:32:19 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.