



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12  
(2.00 GHz, Intel Xeon 6787P)

SPECrate®2026\_int\_base = 328

SPECrate®2026\_int\_peak = 328

CPU2026 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

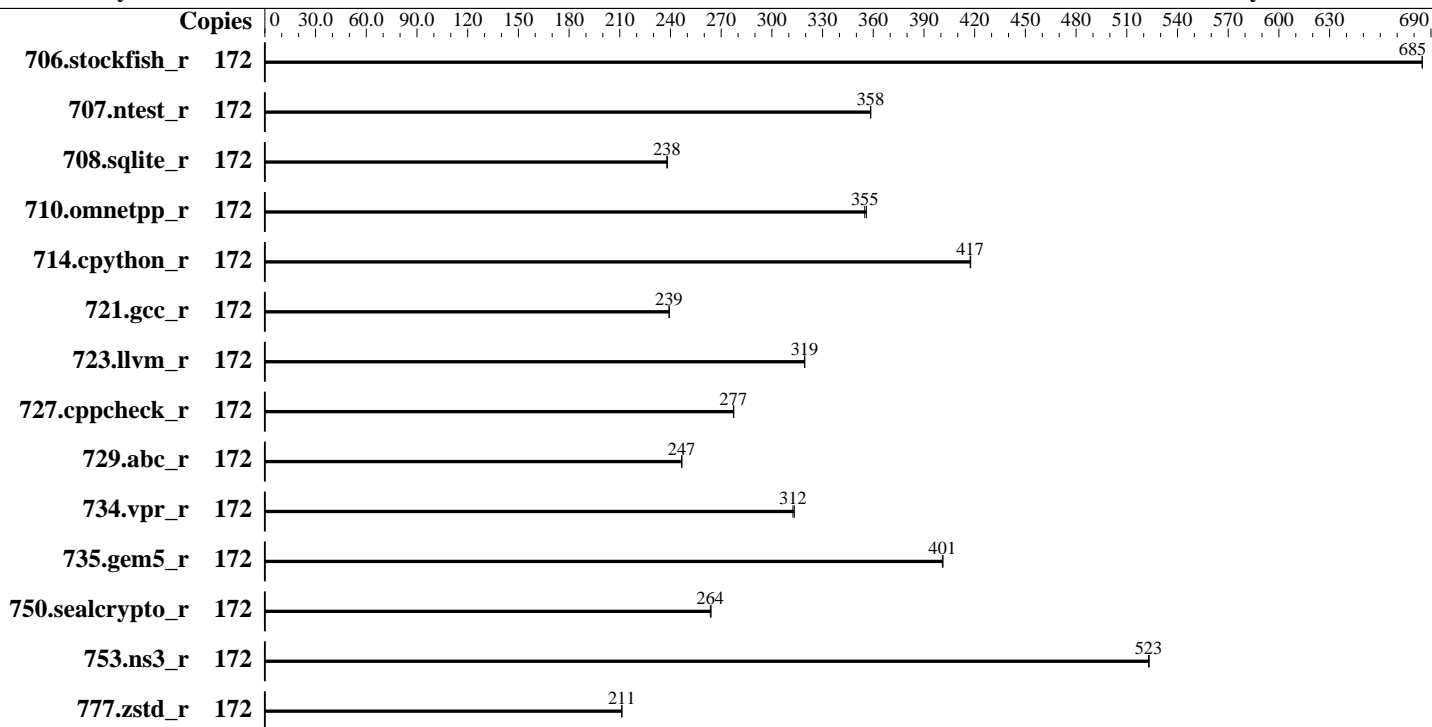

### Hardware

CPU Name: Intel Xeon 6787P  
 Max MHz: 3800  
 Nominal: 2000  
 Enabled: 86 cores, 1 chip, 2 threads/core  
 Orderable: 1 Chip  
 Cache L1: 64 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 336 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (8 x 64 GB 2Rx4 PC5-6400B-R)  
 Storage: 1 x 1.6 TB NVMe SSD  
 Cooling: CLC  
 Other: None

### Software

OS: Ubuntu 24.04.3 LTS  
 Kernel 6.8.0-90-generic  
 Compiler: C/C++: Version 2025.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2025.3 of Intel Fortran Compiler for Linux  
 Compiler Category: Vendor  
 Firmware: HPE BIOS Version v1.60 released Jan-2026  
 File System: ext4  
 System State: Run level 5 (multi-user, graphical)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS is set to prefer performance at the cost of additional power usage



SPEC

# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12

(2.00 GHz, Intel Xeon 6787P)

SPECrate®2026\_int\_base = 328

SPECrate®2026\_int\_peak = 328

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
706.stockfish_r	172	316	685	<b><u>316</u></b>	<b><u>685</u></b>			172	316	685	<b><u>316</u></b>	<b><u>685</u></b>		
707.ntest_r	172	284	359	<b><u>284</u></b>	<b><u>358</u></b>			172	284	359	<b><u>284</u></b>	<b><u>358</u></b>		
708.sqlite_r	172	<b><u>382</u></b>	<b><u>238</u></b>	381	238			172	<b><u>382</u></b>	<b><u>238</u></b>	381	238		
710.omnetpp_r	172	<b><u>235</u></b>	<b><u>355</u></b>	235	356			172	<b><u>235</u></b>	<b><u>355</u></b>	235	356		
714.cpython_r	172	197	418	<b><u>197</u></b>	<b><u>417</u></b>			172	197	418	<b><u>197</u></b>	<b><u>417</u></b>		
721.gcc_r	172	<b><u>493</u></b>	<b><u>239</u></b>	493	239			172	<b><u>493</u></b>	<b><u>239</u></b>	493	239		
723.llvm_r	172	273	320	<b><u>273</u></b>	<b><u>319</u></b>			172	273	320	<b><u>273</u></b>	<b><u>319</u></b>		
727.cppcheck_r	172	<b><u>223</u></b>	<b><u>277</u></b>	223	277			172	<b><u>223</u></b>	<b><u>277</u></b>	223	277		
729.abc_r	172	<b><u>320</u></b>	<b><u>247</u></b>	320	247			172	<b><u>320</u></b>	<b><u>247</u></b>	320	247		
734.vpr_r	172	253	313	<b><u>254</u></b>	<b><u>312</u></b>			172	253	313	<b><u>254</u></b>	<b><u>312</u></b>		
735.gem5_r	172	209	401	<b><u>209</u></b>	<b><u>401</u></b>			172	209	401	<b><u>209</u></b>	<b><u>401</u></b>		
750.sealcrypto_r	172	<b><u>350</u></b>	<b><u>264</u></b>	349	264			172	<b><u>350</u></b>	<b><u>264</u></b>	349	264		
753.ns3_r	172	201	523	<b><u>202</u></b>	<b><u>523</u></b>			172	201	523	<b><u>202</u></b>	<b><u>523</u></b>		
777.zstd_r	172	<b><u>524</u></b>	<b><u>211</u></b>	524	211			172	<b><u>524</u></b>	<b><u>211</u></b>	524	211		

SPECrate®2026\_int\_base = 328

SPECrate®2026\_int\_peak = 328

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2026/lib"  
MALLOC\_CONF = "retain:true"



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**  
(2.00 GHz, Intel Xeon 6787P)

**SPECrate®2026\_int\_base = 328**

**SPECrate®2026\_int\_peak = 328**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Throughput Compute

Enhanced Processor Performance Profile set to Aggressive

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

Last Level Cache (LLC) Prefetch set to Enabled

XPT Prefetch set to Disabled

Workload Profile set to Custom

DCU Stream Prefetcher set to Disabled

Adjacent Sector Prefetch set to Disabled

Sysinfo program /home/cpu2026/bin/sysinfo

Rev: 069f95da7e7f5d81b2ce48a82150e54f

running on admin1 Wed Feb 4 09:25:21 2026

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**  
(2.00 GHz, Intel Xeon 6787P)

**SPECrate®2026\_int\_base = 328**

**SPECrate®2026\_int\_peak = 328**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

- 16. sysctl
- 17. /sys/kernel/mm/transparent\_hugepage
- 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
-----
1. uname -srvm
Linux 6.8.0-90-generic #91-Ubuntu SMP PREEMPT_DYNAMIC Tue Nov 18 14:14:30 UTC 2025 x86_64
-----
```

```
-----
2. w
09:25:21 up 14 min, 2 users, load average: 0.02, 0.01, 0.00
USER      TTY      FROM          LOGIN@      IDLE        JCPU        PCPU        WHAT
admin1    tty1     172.16.0.100  09:15      14:20      0.00s      0.01s      sshd: admin1 [priv]
admin1    tty1     -              09:15      10:15      0.03s      0.01s      -bash
-----
```

```
-----
3. Username
From environment variable $USER:  root
From the command 'logname':      admin1
-----
```

```
-----
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 66009524
process            2062478
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
-----
```

```
-----
5. sysinfo process ancestry
/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: admin1 [priv]
sshd: admin1@pts/0
-----
```

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**  
(2.00 GHz, Intel Xeon 6787P)

**SPECrate®2026\_int\_base = 328**

**SPECrate®2026\_int\_peak = 328**

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2026  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jan-2026

## Platform Notes (Continued)

```

-bash
sudo -i
sudo -i
-bash
-bash
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 172 -c
ic2025.3-sapphirerapids-cpu2026-0.902-rate-20260121.cfg --define smt-on --define cores=86 --define
physicalfirst --define invoke_with_interleave --define drop_caches --tune base -o all intrate
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 172 --configfile
ic2025.3-sapphirerapids-cpu2026-0.902-rate-20260121.cfg --define smt-on --define cores=86 --define
physicalfirst --define invoke_with_interleave --define drop_caches --tune base --output_format all
--nopower--runmode rate --tune base --size refrate intrate--nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.007/templogs/preenv.intrate.007.0.log --lognum 007.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026

```

### 6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) 6787P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 173
stepping        : 1
microcode       : 0x1000411
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi vmscape
cpu cores       : 86
siblings        : 172
1 physical ids (chips)
172 processors (hardware threads)
physical id 0: core ids 0-42,64-106
physical id 0: apicids 0-85,128-213

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      46 bits physical, 57 bits virtual
Byte Order:         Little Endian
CPU(s):             172
On-line CPU(s) list: 0-171
Vendor ID:          GenuineIntel
BIOS Vendor ID:    Intel(R) Corporation
Model name:         Intel(R) Xeon(R) 6787P

```

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12  
(2.00 GHz, Intel Xeon 6787P)

SPECrate®2026\_int\_base = 328

SPECrate®2026\_int\_peak = 328

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2026  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jan-2026

### Platform Notes (Continued)

```

BIOS Model name: Intel(R) Xeon(R) 6787P CPU @ 2.0GHz
BIOS CPU family: 179
CPU family: 6
Model: 173
Thread(s) per core: 2
Core(s) per socket: 86
Socket(s): 1
Stepping: 1
CPU(s) scaling MHz: 25%
CPU max MHz: 3800.0000
CPU min MHz: 800.0000
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpelgb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx fl6c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 cdp_l2 ssbd mba
ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad
fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a
avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt
avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi umip pku ospke
waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri
movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr
ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_lld
arch_capabilities ibpb_exit_to_user

Virtualization: VT-x
L1d cache: 4 MiB (86 instances)
L1i cache: 5.4 MiB (86 instances)
L2 cache: 172 MiB (86 instances)
L3 cache: 336 MiB (1 instance)
NUMA node(s): 2
NUMA node0 CPU(s): 0-42,86-128
NUMA node1 CPU(s): 43-85,129-171
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected

```

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**  
(2.00 GHz, Intel Xeon 6787P)

**SPECrate®2026\_int\_base = 328**

**SPECrate®2026\_int\_peak = 328**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

Vulnerability Retbleed: Not affected  
 Vulnerability Spec rstack overflow: Not affected  
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
 Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization  
 Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI\_DIS\_S  
 Vulnerability Srbds: Not affected  
 Vulnerability Tsx async abort: Not affected  
 Vulnerability Vmscape: Mitigation; IBPB before exit to userspace

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4M	12	Data	1	64	1	64
L1i	64K	5.4M	16	Instruction	1	64	1	64
L2	2M	172M	16	Unified	2	2048	1	64
L3	336M	336M	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)  
 node 0 cpus: 0-42,86-128  
 node 0 size: 257732 MB  
 node 0 free: 256296 MB  
 node 1 cpus: 43-85,129-171  
 node 1 size: 257967 MB  
 node 1 free: 256882 MB  
 node distances:  
 node 0 1  
 0: 10 12  
 1: 12 10

9. /proc/meminfo

MemTotal: 528076192 kB

10. who -r

run-level 5 Feb 4 09:11

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)

Default Target	Status
graphical	running

12. Services, from systemctl list-unit-files

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.00 GHz, Intel Xeon 6787P)

**SPECrate®2026\_int\_base = 328**

**SPECrate®2026\_int\_peak = 328**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

STATE	UNIT FILES
enabled	ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell iscsid nftables rsync serial-getty@ ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext systemd-time-wait-sync upower
indirect	systemd-sysupdate systemd-sysupdate-reboot uidd
masked	cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

-----

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.8.0-90-generic
root=UUID=357b2269-28cb-4461-ad44-646338b204c8
ro
```

-----

14. cpupower frequency-info

```
analyzing CPU 24:
  current policy: frequency should be within 800 MHz and 3.80 GHz.
                  The governor "powersave" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
```

-----

15. tuned-adm active

```
Current active profile: balanced
```

-----

16. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
```

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.00 GHz, Intel Xeon 6787P)

**SPECrate®2026\_int\_base = 328**

**SPECrate®2026\_int\_peak = 328**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

```

vm.dirty_ratio                20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         always [madvice] never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS

```

```

-----
20. Disk information
SPEC is set to: /home/cpu2026
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p2 ext4  1.5T  137G  1.3T  10% /

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:          HPE
Product:         HPE ProLiant Compute DL320 Gen12
Product Family: ProLiant
Serial:          S84PQDRU0T

```

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.00 GHz, Intel Xeon 6787P)

**SPECrate®2026\_int\_base = 328**

**SPECrate®2026\_int\_peak = 328**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

### 22. dmidecode

Additional information from dmidecode 3.5 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

7x Hynix HMCG94AHBRA480N 64 GB 2 rank 6400

1x Hynix HMCG94AHBRA487N 64 GB 2 rank 6400

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE  
BIOS Version: 1.60  
BIOS Date: 01/09/2026  
BIOS Revision: 1.60  
Firmware Revision: 1.19

## Compiler Version Notes

=====  
C | 708.sqlite\_r(base) 714.cpython\_r(base) 777.zstd\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 706.stockfish\_r(base) 707.ntest\_r(base) 727.cppcheck\_r(base)  
| 753.ns3\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.  
=====

=====  
C++, C | 710.omnetpp\_r(base) 721.gcc\_r(base) 723.llvm\_r(base) 729.abc\_r(base)  
| 734.vpr\_r(base) 735.gem5\_r(base) 750.sealcrypto\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.00 GHz, Intel Xeon 6787P)

**SPECrate®2026\_int\_base = 328**

**SPECrate®2026\_int\_peak = 328**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Compiler Version Notes (Continued)

Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Benchmarks using both C and C++:

icpx icx

## Base Portability Flags

706.stockfish\_r: -DSPEC\_LP64  
707.ntest\_r: -DSPEC\_LP64  
708.sqlite\_r: -DSPEC\_LP64  
710.omnetpp\_r: -DSPEC\_LP64  
714.cpython\_r: -DSPEC\_LP64  
721.gcc\_r: -DSPEC\_LP64  
723.llvm\_r: -DSPEC\_LP64  
727.cppcheck\_r: -DSPEC\_LP64  
729.abc\_r: -DSPEC\_LP64  
734.vpr\_r: -DSPEC\_LP64  
735.gem5\_r: -DSPEC\_LP64  
750.sealcrypto\_r: -DSPEC\_LP64  
753.ns3\_r: -DSPEC\_LP64  
777.zstd\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-z,muldefs -xsaphirerapids  
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2025.3/lib -lqkmalloc

C++ benchmarks:

-m64 -std=c++17 -Wl,-z,muldefs -xsaphirerapids

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.00 GHz, Intel Xeon 6787P)

**SPECrate®2026\_int\_base = 328**

**SPECrate®2026\_int\_peak = 328**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2025.3/lib -lqkmalloc
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xsapphirerapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2025.3/lib -lqkmalloc
```

## Peak Optimization Flags

C benchmarks:

708.sqlite\_r: basepeak = yes

714.cpython\_r: basepeak = yes

777.zstd\_r: basepeak = yes

C++ benchmarks:

706.stockfish\_r: basepeak = yes

707.ntest\_r: basepeak = yes

727.cppcheck\_r: basepeak = yes

753.ns3\_r: basepeak = yes

Benchmarks using both C and C++:

710.omnetpp\_r: basepeak = yes

721.gcc\_r: basepeak = yes

723.llvm\_r: basepeak = yes

729.abc\_r: basepeak = yes

734.vpr\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.00 GHz, Intel Xeon 6787P)

**SPECrate®2026\_int\_base = 328**

**SPECrate®2026\_int\_peak = 328**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Peak Optimization Flags (Continued)

735.gem5\_r: basepeak = yes

750.sealcrypto\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-Intel-GNR-rev1.4.html>

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-Intel-GNR-rev1.4.xml>

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-04 04:25:20-0500.

Report generated on 2026-05-11 16:38:22 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.