



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12  
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026\_fp\_base = 448

SPECrate®2026\_fp\_peak = 448

CPU2026 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

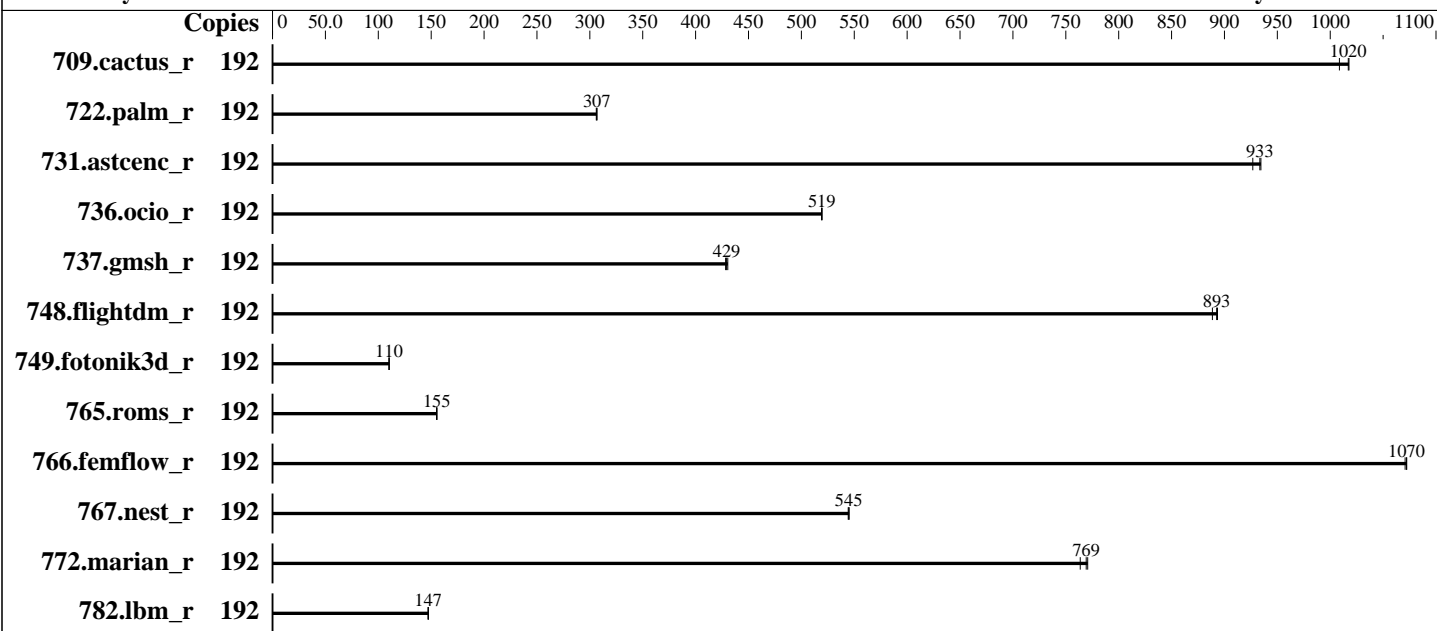

### Hardware

CPU Name: AMD EPYC 9965  
 Max MHz: 3700  
 Nominal: 2250  
 Enabled: 192 cores, 1 chip, 2 threads/core  
 Orderable: 1 Chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 384 MB I+D on chip per chip,  
 32 MB shared / 16 cores  
 Other: None  
 Memory: 1536 GB (12 x 128 GB 2Rx4 PC5-6400B-R,  
 running at 5200)  
 Storage: 1 x 1.6 TB NVMe SSD  
 Cooling: CLC  
 Other: None

### Software

OS: Ubuntu 24.04.3 LTS  
 Kernel 6.8.0-90-generic  
 Compiler: C/C++/Fortran: Version 5.1.0 of AOCC  
 Compiler Category: Vendor  
 Firmware: HPE BIOS Version v1.34  
 released Nov-2025  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS is set to prefer performance at the  
 cost of additional power usage



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12  
(2.25 GHz, AMD EPYC 9965)

SPECrate®2026\_fp\_base = 448

SPECrate®2026\_fp\_peak = 448

CPU2026 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Jan-2026  
Hardware Availability: Jul-2025  
Software Availability: Jan-2026

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	192	163	1010	162	1020	<b>162</b>	<b>1020</b>	192	163	1010	162	1020	<b>162</b>	<b>1020</b>
722.palm_r	192	<b>827</b>	<b>307</b>	826	307	828	306	192	<b>827</b>	<b>307</b>	826	307	828	306
731.ascenc_r	192	173	934	174	927	<b>173</b>	<b>933</b>	192	173	934	174	927	<b>173</b>	<b>933</b>
736.ocio_r	192	324	519	323	520	<b>323</b>	<b>519</b>	192	324	519	323	520	<b>323</b>	<b>519</b>
737.gmsh_r	192	206	428	205	430	<b>205</b>	<b>429</b>	192	206	428	205	430	<b>205</b>	<b>429</b>
748.flightdm_r	192	155	889	154	893	<b>154</b>	<b>893</b>	192	155	889	154	893	<b>154</b>	<b>893</b>
749.fotonik3d_r	192	2014	110	2014	110	<b>2014</b>	<b>110</b>	192	2014	110	2014	110	<b>2014</b>	<b>110</b>
765.roms_r	192	<b>1947</b>	<b>155</b>	1946	155	1950	155	192	<b>1947</b>	<b>155</b>	1946	155	1950	155
766.femflow_r	192	<b>263</b>	<b>1070</b>	263	1070	263	1070	192	<b>263</b>	<b>1070</b>	263	1070	263	1070
767.nest_r	192	279	545	<b>279</b>	<b>545</b>	280	544	192	279	545	<b>279</b>	<b>545</b>	280	544
772.marian_r	192	<b>394</b>	<b>769</b>	393	771	397	764	192	<b>394</b>	<b>769</b>	393	771	397	764
782.lbm_r	192	<b>747</b>	<b>147</b>	747	147	748	147	192	<b>747</b>	<b>147</b>	747	147	748	147

SPECrate®2026\_fp\_base = 448

SPECrate®2026\_fp\_peak = 448

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL325 Gen12**

(2.25 GHz, AMD EPYC 9965)

**SPECrate®2026\_fp\_base = 448**

**SPECrate®2026\_fp\_peak = 448**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2026

**Hardware Availability:** Jul-2025

**Software Availability:** Jan-2026

## Operating System Notes (Continued)

To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and

'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH =

"/home/cpu2026/amd\_rate\_aocc510\_znver5\_A\_lib/lib:/home/cpu2026/amd\_rate\_aocc510\_znver5\_A\_lib/lib32:"

MALLOC\_CONF = "retain:true"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB

Memory using Ubuntu 24.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to High Performance Compute (HPC)

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

ACPI CST C2 Latency set to 18 microseconds

NUMA memory domains per socket set to Four memory domains per socket

Thermal Configuration set to Maximum Cooling

AMD Periodic Directory Rinse set to Periodic

Workload Profile set to Custom

Power Regulator set to OS Control Mode

L2 HW Prefetcher set to Disabled

Sysinfo program /home/cpu2026/bin/sysinfo

Rev: 069f95da7e7f5d81b2ce48a82150e54f

running on admin1 Thu Jan 29 04:09:59 2026

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL325 Gen12**  
(2.25 GHz, AMD EPYC 9965)

**SPECrate®2026\_fp\_base = 448**

**SPECrate®2026\_fp\_peak = 448**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2026

**Hardware Availability:** Jul-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```

1. uname -srvm
Linux 6.8.0-90-generic #91-Ubuntu SMP PREEMPT_DYNAMIC Tue Nov 18 14:14:30 UTC 2025 x86_64

```

```

2. w
04:09:59 up 21 min,  6 users,  load average: 0.29, 0.07, 0.02
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
admin1    pts/0    172.16.0.111  04:09      21:46      0.00s     0.01s    sshd: admin1 [priv]
admin1    pts/0    172.16.0.111  04:09      21:46      0.00s     0.01s    sshd: admin1 [priv]
admin1    pts/0    172.16.0.111  04:09      21:46      0.00s     0.01s    sshd: admin1 [priv]
admin1    pts/0    172.16.0.111  04:09      21:46      0.00s     0.01s    sshd: admin1 [priv]
admin1    pts/0    172.16.0.100  04:07      21:46      0.00s     0.03s    sshd: admin1 [priv]
admin1    pts/0    172.16.0.100  03:48      21:46      0.00s     0.02s    sshd: admin1 [priv]

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL325 Gen12**

(2.25 GHz, AMD EPYC 9965)

**SPECrate®2026\_fp\_base = 448**

**SPECrate®2026\_fp\_peak = 448**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2026

**Hardware Availability:** Jul-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

### 3. Username

From environment variable \$USER: root  
From the command 'logname': adminl

### 4. ulimit -a

```
time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)      0
memory(kbytes)         unlimited
locked memory(kbytes) 2097152
process                6190293
nofiles                1024
vmemory(kbytes)       unlimited
locks                  unlimited
rtprio                 0
```

### 5. sysinfo process ancestry

```
/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: adminl [priv]
sshd: adminl@notty
/bin/bash $SPEC/run_fprate_sh.sh
sudo ./run_fprate.py
python3 ./run_fprate.py
/bin/bash ./amd_rate_aocc510_znver5_A1.sh
runcpu --config amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026
```

### 6. /proc/cpuinfo

```
model name      : AMD EPYC 9965 192-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 17
stepping       : 0
microcode      : 0xb101054
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 192 4K pages
cpu cores      : 192
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL325 Gen12**  
(2.25 GHz, AMD EPYC 9965)

**SPECrate®2026\_fp\_base = 448**

**SPECrate®2026\_fp\_peak = 448**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2026

**Hardware Availability:** Jul-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

```
siblings          : 384
1 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-191
physical id 0: apicids 0-383
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                384
On-line CPU(s) list:   0-383
Vendor ID:             AuthenticAMD
BIOS Vendor ID:        Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9965 192-Core Processor
BIOS Model name:       AMD EPYC 9965 192-Core Processor          CPU @ 2.2GHz
BIOS CPU family:       107
CPU family:            26
Model:                 17
Thread(s) per core:    2
Core(s) per socket:    192
Socket(s):              1
Stepping:              0
Frequency boost:       enabled
CPU(s) scaling MHz:    101%
CPU max MHz:           2250.0000
CPU min MHz:           1500.0000
BogoMIPS:              4493.33
```

```
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL325 Gen12**  
(2.25 GHz, AMD EPYC 9965)

**SPECrate®2026\_fp\_base = 448**

**SPECrate®2026\_fp\_peak = 448**

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2026  
**Hardware Availability:** Jul-2025  
**Software Availability:** Jan-2026

## Platform Notes (Continued)

xsaveerptr rdpru wbnoinvd amd\_ppin cpcp amd\_ibpb\_ret arat npt lbrv  
svm\_lock nrrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists  
pausefilter pfthreshold avic v\_vmsave\_vmload vgif x2avic v\_spec\_ctrl  
vnmi avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq  
avx512\_vnni avx512\_bitalg avx512\_vpopcntdq la57 rdpid bus\_lock\_detect  
movdiri movdir64b overflow\_recov succor smca fsrm avx512\_vp2intersect  
flush\_llid debug\_swap

Virtualization: AMD-V  
L1d cache: 9 MiB (192 instances)  
L1i cache: 6 MiB (192 instances)  
L2 cache: 192 MiB (192 instances)  
L3 cache: 384 MiB (12 instances)  
NUMA node(s): 4  
NUMA node0 CPU(s): 0-47,192-239  
NUMA node1 CPU(s): 48-95,240-287  
NUMA node2 CPU(s): 96-143,288-335  
NUMA node3 CPU(s): 144-191,336-383  
Vulnerability Gather data sampling: Not affected  
Vulnerability Itlb multihit: Not affected  
Vulnerability L1tf: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Reg file data sampling: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec rstack overflow: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP  
always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected  
Vulnerability Vmscape: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	9M	12	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	16	Unified	2	1024	1	64
L3	32M	384M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.  
available: 4 nodes (0-3)  
node 0 cpus: 0-47,192-239  
node 0 size: 386659 MB

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL325 Gen12**

(2.25 GHz, AMD EPYC 9965)

**SPECrate®2026\_fp\_base = 448**

**SPECrate®2026\_fp\_peak = 448**

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2026  
**Hardware Availability:** Jul-2025  
**Software Availability:** Jan-2026

## Platform Notes (Continued)

```

node 0 free: 385697 MB
node 1 cpus: 48-95,240-287
node 1 size: 387039 MB
node 1 free: 385794 MB
node 2 cpus: 96-143,288-335
node 2 size: 387039 MB
node 2 free: 386179 MB
node 3 cpus: 144-191,336-383
node 3 size: 386914 MB
node 3 free: 385901 MB
node distances:
node  0  1  2  3
  0:  10 12 12 12
  1:  12 10 12 12
  2:  12 12 10 12
  3:  12 12 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:      1584796980 kB

```

```

-----
10. who -r
    run-level 5 Jan 29 03:48

```

```

-----
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)
    Default Target  Status
    graphical      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init
               cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
               grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd
               networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
               snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore
               systemd-resolved thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw
               unattended-upgrades vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled        console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
               systemd-boot-check-no-failures systemd-confext systemd-network-generator
               systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
               systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
               systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
               systemd-time-wait-sync systemd-timesyncd upower

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL325 Gen12**

(2.25 GHz, AMD EPYC 9965)

**SPECrate®2026\_fp\_base = 448**

**SPECrate®2026\_fp\_peak = 448**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2026

**Hardware Availability:** Jul-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

```
indirect          systemd-sysupdate systemd-sysupdate-reboot uidd
masked           cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common
```

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.8.0-90-generic
root=UUID=23e3b8c8-72f7-4e93-a794-3e98f6ff544b
ro
```

-----  
14. cpupower frequency-info

```
analyzing CPU 325:
  current policy: frequency should be within 1.50 GHz and 2.25 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 2250MHz
```

-----  
15. tuned-adm active

```
Current active profile: balanced
```

-----  
16. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL325 Gen12**

(2.25 GHz, AMD EPYC 9965)

**SPECrate®2026\_fp\_base = 448**

**SPECrate®2026\_fp\_peak = 448**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2026

**Hardware Availability:** Jul-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

```

-----
17. /sys/kernel/mm/transparent_hugepage
   defrag           [always] defer defer+madvise madvise never
   enabled          [always] madvise never
   hpage_pmd_size   2097152
   shmem_enabled    always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs 60000
   defrag                 1
   max_ptes_none          511
   max_ptes_shared        256
   max_ptes_swap          64
   pages_to_scan          4096
   scan_sleep_millisecs  10000

```

```

-----
19. OS release
   From /etc/*-release /etc/*-version
   os-release Ubuntu 24.04.3 LTS

```

```

-----
20. Disk information
   SPEC is set to: /home/cpu2026
   Filesystem  Type  Size  Used Avail Use% Mounted on
   /dev/nvme0n1p2 ext4  1.5T  82G  1.3T   6% /

```

```

-----
21. /sys/devices/virtual/dmi/id
   Vendor:           HPE
   Product:          HPE ProLiant Compute DL325 Gen12
   Product Family:   ProLiant
   Serial:           SANJACSCM

```

```

-----
22. dmidecode
   Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     2x Samsung M321RAJA0MB2-CCPEC 128 GB 2 rank 6400, configured at 5200
     10x Samsung M321RAJA0MB2-CCPKC 128 GB 2 rank 6400, configured at 5200

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL325 Gen12**

(2.25 GHz, AMD EPYC 9965)

**SPECrate®2026\_fp\_base = 448**

**SPECrate®2026\_fp\_peak = 448**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2026

**Hardware Availability:** Jul-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE  
BIOS Version: 1.34  
BIOS Date: 11/28/2025  
BIOS Revision: 1.34  
Firmware Revision: 1.18

## Compiler Version Notes

=====  
C | 782.lbm\_r(base)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin  
=====

=====  
C++ | 731.astcenc\_r(base) 736.ocio\_r(base) 748.flightdm\_r(base)  
| 766.femflow\_r(base) 767.nest\_r(base) 772.marian\_r(base)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin  
=====

=====  
C++, C | 709.cactus\_r(base) 737.gmsh\_r(base)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin  
=====

=====  
Fortran | 722.palm\_r(base) 749.fotonik3d\_r(base) 765.roms\_r(base)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin  
=====

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL325 Gen12**

(2.25 GHz, AMD EPYC 9965)

**SPECrate®2026\_fp\_base = 448**

**SPECrate®2026\_fp\_peak = 448**

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2026  
**Hardware Availability:** Jul-2025  
**Software Availability:** Jan-2026

## Compiler Version Notes (Continued)

-----

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both C and C++:

clang++ clang

## Base Portability Flags

709.cactus\_r: -DSPEC\_LP64  
722.palm\_r: -DSPEC\_LP64  
731.ascenc\_r: -DSPEC\_LP64  
736.ocio\_r: -fno-finite-math-only -DSPEC\_LP64  
737.gmsh\_r: -fno-fast-math -DSPEC\_LP64  
748.flightdm\_r: -fno-reciprocal-math -DSPEC\_LP64  
749.fotonik3d\_r: -DSPEC\_LP64  
765.roms\_r: -DSPEC\_LP64  
766.femflow\_r: -DSPEC\_LP64  
767.nest\_r: -fno-finite-math-only -DSPEC\_LP64  
772.marian\_r: -DSPEC\_LP64  
782.lbm\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather  
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL325 Gen12**

(2.25 GHz, AMD EPYC 9965)

**SPECrate®2026\_fp\_base = 448**

**SPECrate®2026\_fp\_peak = 448**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2026

**Hardware Availability:** Jul-2025

**Software Availability:** Jan-2026

## Base Optimization Flags (Continued)

C benchmarks (continued):

-lflang

C++ benchmarks:

-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -flto  
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
-lflang

Fortran benchmarks:

-m64 -Mstandard -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -ffast-math -O3  
-march=znver5 -fveclib=AMDLIBM -flto -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc  
-lflang

Benchmarks using both C and C++:

-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang

## Peak Optimization Flags

C benchmarks:

782.lbm\_r: basepeak = yes

C++ benchmarks:

731.astcenc\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL325 Gen12**

(2.25 GHz, AMD EPYC 9965)

**SPECrate®2026\_fp\_base = 448**

**SPECrate®2026\_fp\_peak = 448**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2026

**Hardware Availability:** Jul-2025

**Software Availability:** Jan-2026

## Peak Optimization Flags (Continued)

736.ocio\_r: basepeak = yes

748.flightdm\_r: basepeak = yes

766.femflow\_r: basepeak = yes

767.nest\_r: basepeak = yes

772.marian\_r: basepeak = yes

Fortran benchmarks:

722.palm\_r: basepeak = yes

749.fotonik3d\_r: basepeak = yes

765.roms\_r: basepeak = yes

Benchmarks using both C and C++:

709.cactus\_r: basepeak = yes

737.gmsh\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.html>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.xml>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2026 v0.902.0 on 2026-01-28 23:09:58-0500.

Report generated on 2026-05-11 16:38:34 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.