



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2026_int_base = 1230

SPECrate®2026_int_peak = 1230

CPU2026 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

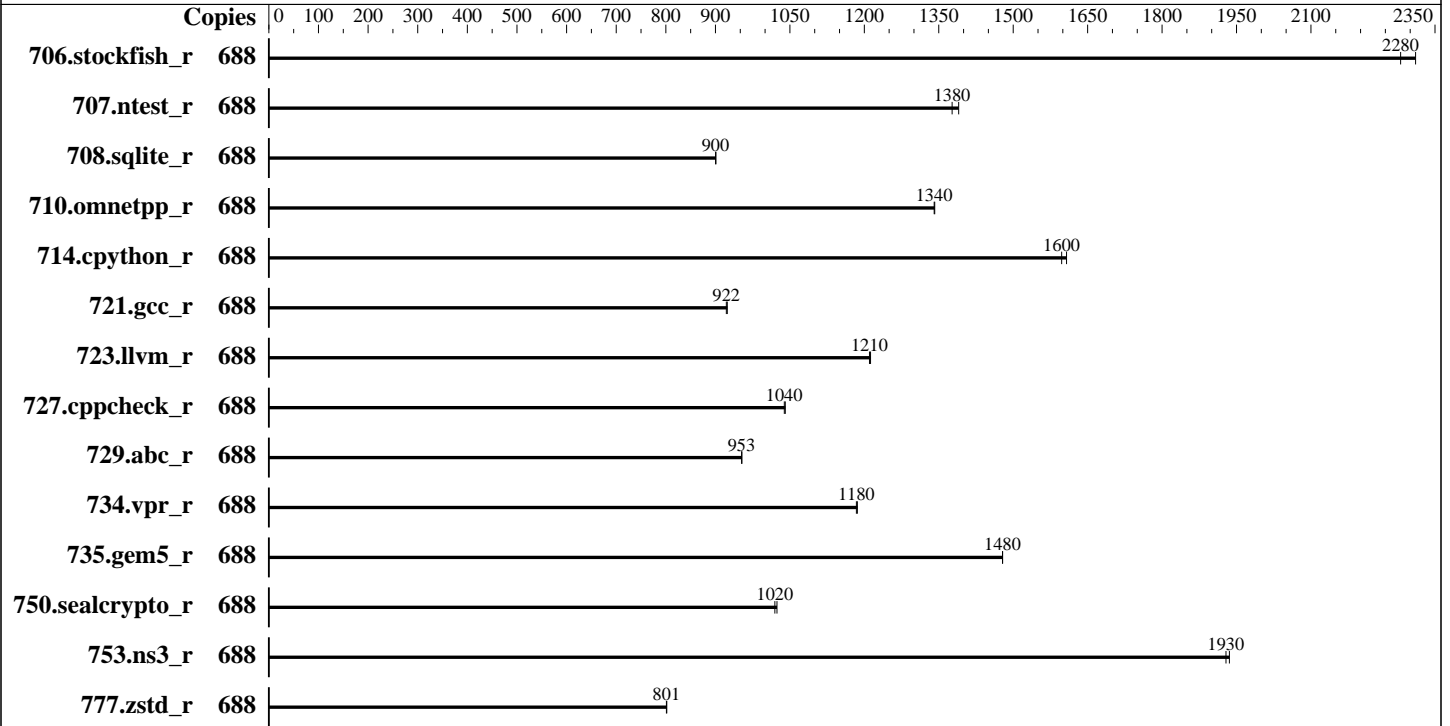

Hardware

CPU Name: Intel Xeon 6788P
 Max MHz: 3800
 Nominal: 2000
 Enabled: 344 cores, 4 chips, 2 threads/core
 Orderable: 1,2,4 Chips
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 336 MB I+D on chip per chip
 Other: None
 Memory: 2 TB (32 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 1 x 1.6 TB NVMe SSD
 Cooling: Air
 Other: None

Software

OS: Ubuntu 24.04.3 LTS
 Kernel 6.8.0-90-generic
 Compiler: C/C++: Version 2025.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2025.3 of Intel Fortran Compiler for Linux
 Compiler Category: Vendor
 Firmware: HPE BIOS Version v1.60 released Jan-2026
 File System: ext4
 System State: Run level 5 (multi-user, graphical)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS is set to prefer performance at the cost of additional power usage



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2026_int_base = 1230

SPECrate®2026_int_peak = 1230

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
706.stockfish_r	688	375	2310	380	2280			688	375	2310	380	2280		
707.ntest_r	688	296	1380	293	1390			688	296	1380	293	1390		
708.sqlite_r	688	404	900	403	901			688	404	900	403	901		
710.omnetpp_r	688	249	1340	249	1340			688	249	1340	249	1340		
714.cpython_r	688	206	1600	205	1610			688	206	1600	205	1610		
721.gcc_r	688	512	922	511	924			688	512	922	511	924		
723.llvm_r	688	288	1210	288	1210			688	288	1210	288	1210		
727.cppcheck_r	688	238	1040	237	1040			688	238	1040	237	1040		
729.abc_r	688	331	953	331	953			688	331	953	331	953		
734.vpr_r	688	267	1190	268	1180			688	267	1190	268	1180		
735.gem5_r	688	227	1480	227	1480			688	227	1480	227	1480		
750.sealcrypto_r	688	360	1020	362	1020			688	360	1020	362	1020		
753.ns3_r	688	218	1940	219	1930			688	218	1940	219	1930		
777.zstd_r	688	553	802	553	801			688	553	802	553	801		

SPECrate®2026_int_base = 1230

SPECrate®2026_int_peak = 1230

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2026/lib"
MALLOC_CONF = "retain:true"



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12
(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2026_int_base = 1230

SPECrate®2026_int_peak = 1230

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Throughput Compute

Enhanced Processor Performance Profile set to Aggressive

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

Last Level Cache (LLC) Prefetch set to Enabled

XPT Prefetch set to Disabled

Intel UPI Prefetch set to Disabled

Workload Profile set to Custom

DCU Stream Prefetcher set to Disabled

Adjacent Sector Prefetch set to Disabled

Sysinfo program /home/cpu2026/bin/sysinfo

Rev: 069f95da7e7f5d81b2ce48a82150e54f

running on admin1 Fri Feb 6 02:13:59 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12
(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2026_int_base = 1230

SPECrate®2026_int_peak = 1230

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Platform Notes (Continued)

- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
-----
1. uname -srvm
Linux 6.8.0-90-generic #91-Ubuntu SMP PREEMPT_DYNAMIC Tue Nov 18 14:14:30 UTC 2025 x86_64
-----
```

```
-----
2. w
02:13:59 up 9 min, 2 users, load average: 0.08, 0.12, 0.11
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
admin1    tty1    172.16.0.100  02:11      8:55      0.00s     0.02s     sshd: admin1 [priv]
admin1    tty1    -             02:10      3:28      0.03s     0.01s     -bash
-----
```

```
-----
3. Username
From environment variable $USER:  root
From the command 'logname':      admin1
-----
```

```
-----
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 264124516
process            8253571
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
-----
```

```
-----
5. sysinfo process ancestry
/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: admin1 [priv]
-----
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12
(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2026_int_base = 1230

SPECrate®2026_int_peak = 1230

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Platform Notes (Continued)

```

sshd: adminl@pts/0
-bash
sudo -i
sudo -i
-bash
-bash
-bash
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 688 -c
ic2025.3-core-avx512-cpu2026-0.902-rate-20260121.cfg --define smt-on --define cores=344 --define
physicalfirst --define invoke_with_interleave --define drop_caches --tune base -n 2 -o all intrate
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 688 --configfile
ic2025.3-core-avx512-cpu2026-0.902-rate-20260121.cfg --define smt-on --define cores=344 --define
physicalfirst --define invoke_with_interleave --define drop_caches --tune base --iterations 2
--output_format all --nopower --runmode rate --tune base --size refrate intrate --nopreenv --note-preenv
--logfile $SPEC/tmp/CPU2026.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) 6788P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x1000411
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi vmscape
cpu cores     : 86
siblings       : 172
4 physical ids (chips)
688 processors (hardware threads)
physical id 0: core ids 0-42,64-106
physical id 1: core ids 0-42,64-106
physical id 2: core ids 0-42,64-106
physical id 3: core ids 0-42,64-106
physical id 0: apicids 0-85,128-213
physical id 1: apicids 256-341,384-469
physical id 2: apicids 512-597,640-725
physical id 3: apicids 768-853,896-981

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```

From lscpu from util-linux 2.39.3:
Architecture:          x86_64

```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12
(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2026_int_base = 1230

SPECrate®2026_int_peak = 1230

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

Platform Notes (Continued)

```

CPU op-mode(s):          32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 688
On-line CPU(s) list:    0-687
Vendor ID:              GenuineIntel
BIOS Vendor ID:         Intel(R) Corporation
Model name:              Intel(R) Xeon(R) 6788P
BIOS Model name:        Intel(R) Xeon(R) 6788P  CPU @ 2.0GHz
BIOS CPU family:        179
CPU family:              6
Model:                   173
Thread(s) per core:     2
Core(s) per socket:     86
Socket(s):               4
Stepping:                1
CPU(s) scaling MHz:     22%
CPU max MHz:             3800.0000
CPU min MHz:             800.0000
BogoMIPS:                4000.00
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                        nopl xtopology nonstop_tsc cpuid aperfperf tsc_known_freq pni
                        pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                        xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                        tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                        3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 cdp_l2 ssbd mba
                        ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad
                        fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a
                        avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt
                        avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
                        cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                        user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
                        hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi umip pku ospke
                        waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri
                        movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr
                        ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_lld
                        arch_capabilities ibpb_exit_to_user
Virtualization:         VT-x
L1d cache:              16.1 MiB (344 instances)
L1i cache:              21.5 MiB (344 instances)
L2 cache:                688 MiB (344 instances)
L3 cache:                1.3 GiB (4 instances)
NUMA node(s):           8
NUMA node0 CPU(s):     0-42,344-386

```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12
(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2026_int_base = 1230

SPECrate®2026_int_peak = 1230

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

Platform Notes (Continued)

```

NUMA node1 CPU(s):          43-85,387-429
NUMA node2 CPU(s):          86-128,430-472
NUMA node3 CPU(s):          129-171,473-515
NUMA node4 CPU(s):          172-214,516-558
NUMA node5 CPU(s):          215-257,559-601
NUMA node6 CPU(s):          258-300,602-644
NUMA node7 CPU(s):          301-343,645-687
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:                Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:     Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:           Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:   Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:          Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:          Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                   PBR SB-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:              Not affected
Vulnerability Tsx async abort:     Not affected
Vulnerability Vmscape:            Mitigation; IBPB before exit to userspace

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	16.1M	12	Data	1	64	1	64
L1i	64K	21.5M	16	Instruction	1	64	1	64
L2	2M	688M	16	Unified	2	2048	1	64
L3	336M	1.3G	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-42,344-386
node 0 size: 257370 MB
node 0 free: 253548 MB
node 1 cpus: 43-85,387-429
node 1 size: 258018 MB
node 1 free: 257052 MB
node 2 cpus: 86-128,430-472
node 2 size: 258018 MB
node 2 free: 257046 MB
node 3 cpus: 129-171,473-515
node 3 size: 258018 MB
node 3 free: 257058 MB

```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12
(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2026_int_base = 1230

SPECrate®2026_int_peak = 1230

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

Platform Notes (Continued)

```

node 4 cpus: 172-214,516-558
node 4 size: 258018 MB
node 4 free: 257087 MB
node 5 cpus: 215-257,559-601
node 5 size: 258018 MB
node 5 free: 256795 MB
node 6 cpus: 258-300,602-644
node 6 size: 258018 MB
node 6 free: 257076 MB
node 7 cpus: 301-343,645-687
node 7 size: 257989 MB
node 7 free: 257019 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10 12 21 21 21 21 21 21
  1:  12 10 21 21 21 21 21 21
  2:  21 21 10 12 21 21 21 21
  3:  21 21 12 10 21 21 21 21
  4:  21 21 21 21 10 12 21 21
  5:  21 21 21 21 12 10 21 21
  6:  21 21 21 21 21 21 10 12
  7:  21 21 21 21 21 21 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:          2112996128 kB

```

```

-----
10. who -r
    run-level 5 Feb 6 02:05

```

```

-----
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)
    Default Target    Status
    graphical         running

```

```

-----
12. Services, from systemctl list-unit-files
    STATE                UNIT FILES
    enabled              ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init
                           cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                           grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd
                           networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
                           snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore
                           systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2
                           ufw unattended-upgrades vgauth
    enabled-runtime     netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs

```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12
(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2026_int_base = 1230

SPECrate®2026_int_peak = 1230

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Platform Notes (Continued)

```

disabled      console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
               systemd-boot-check-no-failures systemd-confext systemd-network-generator
               systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
               systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
               systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
               systemd-time-wait-sync upower
indirect      systemd-sysupdate systemd-sysupdate-reboot uidd
masked        cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.8.0-90-generic
root=UUID=1167c2a9-3418-41e4-8aa6-434d83833b85
ro

```

14. cpupower frequency-info

```

analyzing CPU 313:
  current policy: frequency should be within 800 MHz and 3.80 GHz.
                  The governor "powersave" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes

```

15. tuned-adm active

```

It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: balanced

```

16. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0

```

(Continued on next page)



SPEC

SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2026_int_base = 1230

SPECrate®2026_int_peak = 1230

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

Platform Notes (Continued)

```

vm.swappiness                60
vm.watermark_boost_factor    15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode         0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         always [madvice] never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS

```

```

-----
20. Disk information
SPEC is set to: /home/cpu2026
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p2  ext4  1.5T   30G  1.4T   3% /

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:          HPE
Product:         HPE ProLiant Compute DL580 Gen12
Product Family: ProLiant
Serial:          7CED2FP013

```

```

-----
22. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:

```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2026_int_base = 1230

SPECrate®2026_int_peak = 1230

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Platform Notes (Continued)

31x Hynix HMC94AHBRA480N 64 GB 2 rank 6400

1x Hynix HMC94AHBRA487N 64 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.60
BIOS Date: 01/09/2026
BIOS Revision: 1.60
Firmware Revision: 1.19

Compiler Version Notes

=====
C | 708.sqlite_r(base) 714.cpython_r(base) 777.zstd_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
=====

=====
C++ | 706.stockfish_r(base) 707.ntest_r(base) 727.cppcheck_r(base)
| 753.ns3_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
=====

=====
C++, C | 710.omnetpp_r(base) 721.gcc_r(base) 723.llvm_r(base) 729.abc_r(base)
| 734.vpr_r(base) 735.gem5_r(base) 750.sealcrypto_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2025.3.0 Build 20251010
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:
icx

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12
(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2026_int_base = 1230

SPECrate®2026_int_peak = 1230

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Benchmarks using both C and C++:

icpx icx

Base Portability Flags

```
706.stockfish_r: -DSPEC_LP64
707.ntest_r: -DSPEC_LP64
708.sqlite_r: -DSPEC_LP64
710.omnetpp_r: -DSPEC_LP64
714.cpython_r: -DSPEC_LP64
721.gcc_r: -DSPEC_LP64
723.llvm_r: -DSPEC_LP64
727.cppcheck_r: -DSPEC_LP64
729.abc_r: -DSPEC_LP64
734.vpr_r: -DSPEC_LP64
735.gem5_r: -DSPEC_LP64
750.sealcrypto_r: -DSPEC_LP64
753.ns3_r: -DSPEC_LP64
777.zstd_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c18 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffp-model=fast
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2025.3/lib -lqkmallo
```

C++ benchmarks:

```
-m64 -std=c++17 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffp-model=fast
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2025.3/lib -lqkmallo
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xCORE-AVX512 -O3
-ffp-model=fast -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/opt/intel/oneapi/compiler/2025.3/lib
-lqkmallo
```



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2026_int_base = 1230

SPECrate®2026_int_peak = 1230

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Peak Optimization Flags

C benchmarks:

708.sqlite_r: basepeak = yes

714.cpython_r: basepeak = yes

777.zstd_r: basepeak = yes

C++ benchmarks:

706.stockfish_r: basepeak = yes

707.ntest_r: basepeak = yes

727.cppcheck_r: basepeak = yes

753.ns3_r: basepeak = yes

Benchmarks using both C and C++:

710.omnetpp_r: basepeak = yes

721.gcc_r: basepeak = yes

723.llvm_r: basepeak = yes

729.abc_r: basepeak = yes

734.vpr_r: basepeak = yes

735.gem5_r: basepeak = yes

750.sealcrypto_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-Intel-GNR-rev1.4.html>

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-Intel-GNR-rev1.4.xml>

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.xml>



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2026_int_base = 1230

SPECrate®2026_int_peak = 1230

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-05 21:13:59-0500.
Report generated on 2026-05-11 16:37:49 by CPU2026 PDF formatter (unknown).
Originally published on 2026-05-05.