



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant Compute DL580 Gen12


(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2026\_fp\_base = 5.87

SPECspeed®2026\_fp\_peak = 5.87

CPU2026 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Feb-2026  
Hardware Availability: Jul-2025  
Software Availability: Jan-2026

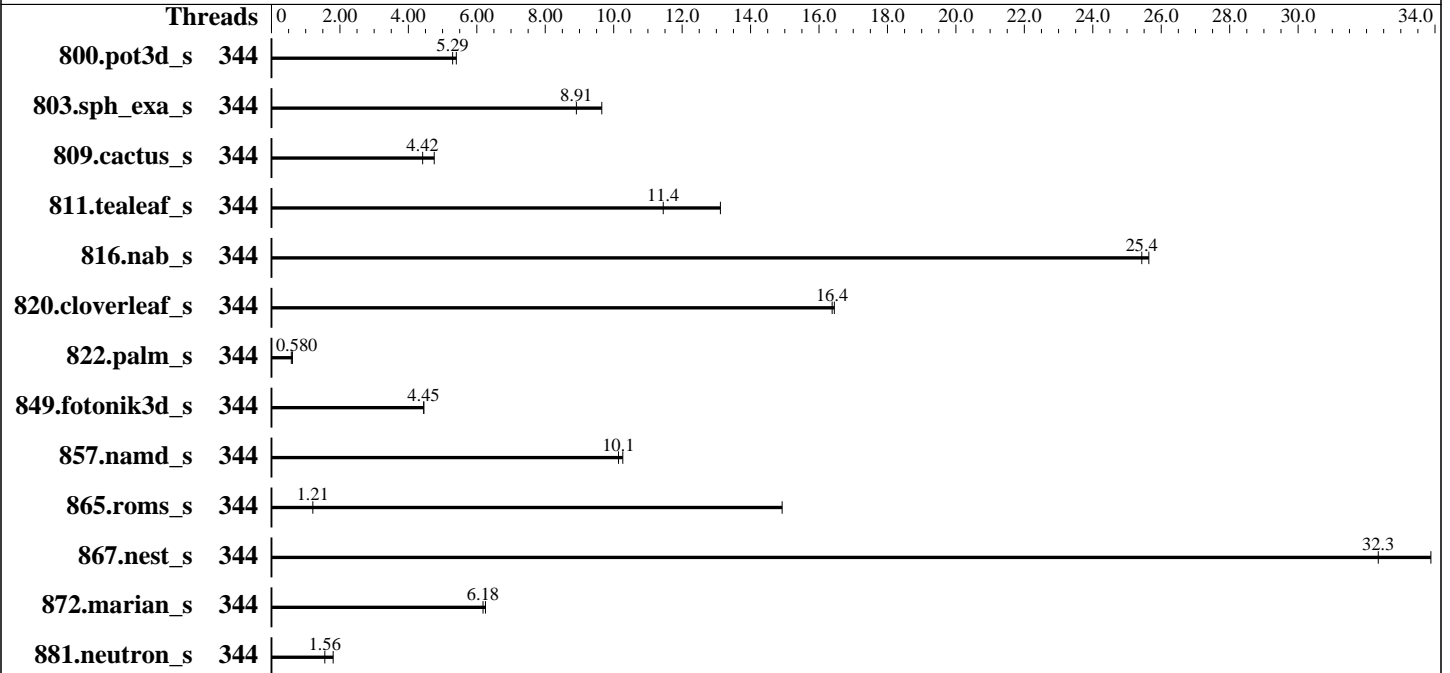

### Hardware

CPU Name: Intel Xeon 6788P  
 Max MHz: 3800  
 Nominal: 2000  
 Enabled: 344 cores, 4 chips  
 Orderable: 1,2,4 Chips  
 Cache L1: 64 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 336 MB I+D on chip per chip  
 Other: None  
 Memory: 2 TB (32 x 64 GB 2Rx4 PC5-6400B-R)  
 Storage: 1 x 1.6 TB NVMe SSD  
 Cooling: Air  
 Other: None

### Software

OS: Ubuntu 24.04.3 LTS  
 Kernel 6.8.0-94-generic  
 Compiler: C/C++: Version 2025.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2025.3 of Intel Fortran Compiler for Linux  
 Compiler Category: Vendor  
 Firmware: HPE BIOS Version v1.60 released Jan-2026  
 File System: ext4  
 System State: Run level 5 (multi-user, graphical)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator v5.3  
 Power Management: BIOS is set to prefer performance at the cost of additional power usage



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL580 Gen12  
(2.00 Ghz, Intel Xeon 6788P)

SPECSpeed®2026\_fp\_base = 5.87

SPECSpeed®2026\_fp\_peak = 5.87

CPU2026 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Feb-2026  
Hardware Availability: Jul-2025  
Software Availability: Jan-2026

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
800.pot3d_s	344	<u>127</u>	<u>5.29</u>	125	5.40			344	<u>127</u>	<u>5.29</u>	125	5.40		
803.sph_exa_s	344	<u>139</u>	<u>8.91</u>	128	9.65			344	<u>139</u>	<u>8.91</u>	128	9.65		
809.cactus_s	344	<u>254</u>	<u>4.42</u>	236	4.76			344	<u>254</u>	<u>4.42</u>	236	4.76		
811.tealeaf_s	344	<u>48.7</u>	<u>11.4</u>	42.5	13.1			344	<u>48.7</u>	<u>11.4</u>	42.5	13.1		
816.nab_s	344	<u>44.3</u>	<u>25.4</u>	43.9	25.6			344	<u>44.3</u>	<u>25.4</u>	43.9	25.6		
820.cloverleaf_s	344	<u>52.3</u>	<u>16.4</u>	52.1	16.4			344	<u>52.3</u>	<u>16.4</u>	52.1	16.4		
822.palm_s	344	2005	0.612	<u>2117</u>	<u>0.580</u>			344	2005	0.612	<u>2117</u>	<u>0.580</u>		
849.fotonik3d_s	344	148	4.45	<u>148</u>	<u>4.45</u>			344	148	4.45	<u>148</u>	<u>4.45</u>		
857.namd_s	344	141	10.3	<u>143</u>	<u>10.1</u>			344	141	10.3	<u>143</u>	<u>10.1</u>		
865.roms_s	344	<u>902</u>	<u>1.21</u>	73.0	14.9			344	<u>902</u>	<u>1.21</u>	73.0	14.9		
867.nest_s	344	<u>66.8</u>	<u>32.3</u>	63.8	33.9			344	<u>66.8</u>	<u>32.3</u>	63.8	33.9		
872.marian_s	344	<u>175</u>	<u>6.18</u>	173	6.25			344	<u>175</u>	<u>6.18</u>	173	6.25		
881.neutron_s	344	<u>523</u>	<u>1.56</u>	452	1.80			344	<u>523</u>	<u>1.56</u>	452	1.80		

SPECSpeed®2026\_fp\_base = **5.87**

SPECSpeed®2026\_fp\_peak = **5.87**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2026/lib"

MALLOC\_CONF = "retain:true"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Peak Frequency Compute

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL580 Gen12**  
(2.00 Ghz, Intel Xeon 6788P)

**SPECspeed®2026\_fp\_base = 5.87**

**SPECspeed®2026\_fp\_peak = 5.87**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Jul-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

Enhanced Processor Performance Profile set to Aggressive  
 Thermal Configuration set to Maximum Cooling  
 Memory Patrol Scrubbing set to Disabled  
 Last Level Cache (LLC) Prefetch set to Enabled  
 XPT Prefetch set to Disabled  
 Intel UPI Prefetch set to Disabled  
 Intel Hyper-Threading set to Disabled  
 Workload Profile set to Custom  
 Collaborative Power Control set to Enabled

sysinfo program /home/cpu2026/bin/sysinfo  
 Rev: 069f95da7e7f5d81b2ce48a82150e54f  
 running on admin1 Sat Feb 7 13:11:50 2026

SUT (System Under Test) info as seen by some common utilities.

-----  
 Table of contents  
 -----

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----  
 -----  
 1. uname -srvm  
 Linux 6.8.0-94-generic #96-Ubuntu SMP PREEMPT\_DYNAMIC Fri Jan 9 20:36:55 UTC 2026 x86\_64

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL580 Gen12**

(2.00 Ghz, Intel Xeon 6788P)

**SPECspeed®2026\_fp\_base = 5.87**

**SPECspeed®2026\_fp\_peak = 5.87**

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2026  
**Hardware Availability:** Jul-2025  
**Software Availability:** Jan-2026

## Platform Notes (Continued)

```

-----
2. w
   13:11:50 up 6:04, 3 users, load average: 160.41, 83.14, 46.18
USER      TTY      FROM          LOGIN@      IDLE        JCPU        PCPU        WHAT
admin1    -        172.16.0.100  07:16      6:03m      0.00s      0.01s      sshd: admin1 [priv]
admin1    -        172.16.0.100  07:13      6:03m      0.00s      0.03s      sshd: admin1 [priv]
admin1    tty1    -             07:10      6:01m      0.03s      0.01s      -bash

```

```

-----
3. Username
From environment variable $USER:  root
From the command 'logname':      admin1

```

```

-----
4. ulimit -a
time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)       0
memory(kbytes)         unlimited
locked memory(kbytes) 264157384
process                8254598
nofiles                1024
vmemory(kbytes)        unlimited
locks                  unlimited
rtprio                 0

```

```

-----
5. sysinfo process ancestry
/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: admin1 [priv]
sshd: admin1@pts/0
-bash
sudo -i
sudo -i
-bash
-bash
-bash
runcpu --nobuild --reportable --action validate --define default-platform-flags -c
ic2025.3-graniterapids-cpu2026-0.902-speed-20260121.cfg --threads 344 --define cores=344 --tune base -n 2
-o all --define drop_caches fpspeed
runcpu --nobuild --reportable --action validate --define default-platform-flags --configfile
ic2025.3-graniterapids-cpu2026-0.902-speed-20260121.cfg --threads 344 --define cores=344 --tune base
--iterations 2 --output_format all --define drop_caches --nopower --runmode speed --tune base --size

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL580 Gen12**

(2.00 Ghz, Intel Xeon 6788P)

**SPECspeed®2026\_fp\_base = 5.87**

**SPECspeed®2026\_fp\_peak = 5.87**

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2026  
**Hardware Availability:** Jul-2025  
**Software Availability:** Jan-2026

## Platform Notes (Continued)

```
refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.027/templogs/preenv.fpspeed.027.0.log --lognum 027.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026
```

-----  
6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6788P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 173
stepping        : 1
microcode       : 0x1000411
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi vmscape
cpu cores       : 86
siblings        : 86
```

4 physical ids (chips)

344 processors (hardware threads)

physical id 0: core ids 0-42,64-106

physical id 1: core ids 0-42,64-106

physical id 2: core ids 0-42,64-106

physical id 3: core ids 0-42,64-106

physical id 0: apicids

0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72,74,76,78,80,82,84,128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212

physical id 1: apicids

256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,308,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,436,438,440,442,444,446,448,450,452,454,456,458,460,462,464,466,468

physical id 2: apicids

512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,564,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,640,642,644,646,648,650,652,654,656,658,660,662,664,666,668,670,672,674,676,678,680,682,684,686,688,690,692,694,696,698,700,702,704,706,708,710,712,714,716,718,720,722,724

physical id 3: apicids

768,770,772,774,776,778,780,782,784,786,788,790,792,794,796,798,800,802,804,806,808,810,812,814,816,818,820,822,824,826,828,830,832,834,836,838,840,842,844,846,848,850,852,896,898,900,902,904,906,908,910,912,914,916,918,920,922,924,926,928,930,932,934,936,938,940,942,944,946,948,950,952,954,956,958,960,962,964,966,968,970,972,974,976,978,980

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL580 Gen12**

(2.00 Ghz, Intel Xeon 6788P)

**SPECspeed®2026\_fp\_base = 5.87**

**SPECspeed®2026\_fp\_peak = 5.87**

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2026  
**Hardware Availability:** Jul-2025  
**Software Availability:** Jan-2026

## Platform Notes (Continued)

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      344
On-line CPU(s) list:        0-343
Vendor ID:                   GenuineIntel
BIOS Vendor ID:             Intel(R) Corporation
Model name:                  Intel(R) Xeon(R) 6788P
BIOS Model name:            Intel(R) Xeon(R) 6788P  CPU @ 2.0GHz
BIOS CPU family:            179
CPU family:                  6
Model:                      173
Thread(s) per core:         1
Core(s) per socket:         86
Socket(s):                   4
Stepping:                   1
CPU(s) scaling MHz:         22%
CPU max MHz:                 3800.0000
CPU min MHz:                 800.0000
BogoMIPS:                   4000.00

```

Flags:

```

fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 cdp_l2 ssbd mba
ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad
fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a
avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt
avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi umip pku ospke
waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri
movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr
ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
arch_capabilities ibpb_exit_to_user

```

Virtualization:

```

VT-x
L1d cache:                  16.1 MiB (344 instances)
L1i cache:                  21.5 MiB (344 instances)
L2 cache:                   688 MiB (344 instances)
L3 cache:                   1.3 GiB (4 instances)

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL580 Gen12**

(2.00 Ghz, Intel Xeon 6788P)

**SPECspeed®2026\_fp\_base = 5.87**

**SPECspeed®2026\_fp\_peak = 5.87**

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2026  
**Hardware Availability:** Jul-2025  
**Software Availability:** Jan-2026

## Platform Notes (Continued)

```

NUMA node(s): 4
NUMA node0 CPU(s): 0-85
NUMA node1 CPU(s): 86-171
NUMA node2 CPU(s): 172-257
NUMA node3 CPU(s): 258-343
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                          PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
Vulnerability Vmscape: Mitigation; IBPB before exit to userspace

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	16.1M	12	Data	1	64	1	64
L1i	64K	21.5M	16	Instruction	1	64	1	64
L2	2M	688M	16	Unified	2	2048	1	64
L3	336M	1.3G	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-85
node 0 size: 515546 MB
node 0 free: 456583 MB
node 1 cpus: 86-171
node 1 size: 516066 MB
node 1 free: 511659 MB
node 2 cpus: 172-257
node 2 size: 516066 MB
node 2 free: 497437 MB
node 3 cpus: 258-343
node 3 size: 516049 MB
node 3 free: 508734 MB
node distances:
node  0  1  2  3

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL580 Gen12**

(2.00 Ghz, Intel Xeon 6788P)

**SPECspeed®2026\_fp\_base = 5.87**

**SPECspeed®2026\_fp\_peak = 5.87**

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2026  
**Hardware Availability:** Jul-2025  
**Software Availability:** Jan-2026

## Platform Notes (Continued)

```
0: 10 21 21 21
1: 21 10 21 21
2: 21 21 10 21
3: 21 21 21 10
```

9. /proc/meminfo  
MemTotal: 2113259076 kB

10. who -r  
run-level 5 Feb 7 07:08

11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)  
Default Target Status  
graphical running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell iscsid nftables rsync serial-getty@ ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext systemd-time-wait-sync upower
indirect	systemd-sysupdate systemd-sysupdate-reboot uidd
masked	cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-6.8.0-94-generic  
root=UUID=1167c2a9-3418-41e4-8aa6-434d83833b85  
ro

14. cpupower frequency-info  
analyzing CPU 7:

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL580 Gen12**

(2.00 Ghz, Intel Xeon 6788P)

**SPECspeed®2026\_fp\_base = 5.87**

**SPECspeed®2026\_fp\_peak = 5.87**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Jul-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

current policy: frequency should be within 800 MHz and 3.80 GHz.  
The governor "powersave" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

-----  
15. tuned-adm active

Current active profile: balanced

-----  
16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

-----  
17. /sys/kernel/mm/transparent\_hugepage

defrag	always	defer	defer+madvise	[madvise]	never
enabled	always	[madvise]	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL580 Gen12**  
(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2026\_fp\_base = 5.87

SPECspeed®2026\_fp\_peak = 5.87

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Jul-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

```
pages_to_scan          4096
scan_sleep_millisecs   10000
```

### 19. OS release

```
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS
```

### 20. Disk information

SPEC is set to: /home/cpu2026

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p2  ext4  1.5T  329G  1.1T  24% /
```

### 21. /sys/devices/virtual/dmi/id

```
Vendor:          HPE
Product:         HPE ProLiant Compute DL580 Gen12
Product Family: ProLiant
Serial:          7CED2FP013
```

### 22. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
31x Hynix HMCG94AHBRA480N 64 GB 2 rank 6400
1x Hynix HMCG94AHBRA487N 64 GB 2 rank 6400
```

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      HPE
BIOS Version:     1.60
BIOS Date:        01/09/2026
BIOS Revision:    1.60
Firmware Revision: 1.19
```

## Compiler Version Notes

```
=====  
C      | 811.tealeaf_s(base) 816.nab_s(base) 881.neutron_s(base)  
=====
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL580 Gen12**

(2.00 Ghz, Intel Xeon 6788P)

**SPECspeed®2026\_fp\_base = 5.87**

**SPECspeed®2026\_fp\_peak = 5.87**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Jul-2025

**Software Availability:** Jan-2026

## Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

=====  
C++ | 803.sph\_exa\_s(base) 857.namd\_s(base) 867.nest\_s(base)  
| 872.marian\_s(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

=====  
C++, C | 809.cactus\_s(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

=====  
Fortran | 800.pot3d\_s(base) 820.cloverleaf\_s(base) 822.palm\_s(base)  
| 849.fotonik3d\_s(base) 865.roms\_s(base)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both C and C++:

icpx icx



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL580 Gen12**

(2.00 Ghz, Intel Xeon 6788P)

**SPECspeed®2026\_fp\_base = 5.87**

**SPECspeed®2026\_fp\_peak = 5.87**

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2026  
**Hardware Availability:** Jul-2025  
**Software Availability:** Jan-2026

## Base Portability Flags

800.pot3d\_s: -DSPEC\_LP64  
803.sph\_exa\_s: -DSPEC\_LP64  
809.cactus\_s: -DSPEC\_LP64  
811.tealeaf\_s: -DSPEC\_LP64  
816.nab\_s: -DSPEC\_LP64  
820.cloverleaf\_s: -DSPEC\_LP64  
822.palm\_s: -DSPEC\_LP64  
849.fotonik3d\_s: -DSPEC\_LP64  
857.namd\_s: -DSPEC\_LP64  
865.roms\_s: -DSPEC\_LP64  
867.nest\_s: -DSPEC\_LP64  
872.marian\_s: -DSPEC\_LP64  
881.neutron\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-z,muldefs -xgraniterapids  
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC\_OPENMP  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

C++ benchmarks:

803.sph\_exa\_s: -m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids  
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-fiopenmp -DSPEC\_OPENMP -L/usr/local/jemalloc-5.3.0/lib  
-ljemalloc

857.namd\_s: Same as 803.sph\_exa\_s

867.nest\_s: Same as 803.sph\_exa\_s

872.marian\_s: -m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids  
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-pthread -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

Fortran benchmarks:

-m64 -stand f18 -Wl,-z,muldefs -xgraniterapids  
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -DSPEC\_OPENMP -fiopenmp  
-nostandard-realloc-lhs -align array32byte -auto

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL580 Gen12**

(2.00 Ghz, Intel Xeon 6788P)

SPECspeed®2026\_fp\_base = 5.87

SPECspeed®2026\_fp\_peak = 5.87

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Jul-2025

**Software Availability:** Jan-2026

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

`-L/usr/local/jemalloc-5.3.0/lib -ljemalloc`

Benchmarks using both C and C++:

`-m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xgraniterapids  
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc`

## Peak Optimization Flags

C benchmarks:

811.tealeaf\_s: basepeak = yes

816.nab\_s: basepeak = yes

881.neutron\_s: basepeak = yes

C++ benchmarks:

803.sph\_exa\_s: basepeak = yes

857.namd\_s: basepeak = yes

867.nest\_s: basepeak = yes

872.marian\_s: basepeak = yes

Fortran benchmarks:

800.pot3d\_s: basepeak = yes

820.cloverleaf\_s: basepeak = yes

822.palm\_s: basepeak = yes

849.fotonik3d\_s: basepeak = yes

865.roms\_s: basepeak = yes

Benchmarks using both C and C++:

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL580 Gen12**

(2.00 Ghz, Intel Xeon 6788P)

**SPECspeed®2026\_fp\_base = 5.87**

**SPECspeed®2026\_fp\_peak = 5.87**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Jul-2025

**Software Availability:** Jan-2026

## Peak Optimization Flags (Continued)

809.cactus\_s:basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-Intel-GNR-rev1.4.html>

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-Intel-GNR-rev1.4.xml>

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-07 08:11:49-0500.

Report generated on 2026-05-04 23:32:58 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.