



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL325 Gen11


(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_fp\_base = 12.5

SPECspeed®2026\_fp\_peak = 12.5

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2026  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jan-2026

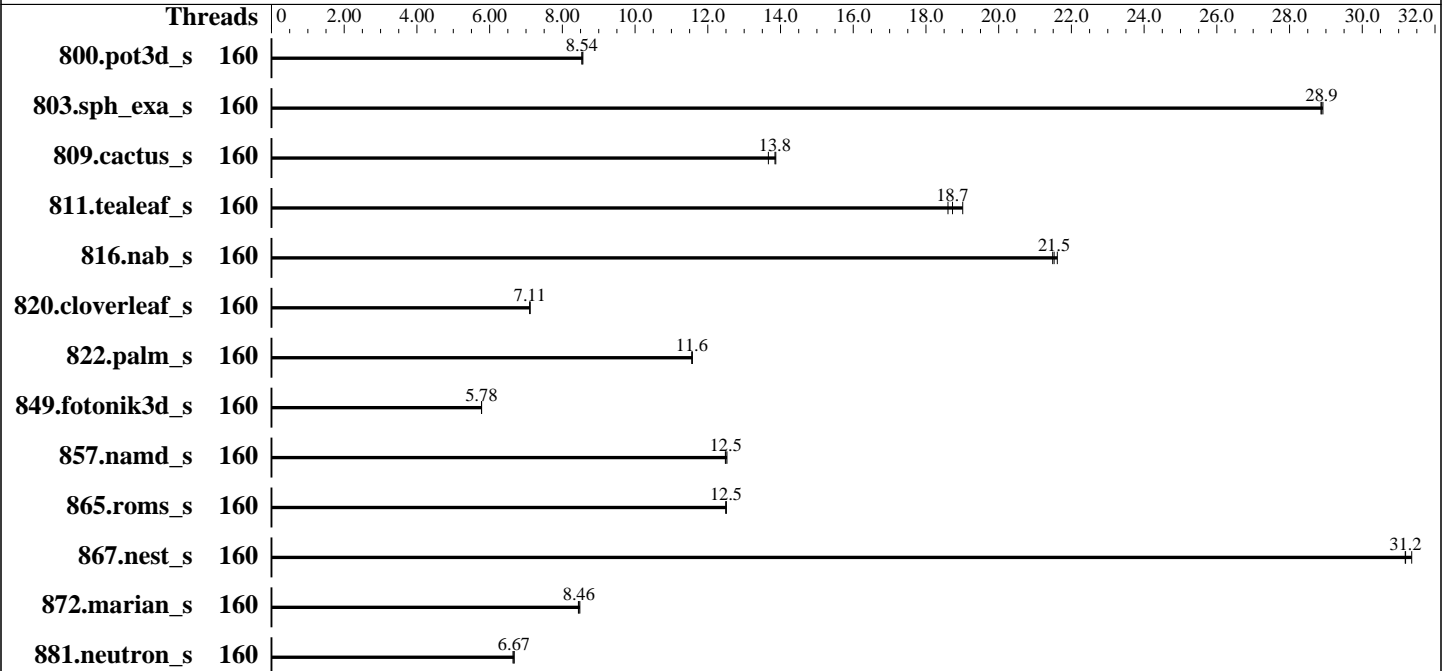

### Hardware

CPU Name: AMD EPYC 9845  
 Max MHz: 3700  
 Nominal: 2100  
 Enabled: 160 cores, 1 chip  
 Orderable: 1 Chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 320 MB I+D on chip per chip,  
 32 MB shared / 16 cores  
 Other: None  
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R)  
 Storage: 1 x 480 GB NVMe SSD  
 Cooling: CLC  
 Other: None

### Software

OS: Ubuntu 24.04.3 LTS  
 Kernel 6.8.0-94-generic  
 Compiler: C/C++: Version 5.1.0 of AOCC  
 Fortran: Flang v22  
 Compiler Category: Vendor  
 Firmware: HPE BIOS Version v2.90  
 released Jan-2026  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS is set to prefer performance at the cost of additional power usage



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_fp\_base = 12.5

SPECspeed®2026\_fp\_peak = 12.5

CPU2026 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Jan-2026

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
800.pot3d_s	160	<b>78.8</b>	<b>8.54</b>	78.8	8.54	78.6	8.56	160	<b>78.8</b>	<b>8.54</b>	78.8	8.54	78.6	8.56
803.sph_exa_s	160	<b>42.9</b>	<b>28.9</b>	42.8	28.9	42.9	28.9	160	<b>42.9</b>	<b>28.9</b>	42.8	28.9	42.9	28.9
809.cactus_s	160	82.1	13.7	<b>81.0</b>	<b>13.8</b>	80.9	13.9	160	82.1	13.7	<b>81.0</b>	<b>13.8</b>	80.9	13.9
811.tealeaf_s	160	29.3	19.0	29.9	18.6	<b>29.7</b>	<b>18.7</b>	160	29.3	19.0	29.9	18.6	<b>29.7</b>	<b>18.7</b>
816.nab_s	160	52.1	21.6	<b>52.3</b>	<b>21.5</b>	52.4	21.5	160	52.1	21.6	<b>52.3</b>	<b>21.5</b>	52.4	21.5
820.cloverleaf_s	160	121	7.11	121	7.10	<b>121</b>	<b>7.11</b>	160	121	7.11	121	7.10	<b>121</b>	<b>7.11</b>
822.palm_s	160	<b>106</b>	<b>11.6</b>	106	11.6	106	11.6	160	<b>106</b>	<b>11.6</b>	106	11.6	106	11.6
849.fotonik3d_s	160	114	5.78	114	5.78	<b>114</b>	<b>5.78</b>	160	114	5.78	114	5.78	<b>114</b>	<b>5.78</b>
857.namd_s	160	116	12.5	<b>116</b>	<b>12.5</b>	116	12.5	160	116	12.5	<b>116</b>	<b>12.5</b>	116	12.5
865.roms_s	160	87.2	12.5	<b>87.2</b>	<b>12.5</b>	87.1	12.5	160	87.2	12.5	<b>87.2</b>	<b>12.5</b>	87.1	12.5
867.nest_s	160	68.9	31.4	<b>69.2</b>	<b>31.2</b>	69.3	31.2	160	68.9	31.4	<b>69.2</b>	<b>31.2</b>	69.3	31.2
872.marian_s	160	<b>128</b>	<b>8.46</b>	128	8.48	128	8.44	160	<b>128</b>	<b>8.46</b>	128	8.48	128	8.44
881.neutron_s	160	122	6.67	<b>122</b>	<b>6.67</b>	123	6.64	160	122	6.67	<b>122</b>	<b>6.67</b>	123	6.64

SPECspeed®2026\_fp\_base = 12.5

SPECspeed®2026\_fp\_peak = 12.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>  
Flang v22 is available at  
<https://flang.llvm.org/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_fp\_base = 12.5

SPECspeed®2026\_fp\_peak = 12.5

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2026  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jan-2026

## Operating System Notes (Continued)

'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.  
To enable Transparent Hugepages (THP) for all allocations, 'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and 'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-159"  
LD\_LIBRARY\_PATH =  
"/home/cpu2026/amd\_speed\_aocc510\_flang22\_znver5\_A\_lib/lib:/home/cpu2026/  
amd\_speed\_aocc510\_flang22\_znver5\_A\_lib/lib32:"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries were compiled on a system with an AMD EPYC 9754 CPU + 768 GiB Memory using Ubuntu 24.04  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configurations : Parameters are selected in the order shown below  
Workload Profile set to General Peak Frequency Compute  
Determinism Control set to Manual  
Performance Determinism set to Power Deterministic  
Memory Patrol Scrubbing set to Disabled  
Last-Level Cache (LLC) as NUMA Node set to Enabled  
ACPI CST C2 Latency set to 18 microseconds  
Thermal Configuration set to Maximum Cooling  
AMD SMT Option set to Disabled  
Workload Profile set to Custom  
Power Regulator set to OS Control Mode  
  
Sysinfo program /home/cpu2026/bin/sysinfo

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_fp\_base = 12.5

SPECspeed®2026\_fp\_peak = 12.5

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2026  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jan-2026

## Platform Notes (Continued)

Rev: 069f95da7e7f5d81b2ce48a82150e54f  
running on admin1 Tue Nov 25 18:40:30 2025

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

- 1. uname -srvm
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent\_hugepage
- 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

-----  
1. uname -srvm  
Linux 6.8.0-94-generic #96-Ubuntu SMP PREEMPT\_DYNAMIC Fri Jan 9 20:36:55 UTC 2026 x86\_64

-----  
2. w  
18:40:30 up 24 min, 2 users, load average: 0.00, 0.00, 0.00  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
admin1 172.16.0.100 18:21 23:59 0.00s 0.02s sshd: admin1 [priv]  
admin1 tty1 - 18:19 20:52 0.04s 0.01s -bash

-----  
3. Username  
From environment variable \$USER: root

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_fp\_base = 12.5

SPECspeed®2026\_fp\_peak = 12.5

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

From the command 'logname': admin1

-----  
4. ulimit -a

```
time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)      0
memory(kbytes)         unlimited
locked memory(kbytes) 2097152
process                3094317
nofiles                1024
vmemory(kbytes)       unlimited
locks                  unlimited
rtprio                 0
```

-----  
5. sysinfo process ancestry

```
/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: admin1 [priv]
sshd: admin1@pts/0
-bash
sudo ./run_fpspeed.py
sudo ./run_fpspeed.py
python3 ./run_fpspeed.py
/bin/bash ./amd_speed_aocc510_flang22_znver5_A1.sh
runcpu --config amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 3
--nopower --runmode speed --tune base --size test:train:refspeed fpspeed --nopreenv --note-preenv
--logfile $SPEC/tmp/CPU2026.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026
```

-----  
6. /proc/cpuinfo

```
model name      : AMD EPYC 9845 160-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 17
stepping       : 0
microcode      : 0xb101054
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores      : 160
siblings       : 160
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL325 Gen11**

(2.10 GHz, AMD EPYC 9845)

**SPECspeed®2026\_fp\_base = 12.5**

**SPECspeed®2026\_fp\_peak = 12.5**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

1 physical ids (chips)  
160 processors (hardware threads)  
physical id 0: core ids 0-159  
physical id 0: apicids 0-159

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                       160
On-line CPU(s) list:         0-159
Vendor ID:                   AuthenticAMD
BIOS Vendor ID:              Advanced Micro Devices, Inc.
Model name:                   AMD EPYC 9845 160-Core Processor
BIOS Model name:             AMD EPYC 9845 160-Core Processor      CPU @ 2.1GHz
BIOS CPU family:             107
CPU family:                   26
Model:                        17
Thread(s) per core:          1
Core(s) per socket:          160
Socket(s):                   1
Stepping:                    0
Frequency boost:              enabled
CPU(s) scaling MHz:          105%
CPU max MHz:                  2100.0000
CPU min MHz:                  1500.0000
BogoMIPS:                     4193.78

```

```

Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_fp\_base = 12.5

SPECspeed®2026\_fp\_peak = 12.5

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2026  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jan-2026

## Platform Notes (Continued)

svm\_lock nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists  
pausefilter pfthreshold avic v\_vmsave\_vmload vgif x2avic v\_spec\_ctrl  
vnmi avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq  
avx512\_vnni avx512\_bitalg avx512\_vpopcntdq la57 rdpid bus\_lock\_detect  
movdiri movdir64b overflow\_recov succor smca fsrm avx512\_vp2intersect  
flush\_llid debug\_swap

```

Virtualization: AMD-V
L1d cache: 7.5 MiB (160 instances)
L1i cache: 5 MiB (160 instances)
L2 cache: 160 MiB (160 instances)
L3 cache: 320 MiB (10 instances)
NUMA node(s): 10
NUMA node0 CPU(s): 0-15
NUMA node1 CPU(s): 16-31
NUMA node2 CPU(s): 32-47
NUMA node3 CPU(s): 48-63
NUMA node4 CPU(s): 64-79
NUMA node5 CPU(s): 80-95
NUMA node6 CPU(s): 96-111
NUMA node7 CPU(s): 112-127
NUMA node8 CPU(s): 128-143
NUMA node9 CPU(s): 144-159
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
Vulnerability Vmscape: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	7.5M	12	Data	1	64	1	64
L1i	32K	5M	8	Instruction	1	64	1	64
L2	1M	160M	16	Unified	2	1024	1	64
L3	32M	320M	16	Unified	3	32768	1	64

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL325 Gen11**

**(2.10 GHz, AMD EPYC 9845)**

**SPECspeed®2026\_fp\_base = 12.5**

**SPECspeed®2026\_fp\_peak = 12.5**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 10 nodes (0-9)

node 0 cpus: 0-15

node 0 size: 77093 MB

node 0 free: 76854 MB

node 1 cpus: 16-31

node 1 size: 77408 MB

node 1 free: 77207 MB

node 2 cpus: 32-47

node 2 size: 77410 MB

node 2 free: 77228 MB

node 3 cpus: 48-63

node 3 size: 77408 MB

node 3 free: 77238 MB

node 4 cpus: 64-79

node 4 size: 77410 MB

node 4 free: 77150 MB

node 5 cpus: 80-95

node 5 size: 77410 MB

node 5 free: 76968 MB

node 6 cpus: 96-111

node 6 size: 77408 MB

node 6 free: 77120 MB

node 7 cpus: 112-127

node 7 size: 77410 MB

node 7 free: 76553 MB

node 8 cpus: 128-143

node 8 size: 77410 MB

node 8 free: 77231 MB

node 9 cpus: 144-159

node 9 size: 77288 MB

node 9 free: 77101 MB

node distances:

node	0	1	2	3	4	5	6	7	8	9
0:	10	11	11	11	11	11	11	11	11	11
1:	11	10	11	11	11	11	11	11	11	11
2:	11	11	10	11	11	11	11	11	11	11
3:	11	11	11	10	11	11	11	11	11	11
4:	11	11	11	11	10	11	11	11	11	11
5:	11	11	11	11	11	10	11	11	11	11
6:	11	11	11	11	11	11	10	11	11	11
7:	11	11	11	11	11	11	11	10	11	11
8:	11	11	11	11	11	11	11	11	10	11
9:	11	11	11	11	11	11	11	11	11	10

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_fp\_base = 12.5

SPECspeed®2026\_fp\_peak = 12.5

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

## Platform Notes (Continued)

9. /proc/meminfo

MemTotal: 792227000 kB

10. who -r

run-level 5 Nov 25 18:16

11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)

Default Target Status  
graphical running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell iscsid nftables rsync serial-getty@ ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext systemd-time-wait-sync systemd-timesyncd upower
indirect	systemd-sysupdate systemd-sysupdate-reboot uidd
masked	cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=/boot/vmlinuz-6.8.0-94-generic  
root=UUID=c8895b10-3344-47fb-81a4-2b6fb85bbd20  
ro

14. cpupower frequency-info

analyzing CPU 36:  
current policy: frequency should be within 1.50 GHz and 2.10 GHz.  
The governor "performance" may decide which speed to use within this range.  
boost state support:  
Supported: yes  
Active: yes

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_fp\_base = 12.5

SPECspeed®2026\_fp\_peak = 12.5

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

## Platform Notes (Continued)

Boost States: 0  
Total States: 3  
Pstate-P0: 2100MHz

-----  
15. tuned-adm active  
Current active profile: balanced

-----  
16. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 0  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 8  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 1  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 1

-----  
17. /sys/kernel/mm/transparent\_hugepage  
defrag [always] defer defer+madvise madvise never  
enabled [always] madvise never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_fp\_base = 12.5

SPECspeed®2026\_fp\_peak = 12.5

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

## Platform Notes (Continued)

### 19. OS release

From /etc/\*-release /etc/\*-version  
os-release Ubuntu 24.04.3 LTS

### 20. Disk information

SPEC is set to: /home/cpu2026

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0nlp2	ext4	438G	93G	323G	23%	/

### 21. /sys/devices/virtual/dmi/id

Vendor: HPE  
 Product: ProLiant DL325 Gen11  
 Product Family: ProLiant  
 Serial: DL325G11-008

### 22. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

1x Micron MTC40F2046S1RC64BD2 MFFF 64 GB 2 rank 6400  
 11x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE  
 BIOS Version: 2.90  
 BIOS Date: 01/09/2026  
 BIOS Revision: 2.90  
 Firmware Revision: 1.70

## Compiler Version Notes

```
=====  
C      | 811.tealeaf_s(base) 816.nab_s(base) 881.neutron_s(base)  
=====
```

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
 Target: x86\_64-unknown-linux-gnu  
 Thread model: posix

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_fp\_base = 12.5

SPECspeed®2026\_fp\_peak = 12.5

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2026  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jan-2026

## Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====  
C++ | 803.sph\_exa\_s(base) 857.namd\_s(base) 867.nest\_s(base)  
| 872.marian\_s(base)

-----  
AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====  
C++, C | 809.cactus\_s(base)

-----  
AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====  
Fortran | 800.pot3d\_s(base) 820.cloverleaf\_s(base) 822.palm\_s(base)  
| 849.fotonik3d\_s(base) 865.roms\_s(base)

-----  
flang version 22.1.0-rc2 (<https://github.com/llvm/llvm-project>  
a47b42eb9f9b302167b4fc413e6c92798d65dd0b)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/llvm/llvm-22.1.0-rc2/install/bin

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang-22

Benchmarks using both C and C++:  
clang++ clang



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL325 Gen11**

(2.10 GHz, AMD EPYC 9845)

**SPECspeed®2026\_fp\_base = 12.5**

**SPECspeed®2026\_fp\_peak = 12.5**

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2026  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jan-2026

## Base Portability Flags

800.pot3d\_s: -DSPEC\_LP64  
803.sph\_exa\_s: -DSPEC\_LP64  
809.cactus\_s: -DSPEC\_LP64  
811.tealeaf\_s: -DSPEC\_LP64  
816.nab\_s: -DSPEC\_LP64  
820.cloverleaf\_s: -DSPEC\_LP64  
822.palm\_s: -DSPEC\_LP64  
849.fotonik3d\_s: -DSPEC\_LP64  
857.namd\_s: -DSPEC\_LP64  
865.roms\_s: -DSPEC\_LP64  
867.nest\_s: -fno-finite-math-only -DSPEC\_LP64  
872.marian\_s: -DSPEC\_LP64  
881.neutron\_s: -DSPEC\_LP64

## Base Optimization Flags

### C benchmarks:

-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5  
-fveclib=AMDLIBM -ffast-math -fremap-arrays -fstrip-mining  
-fstruct-layout=7 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt  
-mrecip=none -fopenmp -DSPEC\_OPENMP -lamdalloc -lamdlibm  
-fopenmp=libomp -lomp

### C++ benchmarks:

-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5  
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -fopenmp -DSPEC\_OPENMP  
-pthread -lamdalloc -lamdlibm -fopenmp=libomp -lomp

### Fortran benchmarks:

-m64 -std=f2018 -O3 -flto -march=znver5 -fveclib=AMDLIBM  
-ffast-math -funroll-loops -DSPEC\_OPENMP -fopenmp  
-fdo-concurrent-to-openmp=host -lamdalloc -lamdlibm -fopenmp=libomp  
-lomp

### Benchmarks using both C and C++:

-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5  
-fveclib=AMDLIBM -ffast-math -fremap-arrays -fstrip-mining  
-fstruct-layout=7 -mllvm -inline-threshold=1000

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_fp\_base = 12.5

SPECspeed®2026\_fp\_peak = 12.5

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2026  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jan-2026

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mrecip=none -fopenmp -DSPEC_OPENMP -pthread -lamdalloc -lamdlibm
-fopenmp=libomp -lomp
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

## Peak Optimization Flags

C benchmarks:

811.tealeaf\_s: basepeak = yes

816.nab\_s: basepeak = yes

881.neutron\_s: basepeak = yes

C++ benchmarks:

803.sph\_exa\_s: basepeak = yes

857.namd\_s: basepeak = yes

867.nest\_s: basepeak = yes

872.marian\_s: basepeak = yes

Fortran benchmarks:

800.pot3d\_s: basepeak = yes

820.cloverleaf\_s: basepeak = yes

822.palm\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_fp\_base = 12.5

SPECspeed®2026\_fp\_peak = 12.5

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Peak Optimization Flags (Continued)

849.fotonik3d\_s: basepeak = yes

865.roms\_s: basepeak = yes

Benchmarks using both C and C++:

809.cactus\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.html>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.xml>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2026 v0.902.0 on 2025-11-25 13:40:30-0500.

Report generated on 2026-05-04 23:33:22 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.