



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2026_int_base = 505

SPECrate®2026_int_peak = 505

CPU2026 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

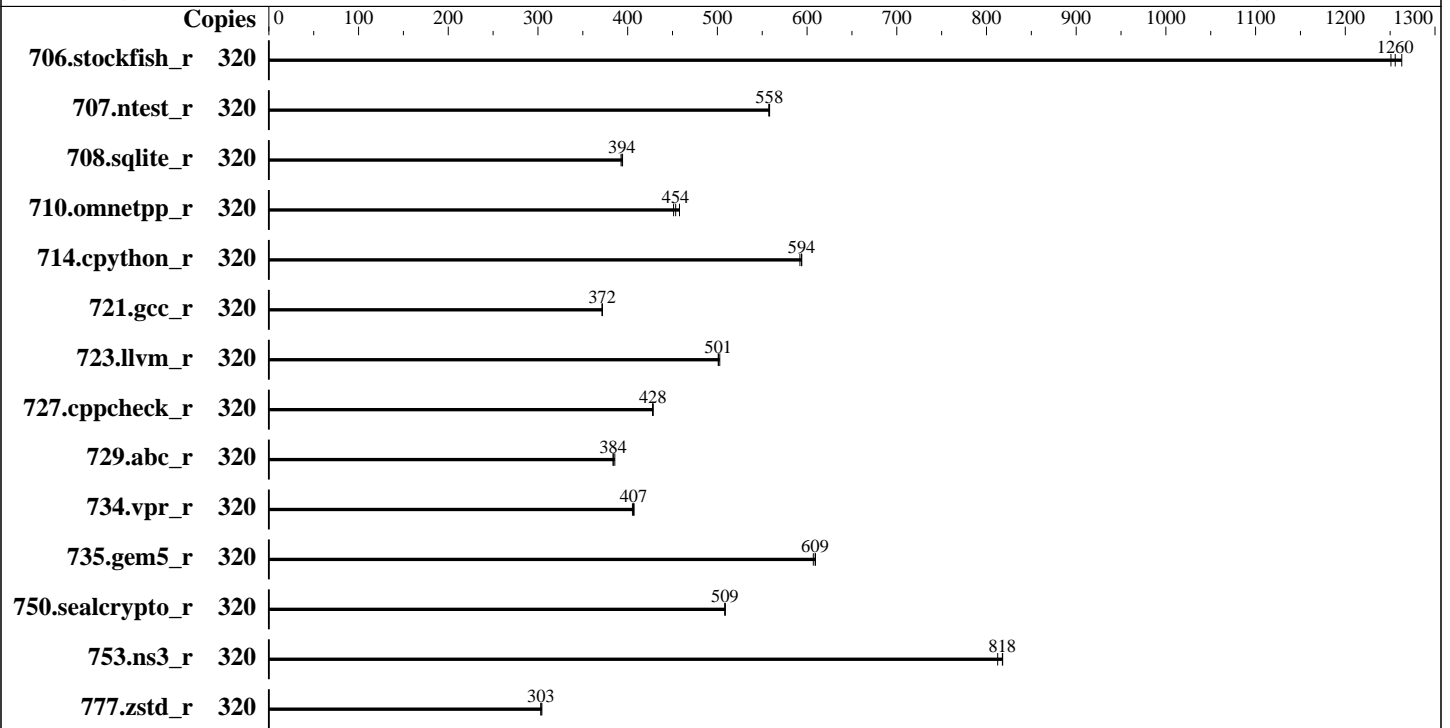

Hardware

CPU Name: AMD EPYC 9845
 Max MHz: 3700
 Nominal: 2100
 Enabled: 160 cores, 1 chip, 2 threads/core
 Orderable: 1 Chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 320 MB I+D on chip per chip,
 32 MB shared / 16 cores
 Other: None
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 1 x 480 GB NVMe SSD
 Cooling: CLC
 Other: None

Software

OS: Ubuntu 24.04.3 LTS
 Kernel 6.8.0-90-generic
 Compiler: C/C++/Fortran: Version 5.1.0 of AOCC
 Compiler Category: Vendor
 Firmware: HPE BIOS Version v2.90
 released Jan-2026
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS is set to prefer performance at the cost of additional power usage



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2026_int_base = 505

SPECrate®2026_int_peak = 505

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2026
Hardware Availability: Mar-2025
Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
706.stockfish_r	320	319	1260	<u>321</u>	<u>1260</u>	322	1250	320	319	1260	<u>321</u>	<u>1260</u>	322	1250
707.ntest_r	320	339	558	340	557	<u>339</u>	<u>558</u>	320	339	558	340	557	<u>339</u>	<u>558</u>
708.sqlite_r	320	429	394	<u>429</u>	<u>394</u>	430	393	320	429	394	<u>429</u>	<u>394</u>	430	393
710.omnetpp_r	320	340	458	345	451	<u>343</u>	<u>454</u>	320	340	458	345	451	<u>343</u>	<u>454</u>
714.cpython_r	320	<u>258</u>	<u>594</u>	259	592	258	594	320	<u>258</u>	<u>594</u>	259	592	258	594
721.gcc_r	320	<u>591</u>	<u>372</u>	591	371	590	372	320	<u>591</u>	<u>372</u>	591	371	590	372
723.llvm_r	320	<u>324</u>	<u>501</u>	324	501	323	503	320	<u>324</u>	<u>501</u>	324	501	323	503
727.cppcheck_r	320	269	428	<u>268</u>	<u>428</u>	268	428	320	269	428	<u>268</u>	<u>428</u>	268	428
729.abc_r	320	381	386	<u>383</u>	<u>384</u>	383	384	320	381	386	<u>383</u>	<u>384</u>	383	384
734.vpr_r	320	362	407	364	405	<u>363</u>	<u>407</u>	320	362	407	364	405	<u>363</u>	<u>407</u>
735.gem5_r	320	256	609	257	607	<u>256</u>	<u>609</u>	320	256	609	257	607	<u>256</u>	<u>609</u>
750.sealcrypto_r	320	337	509	<u>337</u>	<u>509</u>	337	508	320	337	509	<u>337</u>	<u>509</u>	337	508
753.ns3_r	320	241	812	240	818	<u>240</u>	<u>818</u>	320	241	812	240	818	<u>240</u>	<u>818</u>
777.zstd_r	320	677	304	680	303	<u>679</u>	<u>303</u>	320	677	304	680	303	<u>679</u>	<u>303</u>

SPECrate®2026_int_base = **505**

SPECrate®2026_int_peak = **505**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2026_int_base = 505

SPECrate®2026_int_peak = 505

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

Operating System Notes (Continued)

To free node-local memory and avoid remote memory usage,
 'sysctl -w vm.zone_reclaim_mode=1' run as root.
 To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
 To disable address space layout randomization (ASLR) to reduce run-to-run
 variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
 To enable Transparent Hugepages (THP) for all allocations,
 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
 LD_LIBRARY_PATH =
 "/home/cpu2026/amd_rate_aocc510_znver5_A_lib/lib:/home/cpu2026/amd_rate_
 aocc510_znver5_A_lib/lib32:"
 MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB
 Memory using Ubuntu 24.04
 NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below
 Workload Profile set to General Throughput Compute
 Determinism Control set to Manual
 Performance Determinism set to Power Deterministic
 Memory Patrol Scrubbing set to Disabled
 ACPI CST C2 Latency set to 18 microseconds
 NUMA memory domains per socket set to Two memory domains per socket
 Thermal Configuration set to Maximum Cooling
 AMD Periodic Directory Rinse set to Periodic
 Workload Profile set to Custom
 Power Regulator set to OS Control Mode
 Sysinfo program /home/cpu2026/bin/sysinfo

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2026_int_base = 505

SPECrate®2026_int_peak = 505

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

Platform Notes (Continued)

Rev: 069f95da7e7f5d81b2ce48a82150e54f
running on admin1 Thu Jan 29 02:25:56 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -srvm
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

1. uname -srvm
Linux 6.8.0-90-generic #91-Ubuntu SMP PREEMPT_DYNAMIC Tue Nov 18 14:14:30 UTC 2025 x86_64

2. w
02:25:56 up 4 min, 6 users, load average: 0.15, 0.03, 0.01
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
admin1 172.16.0.111 02:25 4:30 0.00s 0.01s sshd: admin1 [priv]
admin1 172.16.0.111 02:25 4:30 0.00s 0.01s sshd: admin1 [priv]
admin1 172.16.0.111 02:25 4:30 0.00s 0.01s sshd: admin1 [priv]
admin1 172.16.0.111 02:25 4:30 0.00s 0.01s sshd: admin1 [priv]
admin1 172.16.0.100 02:25 4:30 0.00s 0.02s sshd: admin1 [priv]
admin1 172.16.0.100 02:22 4:30 0.00s 0.01s sshd: admin1 [priv]

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2026_int_base = 505

SPECrate®2026_int_peak = 505

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

Platform Notes (Continued)

3. Username

From environment variable \$USER: root
From the command 'logname': admin1

4. ulimit -a

```
time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)       0
memory(kbytes)         unlimited
locked memory(kbytes) 2097152
process                3093824
nofiles                1024
vmemory(kbytes)       unlimited
locks                  unlimited
rtprio                 0
```

5. sysinfo process ancestry

```
/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: admin1 [priv]
sshd: admin1@notty
/bin/bash $SPEC/run_intrate_sh.sh
sudo ./run_intrate.py
python3 ./run_intrate.py
/bin/bash ./amd_rate_aocc510_znver5_A1.sh
runcpu --config amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9845 160-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 17
stepping       : 0
microcode      : 0xb101054
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2026_int_base = 505

SPECrate®2026_int_peak = 505

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

Platform Notes (Continued)

```

TLB size      : 192 4K pages
cpu cores     : 160
siblings      : 320
1 physical ids (chips)
320 processors (hardware threads)
physical id 0: core ids 0-159
physical id 0: apicids 0-319

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                       320
On-line CPU(s) list:         0-319
Vendor ID:                   AuthenticAMD
BIOS Vendor ID:              Advanced Micro Devices, Inc.
Model name:                  AMD EPYC 9845 160-Core Processor
BIOS Model name:             AMD EPYC 9845 160-Core Processor      CPU @ 2.1GHz
BIOS CPU family:             107
CPU family:                  26
Model:                       17
Thread(s) per core:          2
Core(s) per socket:          160
Socket(s):                   1
Stepping:                    0
Frequency boost:             enabled
CPU(s) scaling MHz:          102%
CPU max MHz:                 2100.0000
CPU min MHz:                 1500.0000
BogoMIPS:                    4193.78

```

```

Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt

```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2026_int_base = 505

SPECrate®2026_int_peak = 505

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2026
Hardware Availability: Mar-2025
Software Availability: Jan-2026

Platform Notes (Continued)

```
xsavvec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
vnni avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpcmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_llid debug_swap
```

```
Virtualization: AMD-V
L1d cache: 7.5 MiB (160 instances)
L1i cache: 5 MiB (160 instances)
L2 cache: 160 MiB (160 instances)
L3 cache: 320 MiB (10 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-79,160-239
NUMA node1 CPU(s): 80-159,240-319
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRBS-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
Vulnerability Vmscape: Not affected
```

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	7.5M	12	Data	1	64	1	64
L1i	32K	5M	8	Instruction	1	64	1	64
L2	1M	160M	16	Unified	2	1024	1	64
L3	32M	320M	16	Unified	3	32768	1	64

8. `numactl --hardware`

NOTE: a `numactl 'node'` might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-79,160-239
node 0 size: 386638 MB
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2026_int_base = 505

SPECrate®2026_int_peak = 505

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

Platform Notes (Continued)

```

node 0 free: 384936 MB
node 1 cpus: 80-159,240-319
node 1 size: 386897 MB
node 1 free: 385445 MB
node distances:
node    0    1
  0:   10   12
  1:   12   10

```

```

-----
9. /proc/meminfo
   MemTotal:      792100956 kB

```

```

-----
10. who -r
    run-level 5 Jan 29 02:22

```

```

-----
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)
    Default Target   Status
    graphical        running

```

```

-----
12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
enabled           ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init
                  cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                  grub-common grub-initrd-fallback keyboard-setup lm-sensors lvm2-monitor multipathd
                  networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
                  snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore
                  systemd-resolved thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw
                  unattended-upgrades vgauth
enabled-runtime   netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled          console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
                  systemd-boot-check-no-failures systemd-confext systemd-network-generator
                  systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
                  systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
                  systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
                  systemd-time-wait-sync systemd-timesyncd upower
indirect          systemd-sysupdate systemd-sysupdate-reboot uidd
masked            cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-6.8.0-90-generic
    root=UUID=80ced99f-4de1-4843-9386-fd6dda74fdf5
    ro

```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2026_int_base = 505

SPECrate®2026_int_peak = 505

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

Platform Notes (Continued)

14. cpupower frequency-info

analyzing CPU 34:

current policy: frequency should be within 1.50 GHz and 2.10 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

Boost States: 0

Total States: 3

Pstate-P0: 2100MHz

15. tuned-adm active

Current active profile: balanced

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

17. /sys/kernel/mm/transparent_hugepage

defrag [always] defer defer+madvice madvice never

enabled [always] madvice never

hpage_pmd_size 2097152

shmem_enabled always within_size advise [never] deny force

(Continued on next page)



SPEC

SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2026_int_base = 505

SPECrate®2026_int_peak = 505

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2026
Hardware Availability: Mar-2025
Software Availability: Jan-2026

Platform Notes (Continued)

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs    60000
defrag                    1
max_ptes_none            511
max_ptes_shared          256
max_ptes_swap            64
pages_to_scan            4096
scan_sleep_millisecs    10000
```

19. OS release

```
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS
```

20. Disk information

SPEC is set to: /home/cpu2026

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  439G   34G  383G   9% /
```

21. /sys/devices/virtual/dmi/id

```
Vendor:          HPE
Product:         ProLiant DL325 Gen11
Product Family: ProLiant
Serial:          DL325G11-010
```

22. dmidecode

Additional information from dmidecode 3.5 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
1x Micron MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400
11x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400
```

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      HPE
BIOS Version:     2.90
BIOS Date:        01/09/2026
BIOS Revision:    2.90
Firmware Revision: 1.65
```



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2026_int_base = 505

SPECrate®2026_int_peak = 505

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

Compiler Version Notes

=====
C | 708.sqlite_r(base) 714.cpython_r(base) 777.zstd_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====
C++ | 706.stockfish_r(base) 707.ntest_r(base) 727.cppcheck_r(base)
753.ns3_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====
C++, C | 710.omnetpp_r(base) 721.gcc_r(base) 723.llvm_r(base) 729.abc_r(base)
734.vpr_r(base) 735.gem5_r(base) 750.sealcrypto_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Benchmarks using both C and C++:

clang++ clang

Base Portability Flags

706.stockfish_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2026_int_base = 505

SPECrate®2026_int_peak = 505

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

Base Portability Flags (Continued)

```

707.ntest_r: -DSPEC_LP64
708.sqlite_r: -DSPEC_LP64
710.omnetpp_r: -DSPEC_LP64
714.cpython_r: -DSPEC_LP64
721.gcc_r: -DSPEC_LP64
723.llvm_r: -DSPEC_LP64
727.cppcheck_r: -DSPEC_LP64
729.abc_r: -DSPEC_LP64
734.vpr_r: -DSPEC_LP64
735.gem5_r: -DSPEC_LP64
750.sealcrypto_r: -DSPEC_LP64
753.ns3_r: -DSPEC_LP64
777.zstd_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -O3 -march=znver5 -fveclib=AMDLIBM
-fno-PIE -no-pie -flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc

```

C++ benchmarks:

```

-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc

```

Benchmarks using both C and C++:

```

-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -fno-PIE -no-pie -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -lflang -lamdalloc

```



SPEC CPU[®]2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate[®]2026_int_base = 505

SPECrate[®]2026_int_peak = 505

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

Peak Optimization Flags

C benchmarks:

708.sqlite_r: basepeak = yes

714.cpython_r: basepeak = yes

777.zstd_r: basepeak = yes

C++ benchmarks:

706.stockfish_r: basepeak = yes

707.ntest_r: basepeak = yes

727.cppcheck_r: basepeak = yes

753.ns3_r: basepeak = yes

Benchmarks using both C and C++:

710.omnetpp_r: basepeak = yes

721.gcc_r: basepeak = yes

723.llvm_r: basepeak = yes

729.abc_r: basepeak = yes

734.vpr_r: basepeak = yes

735.gem5_r: basepeak = yes

750.sealcrypto_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.html>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.xml>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.xml>



SPEC CPU[®]2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate[®]2026_int_base = 505

SPECrate[®]2026_int_peak = 505

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU[®]2026 v0.902.0 on 2026-01-28 21:25:56-0500.
Report generated on 2026-05-11 16:38:40 by CPU2026 PDF formatter (unknown).
Originally published on 2026-05-05.