



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL325 Gen11


(2.25 GHz, AMD EPYC 9754)

## SPECrate®2026\_fp\_base = 341

## SPECrate®2026\_fp\_peak = 341

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2026  
**Hardware Availability:** Aug-2023  
**Software Availability:** Jan-2026

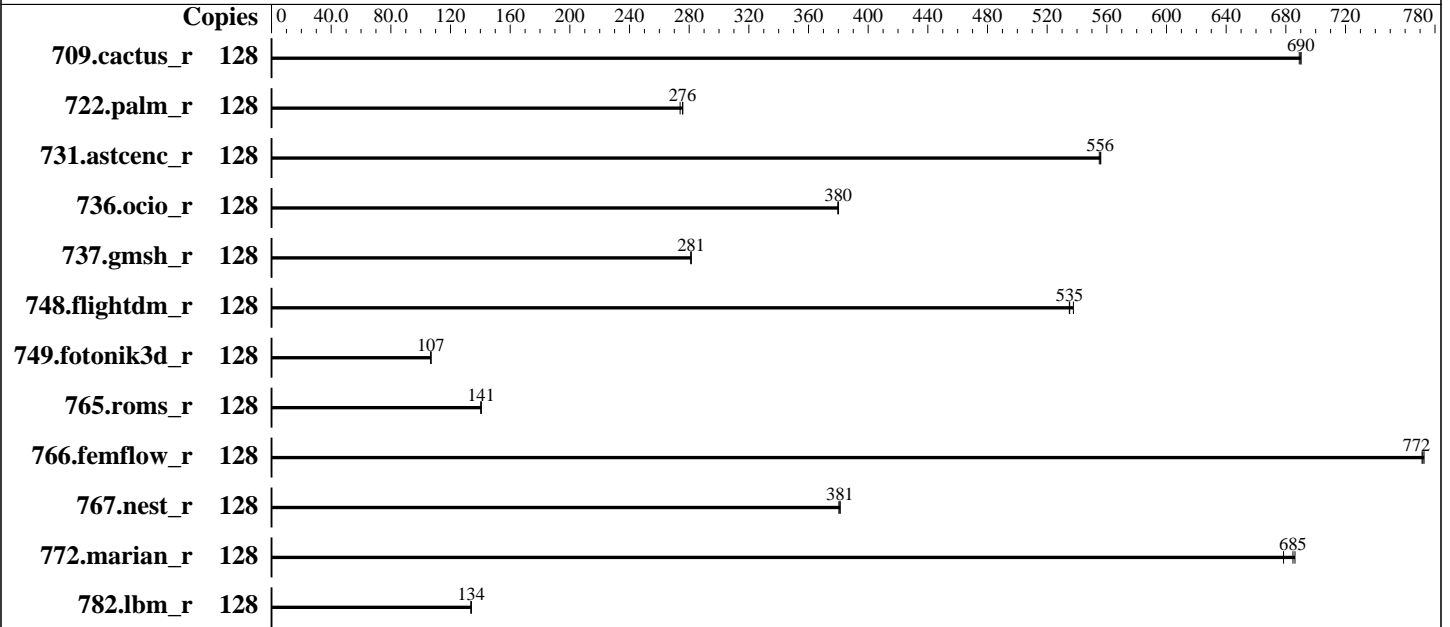

### Hardware

CPU Name: AMD EPYC 9754  
 Max MHz: 3100  
 Nominal: 2250  
 Enabled: 128 cores, 1 chip  
 Orderable: 1 Chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 16 MB shared / 8 cores  
 Other: None  
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 480 GB NVMe SSD  
 Cooling: CLC  
 Other: None

### Software

OS: Ubuntu 24.04.3 LTS  
 Kernel 6.8.0-90-generic  
 Compiler: C/C++/Fortran: Version 5.1.0 of AOCC  
 Compiler Category: Vendor  
 Firmware: HPE BIOS Version v2.90  
 released Jan-2026  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS is set to prefer performance at the cost of additional power usage



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL325 Gen11

(2.25 GHz, AMD EPYC 9754)

## SPECrate®2026\_fp\_base = 341

## SPECrate®2026\_fp\_peak = 341

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2026  
**Hardware Availability:** Aug-2023  
**Software Availability:** Jan-2026

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	128	<b>159</b>	<b>690</b>	159	689	159	690	128	<b>159</b>	<b>690</b>	159	689	159	690
722.palm_r	128	<b>613</b>	<b>276</b>	613	276	617	274	128	<b>613</b>	<b>276</b>	613	276	617	274
731.ascenc_r	128	<b>194</b>	<b>556</b>	194	555	193	556	128	<b>194</b>	<b>556</b>	194	555	193	556
736.ocio_r	128	295	380	<b>295</b>	<b>380</b>	295	380	128	295	380	<b>295</b>	<b>380</b>	295	380
737.gmsh_r	128	209	281	209	281	<b>209</b>	<b>281</b>	128	209	281	209	281	<b>209</b>	<b>281</b>
748.flightdm_r	128	171	535	<b>171</b>	<b>535</b>	170	538	128	171	535	<b>171</b>	<b>535</b>	170	538
749.fotonik3d_r	128	<b>1385</b>	<b>107</b>	1386	107	1385	107	128	<b>1385</b>	<b>107</b>	1386	107	1385	107
765.roms_r	128	1434	141	1437	140	<b>1435</b>	<b>141</b>	128	1434	141	1437	140	<b>1435</b>	<b>141</b>
766.femflow_r	128	<b>243</b>	<b>772</b>	243	771	243	773	128	<b>243</b>	<b>772</b>	243	771	243	773
767.nest_r	128	<b>266</b>	<b>381</b>	266	381	267	380	128	<b>266</b>	<b>381</b>	266	381	267	380
772.marian_r	128	295	686	298	678	<b>295</b>	<b>685</b>	128	295	686	298	678	<b>295</b>	<b>685</b>
782.lbm_r	128	548	134	548	134	<b>548</b>	<b>134</b>	128	548	134	548	134	<b>548</b>	<b>134</b>

SPECrate®2026\_fp\_base = **341**

SPECrate®2026\_fp\_peak = **341**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026\_fp\_base = 341

SPECrate®2026\_fp\_peak = 341

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Aug-2023

**Software Availability:** Jan-2026

## Operating System Notes (Continued)

To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.  
To enable Transparent Hugepages (THP) for all allocations, 'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and 'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/cpu2026/amd_rate_aocc510_znver5_A_lib/lib:/home/cpu2026/amd_rate_  
    aocc510_znver5_A_lib/lib32:"  
MALLOCONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB Memory using Ubuntu 24.04  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configurations : Parameters are selected in the order shown below  
Workload Profile set to General Throughput Compute  
AMD SMT Option set to Disabled  
Determinism Control set to Manual  
Performance Determinism set to Power Deterministic  
Last-Level Cache (LLC) as NUMA Node set to Enabled  
NUMA memory domains per socket set to Four memory domains per socket  
Memory Patrol Scrubbing set to Disabled  
ACPI CST C2 Latency set to 18 microseconds  
Thermal Configuration set to Maximum Cooling  
Data Fabric C-State Enable set to Force Enabled  
Workload Profile set to Custom  
Power Regulator set to OS Control Mode  
L2 HW Prefetcher set to Disabled

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL325 Gen11**

(2.25 GHz, AMD EPYC 9754)

**SPECrate®2026\_fp\_base = 341**

**SPECrate®2026\_fp\_peak = 341**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Aug-2023

**Software Availability:** Jan-2026

## Platform Notes (Continued)

sysinfo program /home/cpu2026/bin/sysinfo  
Rev: 069f95da7e7f5d81b2ce48a82150e54f  
running on admin1 Tue Feb 3 10:48:39 2026

SUT (System Under Test) info as seen by some common utilities.

### ----- Table of contents -----

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----  
1. uname -srvm  
Linux 6.8.0-90-generic #91-Ubuntu SMP PREEMPT\_DYNAMIC Tue Nov 18 14:14:30 UTC 2025 x86\_64  
-----

2. w  
10:48:39 up 9:15, 4 users, load average: 0.08, 0.24, 15.82  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
admin1 172.16.0.100 25Nov25 69days 0.00s 0.09s sshd: admin1 [priv]  
admin1 tty1 - 25Nov25 69days 0.10s 0.03s -bash  
-----

3. Username

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026\_fp\_base = 341

SPECrate®2026\_fp\_peak = 341

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Aug-2023

**Software Availability:** Jan-2026

## Platform Notes (Continued)

From environment variable \$USER: root  
From the command 'logname': admin1

```

-----
4. ulimit -a
time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)      0
memory(kbytes)         unlimited
locked memory(kbytes) 2097152
process                3094437
nofiles                1024
vmemory(kbytes)        unlimited
locks                  unlimited
rtprio                 0

```

```

-----
5. sysinfo process ancestry
/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: admin1 [priv]
sshd: admin1@pts/0
-bash
sudo ./run_fprate_sh.sh
sudo ./run_fprate_sh.sh
/bin/bash ./run_fprate_sh.sh
sudo ./run_fprate.py
sudo ./run_fprate.py
python3 ./run_fprate.py
/bin/bash ./amd_rate_aocc510_znver5_A1.sh
runcpu --config amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026

```

```

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9754 128-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 160
stepping       : 1
microcode      : 0xaa00116

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.25 GHz, AMD EPYC 9754)

**SPECrate®2026\_fp\_base = 341**

**SPECrate®2026\_fp\_peak = 341**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Aug-2023

**Software Availability:** Jan-2026

## Platform Notes (Continued)

```

bugs                : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso vmscape
TLB size           : 3584 4K pages
cpu cores          : 128
siblings           : 128
1 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids
0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
240-247
physical id 0: apicids
0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
240-247

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Vendor ID:              AuthenticAMD
BIOS Vendor ID:        Advanced Micro Devices, Inc.
Model name:             AMD EPYC 9754 128-Core Processor
BIOS Model name:       AMD EPYC 9754 128-Core Processor           CPU @ 2.2GHz
BIOS CPU family:       107
CPU family:             25
Model:                  160
Thread(s) per core:    1
Core(s) per socket:    128
Socket(s):              1
Stepping:               1
Frequency boost:        enabled
CPU(s) scaling MHz:    102%
CPU max MHz:            2250.0000
CPU min MHz:            1500.0000
BogoMIPS:               4493.33

```

```

Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscl lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL325 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026\_fp\_base = 341

SPECrate®2026\_fp\_peak = 341

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Aug-2023

**Software Availability:** Jan-2026

## Platform Notes (Continued)

```

osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
v_omsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
debug_swap ibpb_exit_to_user

```

```

Virtualization: AMD-V
L1d cache: 4 MiB (128 instances)
L1i cache: 4 MiB (128 instances)
L2 cache: 128 MiB (128 instances)
L3 cache: 256 MiB (16 instances)
NUMA node(s): 16
NUMA node0 CPU(s): 0-7
NUMA node1 CPU(s): 8-15
NUMA node2 CPU(s): 16-23
NUMA node3 CPU(s): 24-31
NUMA node4 CPU(s): 32-39
NUMA node5 CPU(s): 40-47
NUMA node6 CPU(s): 48-55
NUMA node7 CPU(s): 56-63
NUMA node8 CPU(s): 64-71
NUMA node9 CPU(s): 72-79
NUMA node10 CPU(s): 80-87
NUMA node11 CPU(s): 88-95
NUMA node12 CPU(s): 96-103
NUMA node13 CPU(s): 104-111
NUMA node14 CPU(s): 112-119
NUMA node15 CPU(s): 120-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; Safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL325 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026\_fp\_base = 341

SPECrate®2026\_fp\_peak = 341

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Aug-2023

Software Availability: Jan-2026

## Platform Notes (Continued)

disabled; RSB filling; PBRBS-eIBRS Not affected; BHI Not affected

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

Vulnerability Vmscape: Mitigation; IBPB before exit to userspace

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	4M	8	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	8	Unified	2	2048	1	64
L3	16M	256M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)

node 0 cpus: 0-7

node 0 size: 48066 MB

node 0 free: 47224 MB

node 1 cpus: 8-15

node 1 size: 48381 MB

node 1 free: 48160 MB

node 2 cpus: 16-23

node 2 size: 48381 MB

node 2 free: 48146 MB

node 3 cpus: 24-31

node 3 size: 48381 MB

node 3 free: 48145 MB

node 4 cpus: 32-39

node 4 size: 48381 MB

node 4 free: 48194 MB

node 5 cpus: 40-47

node 5 size: 48381 MB

node 5 free: 48186 MB

node 6 cpus: 48-55

node 6 size: 48337 MB

node 6 free: 48152 MB

node 7 cpus: 56-63

node 7 size: 48381 MB

node 7 free: 48215 MB

node 8 cpus: 64-71

node 8 size: 48381 MB

node 8 free: 48201 MB

node 9 cpus: 72-79

node 9 size: 48381 MB

node 9 free: 48190 MB

node 10 cpus: 80-87

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026\_fp\_base = 341

SPECrate®2026\_fp\_peak = 341

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Aug-2023

Software Availability: Jan-2026

## Platform Notes (Continued)

```

node 10 size: 48381 MB
node 10 free: 48172 MB
node 11 cpus: 88-95
node 11 size: 48381 MB
node 11 free: 48206 MB
node 12 cpus: 96-103
node 12 size: 48381 MB
node 12 free: 48134 MB
node 13 cpus: 104-111
node 13 size: 48381 MB
node 13 free: 48205 MB
node 14 cpus: 112-119
node 14 size: 48381 MB
node 14 free: 48197 MB
node 15 cpus: 120-127
node 15 size: 48330 MB
node 15 free: 48131 MB

```

node distances:

```

node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0:  10 11 11 11 12 12 12 12 12 12 12 12 12 12 12 12
1:  11 10 11 11 12 12 12 12 12 12 12 12 12 12 12 12
2:  11 11 10 11 12 12 12 12 12 12 12 12 12 12 12 12
3:  11 11 11 10 12 12 12 12 12 12 12 12 12 12 12 12
4:  12 12 12 12 10 11 11 11 12 12 12 12 12 12 12 12
5:  12 12 12 12 11 10 11 11 12 12 12 12 12 12 12 12
6:  12 12 12 12 11 11 10 11 12 12 12 12 12 12 12 12
7:  12 12 12 12 11 11 11 10 12 12 12 12 12 12 12 12
8:  12 12 12 12 12 12 12 12 10 11 11 11 12 12 12 12
9:  12 12 12 12 12 12 12 12 12 11 10 11 11 12 12 12
10: 12 12 12 12 12 12 12 12 12 11 11 10 11 12 12 12
11: 12 12 12 12 12 12 12 12 12 11 11 11 10 12 12 12
12: 12 12 12 12 12 12 12 12 12 12 12 12 10 11 11 11
13: 12 12 12 12 12 12 12 12 12 12 12 12 11 10 11 11
14: 12 12 12 12 12 12 12 12 12 12 12 12 11 11 10 11
15: 12 12 12 12 12 12 12 12 12 12 12 12 11 11 11 10

```

```

9. /proc/meminfo
MemTotal:          792257720 kB

```

```

10. who -r
run-level 5 Nov 25 18:16

```

```

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)
Default Target Status

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.25 GHz, AMD EPYC 9754)

**SPECrate®2026\_fp\_base = 341**

**SPECrate®2026\_fp\_peak = 341**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Aug-2023

**Software Availability:** Jan-2026

## Platform Notes (Continued)

graphical            running

-----  
12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell iscsid nftables rsync serial-getty@ ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysextr systemd-time-wait-sync systemd-timesyncd upower
indirect	systemd-sysupdate systemd-sysupdate-reboot uidd
masked	cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=/boot/vmlinuz-6.8.0-90-generic  
root=UUID=c8895b10-3344-47fb-81a4-2b6fb85bbd20  
ro

-----  
14. cpupower frequency-info

analyzing CPU 48:  
current policy: frequency should be within 1.50 GHz and 2.25 GHz.  
The governor "performance" may decide which speed to use within this range.  
  
boost state support:  
Supported: yes  
Active: yes  
Boost States: 0  
Total States: 3  
Pstate-P0: 2250MHz

-----  
15. tuned-adm active

Current active profile: balanced

-----  
16. sysctl

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026\_fp\_base = 341

SPECrate®2026\_fp\_peak = 341

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Aug-2023

**Software Availability:** Jan-2026

## Platform Notes (Continued)

```

kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                    1
vm.watermark_boost_factor       15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode            1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS

```

```

-----
20. Disk information
SPEC is set to: /home/cpu2026
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p2 ext4  438G  93G  324G  23% /

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.25 GHz, AMD EPYC 9754)

**SPECrate®2026\_fp\_base = 341**

**SPECrate®2026\_fp\_peak = 341**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Aug-2023

**Software Availability:** Jan-2026

## Platform Notes (Continued)

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:           HPE
Product:          ProLiant DL325 Gen11
Product Family:  ProLiant
Serial:           DL325G11-008

```

### 22. dmidecode

Additional information from dmidecode 3.5 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```

3x Hynix HMCG94AEBRA103N 64 GB 2 rank 4800
1x Hynix HMCG94AEBRA123N 64 GB 2 rank 4800
8x Hynix HMCG94MEBRA121N 64 GB 2 rank 4800

```

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```

BIOS Vendor:      HPE
BIOS Version:     2.90
BIOS Date:        01/09/2026
BIOS Revision:    2.90
Firmware Revision: 1.70

```

## Compiler Version Notes

```

=====
C      | 782.lbm_r(base)
-----

```

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

```

=====
C++    | 731.astcenc_r(base) 736.ocio_r(base) 748.flightdm_r(base)
      | 766.femflow_r(base) 767.nest_r(base) 772.marian_r(base)
-----

```

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)

Target: x86\_64-unknown-linux-gnu

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026\_fp\_base = 341

SPECrate®2026\_fp\_peak = 341

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Aug-2023

**Software Availability:** Jan-2026

## Compiler Version Notes (Continued)

Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====  
C++, C | 709.cactus\_r(base) 737.gmsh\_r(base)

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====  
Fortran | 722.palm\_r(base) 749.fotonik3d\_r(base) 765.roms\_r(base)

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both C and C++:

clang++ clang

## Base Portability Flags

709.cactus\_r: -DSPEC\_LP64  
722.palm\_r: -DSPEC\_LP64  
731.ascenc\_r: -DSPEC\_LP64  
736.ocio\_r: -fno-finite-math-only -DSPEC\_LP64  
737.gmsh\_r: -fno-fast-math -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026\_fp\_base = 341

SPECrate®2026\_fp\_peak = 341

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Aug-2023

**Software Availability:** Jan-2026

## Base Portability Flags (Continued)

748.flightdm\_r: -fno-reciprocal-math -DSPEC\_LP64

749.fotonik3d\_r: -DSPEC\_LP64

765.roms\_r: -DSPEC\_LP64

766.femflow\_r: -DSPEC\_LP64

767.nest\_r: -fno-finite-math-only -DSPEC\_LP64

772.marian\_r: -DSPEC\_LP64

782.lbm\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

C++ benchmarks:

```
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -Mstandard -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -ffast-math -O3
-march=znver5 -fveclib=AMDLIBM -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026\_fp\_base = 341

SPECrate®2026\_fp\_peak = 341

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Aug-2023

**Software Availability:** Jan-2026

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

## Peak Optimization Flags

C benchmarks:

782.lbm\_r: basepeak = yes

C++ benchmarks:

731.ascenc\_r: basepeak = yes

736.ocio\_r: basepeak = yes

748.flightdm\_r: basepeak = yes

766.femflow\_r: basepeak = yes

767.nest\_r: basepeak = yes

772.marian\_r: basepeak = yes

Fortran benchmarks:

722.palm\_r: basepeak = yes

749.fotonik3d\_r: basepeak = yes

765.roms\_r: basepeak = yes

Benchmarks using both C and C++:

709.cactus\_r: basepeak = yes

737.gmsh\_r: basepeak = yes



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.25 GHz, AMD EPYC 9754)

**SPECrate®2026\_fp\_base = 341**

**SPECrate®2026\_fp\_peak = 341**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Aug-2023

**Software Availability:** Jan-2026

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.html>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.xml>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-03 05:48:38-0500.

Report generated on 2026-05-11 16:38:17 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.