



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL325 Gen11

(2.40 GHz, AMD EPYC 9654P)

SPECrate®2026\_int\_base = 339

SPECrate®2026\_int\_peak = 339

CPU2026 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Aug-2023

Software Availability: Jan-2026

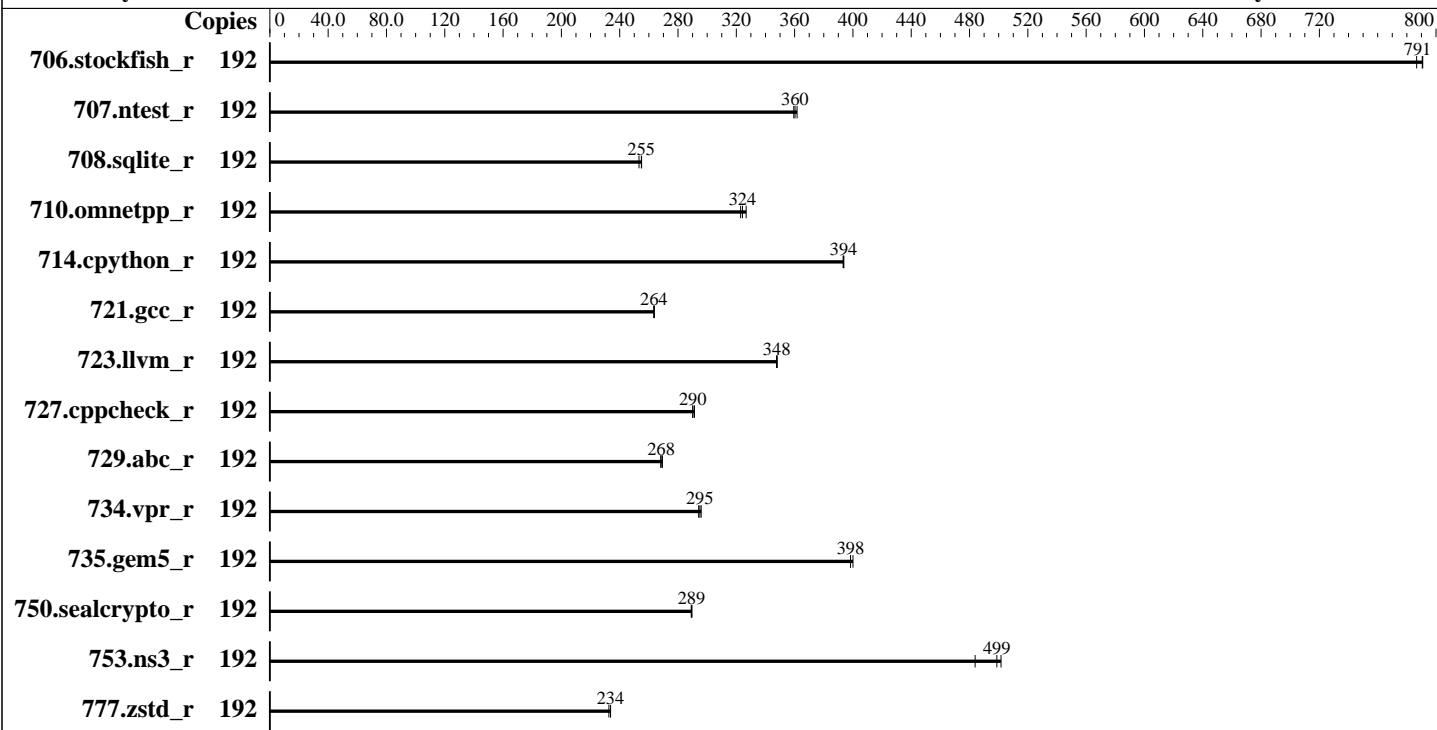

### Hardware

CPU Name: AMD EPYC 9654P  
 Max MHz: 3700  
 Nominal: 2400  
 Enabled: 96 cores, 1 chip, 2 threads/core  
 Orderable: 1 Chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 384 MB I+D on chip per chip,  
 32 MB shared / 8 cores  
 Other: None  
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 480 GB NVMe SSD  
 Cooling: CLC  
 Other: None

### Software

OS: Ubuntu 24.04.3 LTS  
 Kernel 6.8.0-90-generic  
 Compiler: C/C++/Fortran: Version 5.1.0 of AOCC  
 Compiler Category: Vendor  
 Firmware: HPE BIOS Version v2.90  
 released Jan-2026  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS is set to prefer performance at the cost of additional power usage



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.40 GHz, AMD EPYC 9654P)

SPECrate®2026\_int\_base = 339

SPECrate®2026\_int\_peak = 339

CPU2026 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Jan-2026  
Hardware Availability: Aug-2023  
Software Availability: Jan-2026

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
706.stockfish_r	192	306	791	<b>306</b>	<b>791</b>	308	787	192	306	791	<b>306</b>	<b>791</b>	308	787
707.ntest_r	192	314	362	316	359	<b>315</b>	<b>360</b>	192	314	362	316	359	<b>315</b>	<b>360</b>
708.sqlite_r	192	400	253	398	255	<b>398</b>	<b>255</b>	192	400	253	398	255	<b>398</b>	<b>255</b>
710.omnetpp_r	192	289	323	286	327	<b>288</b>	<b>324</b>	192	289	323	286	327	<b>288</b>	<b>324</b>
714.cpython_r	192	<b>234</b>	<b>394</b>	234	394	234	393	192	<b>234</b>	<b>394</b>	234	394	234	393
721.gcc_r	192	500	263	499	264	<b>500</b>	<b>264</b>	192	500	263	499	264	<b>500</b>	<b>264</b>
723.llvm_r	192	<b>280</b>	<b>348</b>	280	348	280	348	192	<b>280</b>	<b>348</b>	280	348	280	348
727.cppcheck_r	192	237	291	<b>238</b>	<b>290</b>	238	290	192	237	291	<b>238</b>	<b>290</b>	238	290
729.abc_r	192	329	268	327	269	<b>328</b>	<b>268</b>	192	329	268	327	269	<b>328</b>	<b>268</b>
734.vpr_r	192	<b>300</b>	<b>295</b>	301	294	299	296	192	<b>300</b>	<b>295</b>	301	294	299	296
735.gem5_r	192	235	398	<b>235</b>	<b>398</b>	234	400	192	235	398	<b>235</b>	<b>398</b>	234	400
750.sealcrypto_r	192	356	289	<b>356</b>	<b>289</b>	355	290	192	356	289	<b>356</b>	<b>289</b>	355	290
753.ns3_r	192	243	484	<b>236</b>	<b>499</b>	235	502	192	243	484	<b>236</b>	<b>499</b>	235	502
777.zstd_r	192	532	233	<b>529</b>	<b>234</b>	529	234	192	532	233	<b>529</b>	<b>234</b>	529	234

SPECrate®2026\_int\_base = 339

SPECrate®2026\_int\_peak = 339

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.40 GHz, AMD EPYC 9654P)

SPECrate®2026\_int\_base = 339

SPECrate®2026\_int\_peak = 339

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2026

**Hardware Availability:** Aug-2023

**Software Availability:** Jan-2026

## Operating System Notes (Continued)

To free node-local memory and avoid remote memory usage,  
 'sysctl -w vm.zone\_reclaim\_mode=1' run as root.

To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.

To disable address space layout randomization (ASLR) to reduce run-to-run  
 variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
 'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
 'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/cpu2026/amd_rate_aocc510_znver5_A_lib/lib:/home/cpu2026/amd_rate_
  aocc510_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB  
 Memory using Ubuntu 24.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
 is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
 is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
 is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Throughput Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Last-Level Cache (LLC) as NUMA Node set to Enabled

NUMA memory domains per socket set to Four memory domains per socket

ACPI CST C2 Latency set to 18 microseconds

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

```
Sysinfo program /home/cpu2026/bin/sysinfo
Rev: 069f95da7e7f5d81b2ce48a82150e54f
running on admin1 Thu Jan 29 02:13:50 2026
```

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.40 GHz, AMD EPYC 9654P)

SPECrate®2026\_int\_base = 339

SPECrate®2026\_int\_peak = 339

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2026  
**Hardware Availability:** Aug-2023  
**Software Availability:** Jan-2026

## Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----  
1. uname -srvm  
Linux 6.8.0-90-generic #91-Ubuntu SMP PREEMPT\_DYNAMIC Tue Nov 18 14:14:30 UTC 2025 x86\_64  
-----

2. w  
02:13:50 up 4 min, 5 users, load average: 0.29, 0.09, 0.02  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
admin1 172.16.0.111 02:13 3:54 0.00s ? sshd: admin1 [priv]  
admin1 172.16.0.111 02:13 3:54 0.00s ? sshd: admin1 [priv]  
admin1 172.16.0.111 02:13 3:54 0.00s ? sshd: admin1 [priv]  
admin1 172.16.0.111 02:13 3:54 0.00s ? sshd: admin1 [priv]  
admin1 172.16.0.100 02:10 3:54 0.00s ? sshd: admin1 [priv]

-----  
3. Username

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.40 GHz, AMD EPYC 9654P)

SPECrate®2026\_int\_base = 339

SPECrate®2026\_int\_peak = 339

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Aug-2023

Software Availability: Jan-2026

## Platform Notes (Continued)

From environment variable \$USER: root  
From the command 'logname': admin1

```

4. ulimit -a
time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)      0
memory(kbytes)         unlimited
locked memory(kbytes) 2097152
process                3094364
nofiles                1024
vmemory(kbytes)       unlimited
locks                  unlimited
rtprio                 0

```

```

5. sysinfo process ancestry
/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: admin1 [priv]
sshd: admin1@notty
/bin/bash $SPEC/run_intrrate_sh.sh
sudo ./run_intrrate.py
python3 ./run_intrrate.py
/bin/bash ./amd_rate_aocc510_znver5_A1.sh
runcpu --config amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026

```

```

6. /proc/cpuinfo
model name      : AMD EPYC 9654P 96-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa101158
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso vmscape
TLB size      : 3584 4K pages
cpu cores      : 96
siblings       : 192

```

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.40 GHz, AMD EPYC 9654P)

**SPECrate®2026\_int\_base = 339**

**SPECrate®2026\_int\_peak = 339**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2026

**Hardware Availability:** Aug-2023

**Software Availability:** Jan-2026

## Platform Notes (Continued)

1 physical ids (chips)  
192 processors (hardware threads)  
physical id 0: core ids 0-95  
physical id 0: apicids 0-191

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                       192
On-line CPU(s) list:         0-191
Vendor ID:                    AuthenticAMD
BIOS Vendor ID:              Advanced Micro Devices, Inc.
Model name:                   AMD EPYC 9654P 96-Core Processor
BIOS Model name:             AMD EPYC 9654P 96-Core Processor      CPU @ 2.4GHz
BIOS CPU family:             107
CPU family:                   25
Model:                        17
Thread(s) per core:          2
Core(s) per socket:          96
Socket(s):                    1
Stepping:                     1
BogoMIPS:                     4792.82

```

```

Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_1ld

```

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.40 GHz, AMD EPYC 9654P)

SPECrate®2026\_int\_base = 339

SPECrate®2026\_int\_peak = 339

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2026  
**Hardware Availability:** Aug-2023  
**Software Availability:** Jan-2026

## Platform Notes (Continued)

```

Virtualization:                debug_swap ibpb_exit_to_user
                                AMD-V
L1d cache:                     3 MiB (96 instances)
L1i cache:                     3 MiB (96 instances)
L2 cache:                      96 MiB (96 instances)
L3 cache:                      384 MiB (12 instances)
NUMA node(s):                 12
NUMA node0 CPU(s):            0-7,96-103
NUMA node1 CPU(s):            8-15,104-111
NUMA node2 CPU(s):            16-23,112-119
NUMA node3 CPU(s):            24-31,120-127
NUMA node4 CPU(s):            32-39,128-135
NUMA node5 CPU(s):            40-47,136-143
NUMA node6 CPU(s):            48-55,144-151
NUMA node7 CPU(s):            56-63,152-159
NUMA node8 CPU(s):            64-71,160-167
NUMA node9 CPU(s):            72-79,168-175
NUMA node10 CPU(s):           80-87,176-183
NUMA node11 CPU(s):           88-95,184-191
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:    Not affected
Vulnerability L1tf:            Not affected
Vulnerability Mds:             Not affected
Vulnerability Meltdown:        Not affected
Vulnerability Mmio stale data:  Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:        Not affected
Vulnerability Spec rstack overflow: Mitigation; Safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:       Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:       Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:           Not affected
Vulnerability Tsx async abort:  Not affected
Vulnerability Vmscape:         Mitigation; IBPB before exit to userspace

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	3M	8	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	1M	96M	8	Unified	2	2048	1	64
L3	32M	384M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.  
available: 12 nodes (0-11)

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL325 Gen11**

(2.40 GHz, AMD EPYC 9654P)

**SPECrate®2026\_int\_base = 339**

**SPECrate®2026\_int\_peak = 339**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2026

**Hardware Availability:** Aug-2023

**Software Availability:** Jan-2026

## Platform Notes (Continued)

```

node 0 cpus: 0-7,96-103
node 0 size: 64148 MB
node 0 free: 63485 MB
node 1 cpus: 8-15,104-111
node 1 size: 64506 MB
node 1 free: 64257 MB
node 2 cpus: 16-23,112-119
node 2 size: 64506 MB
node 2 free: 64285 MB
node 3 cpus: 24-31,120-127
node 3 size: 64506 MB
node 3 free: 64131 MB
node 4 cpus: 32-39,128-135
node 4 size: 64506 MB
node 4 free: 64313 MB
node 5 cpus: 40-47,136-143
node 5 size: 64506 MB
node 5 free: 64317 MB
node 6 cpus: 48-55,144-151
node 6 size: 64506 MB
node 6 free: 64285 MB
node 7 cpus: 56-63,152-159
node 7 size: 64506 MB
node 7 free: 64236 MB
node 8 cpus: 64-71,160-167
node 8 size: 64506 MB
node 8 free: 64266 MB
node 9 cpus: 72-79,168-175
node 9 size: 64506 MB
node 9 free: 64276 MB
node 10 cpus: 80-87,176-183
node 10 size: 64506 MB
node 10 free: 64283 MB
node 11 cpus: 88-95,184-191
node 11 size: 64458 MB
node 11 free: 64188 MB

```

node distances:

```

node  0  1  2  3  4  5  6  7  8  9 10 11
  0:  10 11 11 12 12 12 12 12 12 12 12 12
  1:  11 10 11 12 12 12 12 12 12 12 12 12
  2:  11 11 10 12 12 12 12 12 12 12 12 12
  3:  12 12 12 10 11 11 12 12 12 12 12 12
  4:  12 12 12 11 10 11 12 12 12 12 12 12
  5:  12 12 12 11 11 10 12 12 12 12 12 12
  6:  12 12 12 12 12 12 10 11 11 12 12 12
  7:  12 12 12 12 12 12 11 10 11 12 12 12
  8:  12 12 12 12 12 12 11 11 10 12 12 12

```

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.40 GHz, AMD EPYC 9654P)

SPECrate®2026\_int\_base = 339

SPECrate®2026\_int\_peak = 339

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2026  
**Hardware Availability:** Aug-2023  
**Software Availability:** Jan-2026

## Platform Notes (Continued)

9:	12	12	12	12	12	12	12	12	12	10	11	11
10:	12	12	12	12	12	12	12	12	12	11	10	11
11:	12	12	12	12	12	12	12	12	12	11	11	10

-----

```
9. /proc/meminfo
   MemTotal:          792239088 kB
```

-----

```
10. who -r
    run-level 5 Jan 29 02:10
```

-----

```
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)
    Default Target   Status
    graphical        running
```

-----

```
12. Services, from systemctl list-unit-files
    STATE                               UNIT FILES
    enabled                               ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init
    cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
    grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd
    networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
    snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore
    systemd-resolved thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw
    unattended-upgrades vgauth
    enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
    disabled          console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
    systemd-boot-check-no-failures systemd-confext systemd-network-generator
    systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
    systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
    systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
    systemd-time-wait-sync systemd-timesyncd upower
    indirect          systemd-sysupdate systemd-sysupdate-reboot uidd
    masked            cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common
```

-----

```
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-6.8.0-90-generic
    root=UUID=c8895b10-3344-47fb-81a4-2b6fb85bbd20
    ro
```

-----

```
14. cpupower frequency-info
    analyzing CPU 115:
    Unable to determine current policy
```

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.40 GHz, AMD EPYC 9654P)

SPECrate®2026\_int\_base = 339

SPECrate®2026\_int\_peak = 339

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Aug-2023

Software Availability: Jan-2026

## Platform Notes (Continued)

boost state support:

Supported: yes

Active: yes

Boost States: 0

Total States: 3

Pstate-P0: 2400MHz

-----  
15. tuned-adm active

Current active profile: balanced

-----  
16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

-----  
17. /sys/kernel/mm/transparent\_hugepage

defrag	[always] defer defer+madvise madvise never
enabled	[always] madvise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.40 GHz, AMD EPYC 9654P)

SPECrate®2026\_int\_base = 339

SPECrate®2026\_int\_peak = 339

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Aug-2023

Software Availability: Jan-2026

## Platform Notes (Continued)

pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

### 19. OS release

From /etc/\*-release /etc/\*-version  
os-release Ubuntu 24.04.3 LTS

### 20. Disk information

SPEC is set to: /home/cpu2026

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p2	ext4	438G	92G	324G	23%	/

### 21. /sys/devices/virtual/dmi/id

Vendor: HPE  
Product: ProLiant DL325 Gen11  
Product Family: ProLiant  
Serial: DL325G11-008

### 22. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

3x Hynix HMCG94AEBRA103N 64 GB 2 rank 4800  
1x Hynix HMCG94AEBRA123N 64 GB 2 rank 4800  
8x Hynix HMCG94MEBRA121N 64 GB 2 rank 4800

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE  
BIOS Version: 2.90  
BIOS Date: 01/09/2026  
BIOS Revision: 2.90  
Firmware Revision: 1.70

## Compiler Version Notes

C | 708.sqlite\_r(base) 714.cpython\_r(base) 777.zstd\_r(base)

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.40 GHz, AMD EPYC 9654P)

SPECrate®2026\_int\_base = 339

SPECrate®2026\_int\_peak = 339

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Aug-2023

Software Availability: Jan-2026

## Compiler Version Notes (Continued)

```

-----
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
-----

```

```

=====
C++      | 706.stockfish_r(base) 707.ntest_r(base) 727.cppcheck_r(base)
         | 753.ns3_r(base)
-----

```

```

-----
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
-----

```

```

=====
C++, C  | 710.omnetpp_r(base) 721.gcc_r(base) 723.llvm_r(base) 729.abc_r(base)
         | 734.vpr_r(base) 735.gem5_r(base) 750.sealcrypto_r(base)
-----

```

```

-----
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
-----

```

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Benchmarks using both C and C++:

clang++ clang

## Base Portability Flags

706.stockfish\_r: -DSPEC\_LP64

707.ntest\_r: -DSPEC\_LP64

708.sqlite\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.40 GHz, AMD EPYC 9654P)

**SPECrate®2026\_int\_base = 339**

**SPECrate®2026\_int\_peak = 339**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2026

**Hardware Availability:** Aug-2023

**Software Availability:** Jan-2026

## Base Portability Flags (Continued)

```

710.omnetpp_r: -DSPEC_LP64
714.cpython_r: -DSPEC_LP64
721.gcc_r: -DSPEC_LP64
723.llvm_r: -DSPEC_LP64
727.cppcheck_r: -DSPEC_LP64
729.abc_r: -DSPEC_LP64
734.vpr_r: -DSPEC_LP64
735.gem5_r: -DSPEC_LP64
750.sealcrypto_r: -DSPEC_LP64
753.ns3_r: -DSPEC_LP64
777.zstd_r: -DSPEC_LP64

```

## Base Optimization Flags

### C benchmarks:

```

-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -O3 -march=znver5 -fveclib=AMDLIBM
-fno-PIE -no-pie -flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc

```

### C++ benchmarks:

```

-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc

```

### Benchmarks using both C and C++:

```

-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -fno-PIE -no-pie -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -lflang -lamdalloc

```



# SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.40 GHz, AMD EPYC 9654P)

SPECrate®2026\_int\_base = 339

SPECrate®2026\_int\_peak = 339

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2026

**Hardware Availability:** Aug-2023

**Software Availability:** Jan-2026

## Peak Optimization Flags

C benchmarks:

708.sqlite\_r: basepeak = yes

714.cpython\_r: basepeak = yes

777.zstd\_r: basepeak = yes

C++ benchmarks:

706.stockfish\_r: basepeak = yes

707.ntest\_r: basepeak = yes

727.cppcheck\_r: basepeak = yes

753.ns3\_r: basepeak = yes

Benchmarks using both C and C++:

710.omnetpp\_r: basepeak = yes

721.gcc\_r: basepeak = yes

723.llvm\_r: basepeak = yes

729.abc\_r: basepeak = yes

734.vpr\_r: basepeak = yes

735.gem5\_r: basepeak = yes

750.sealcrypto\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.html>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.xml>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.xml>



# SPEC CPU<sup>®</sup>2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.40 GHz, AMD EPYC 9654P)

SPECrate<sup>®</sup>2026\_int\_base = 339

SPECrate<sup>®</sup>2026\_int\_peak = 339

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2026

**Hardware Availability:** Aug-2023

**Software Availability:** Jan-2026

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU<sup>®</sup>2026 v0.902.0 on 2026-01-28 21:13:50-0500.  
Report generated on 2026-05-11 16:37:50 by CPU2026 PDF formatter (unknown).  
Originally published on 2026-05-05.