



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_int\_base = 7.59

SPECspeed®2026\_int\_peak = 7.59

CPU2026 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

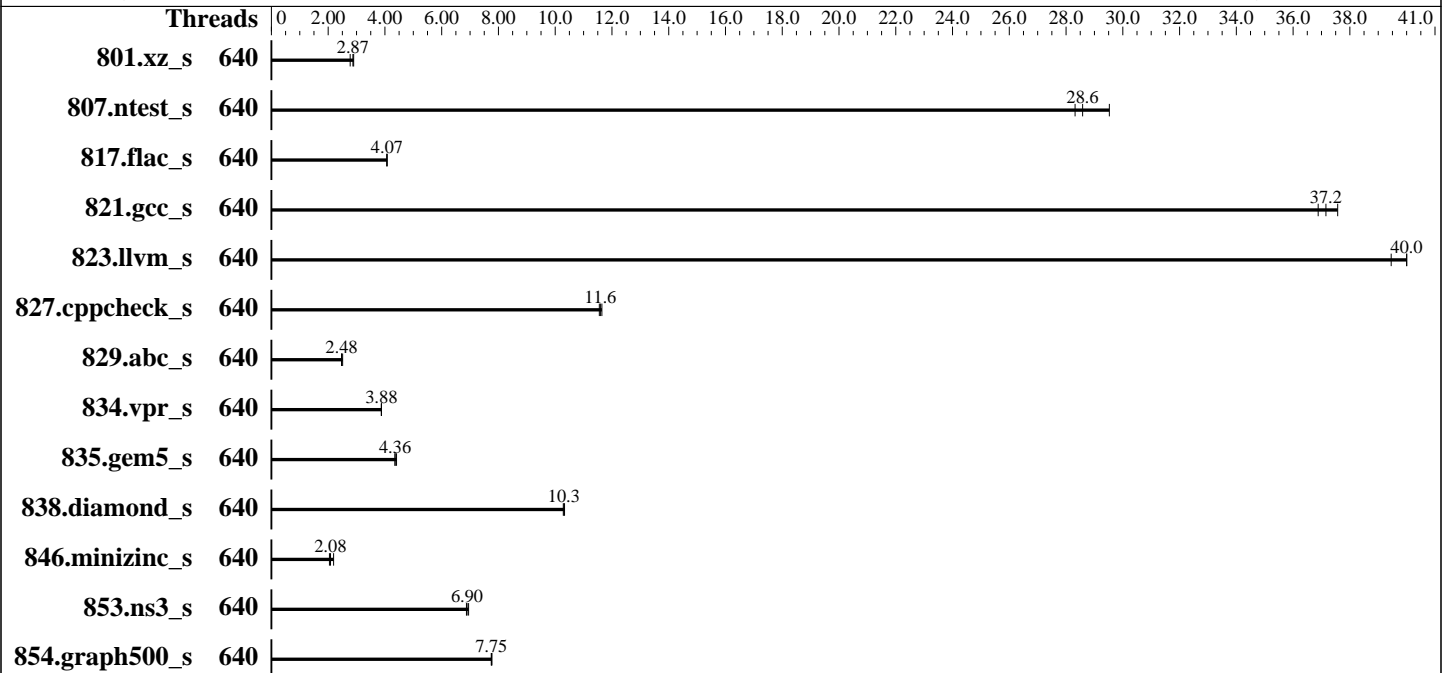

### Hardware

CPU Name: AMD EPYC 9845  
 Max MHz: 3700  
 Nominal: 2100  
 Enabled: 320 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 320 MB I+D on chip per chip,  
 32 MB shared / 16 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)  
 Storage: 1 x 1.6 TB NVMe SSD  
 Cooling: Air  
 Other: None

### Software

OS: Ubuntu 24.04.3 LTS  
 Kernel 6.8.0-90-generic  
 Compiler: C/C++: Version 5.1.0 of AOCC  
 Fortran: Flang v22  
 Compiler Category: Vendor  
 Firmware: HPE BIOS Version v2.90  
 released Jan-2026  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS is set to prefer performance at the cost of additional power usage



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_int\_base = 7.59

SPECspeed®2026\_int\_peak = 7.59

CPU2026 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Feb-2026  
Hardware Availability: Mar-2025  
Software Availability: Jan-2026

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
801.xz_s	640	204	2.90	213	2.78	<b>206</b>	<b>2.87</b>	640	204	2.90	213	2.78	<b>206</b>	<b>2.87</b>
807.nctest_s	640	38.6	29.5	<b>39.9</b>	<b>28.6</b>	40.3	28.3	640	38.6	29.5	<b>39.9</b>	<b>28.6</b>	40.3	28.3
817.flac_s	640	<b>426</b>	<b>4.07</b>	426	4.07	427	4.07	640	<b>426</b>	<b>4.07</b>	426	4.07	427	4.07
821.gcc_s	640	55.1	37.6	<b>55.7</b>	<b>37.2</b>	56.1	36.9	640	55.1	37.6	<b>55.7</b>	<b>37.2</b>	56.1	36.9
823.llvm_s	640	35.3	40.0	<b>35.3</b>	<b>40.0</b>	35.8	39.5	640	35.3	40.0	<b>35.3</b>	<b>40.0</b>	35.8	39.5
827.cppcheck_s	640	<b>96.5</b>	<b>11.6</b>	96.1	11.6	96.8	11.6	640	<b>96.5</b>	<b>11.6</b>	96.1	11.6	96.8	11.6
829.abc_s	640	336	2.47	331	2.51	<b>336</b>	<b>2.48</b>	640	336	2.47	331	2.51	<b>336</b>	<b>2.48</b>
834.vpr_s	640	246	3.88	246	3.87	<b>246</b>	<b>3.88</b>	640	246	3.88	246	3.87	<b>246</b>	<b>3.88</b>
835.gem5_s	640	258	4.41	<b>261</b>	<b>4.36</b>	262	4.35	640	258	4.41	<b>261</b>	<b>4.36</b>	262	4.35
838.diamond_s	640	96.9	10.3	<b>97.1</b>	<b>10.3</b>	97.3	10.3	640	96.9	10.3	<b>97.1</b>	<b>10.3</b>	97.3	10.3
846.minizinc_s	640	328	2.04	<b>322</b>	<b>2.08</b>	306	2.19	640	328	2.04	<b>322</b>	<b>2.08</b>	306	2.19
853.ns3_s	640	<b>167</b>	<b>6.90</b>	166	6.95	168	6.87	640	<b>167</b>	<b>6.90</b>	166	6.95	168	6.87
854.graph500_s	640	<b>78.8</b>	<b>7.75</b>	78.6	7.77	78.9	7.75	640	<b>78.8</b>	<b>7.75</b>	78.6	7.77	78.9	7.75

SPECspeed®2026\_int\_base = 7.59

SPECspeed®2026\_int\_peak = 7.59

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>  
Flang v22 is available at  
<https://flang.llvm.org/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_int\_base = 7.59

SPECspeed®2026\_int\_peak = 7.59

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Operating System Notes (Continued)

```
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-639"
LD_LIBRARY_PATH =
"/home/cpu2026/amd_speed_aocc510_flang22_znver5_A_lib/lib:/home/cpu2026/
amd_speed_aocc510_flang22_znver5_A_lib/lib32:"
MALLOCCONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with an AMD EPYC 9754 CPU + 768 GiB Memory using Ubuntu 24.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Peak Frequency Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

Last-Level Cache (LLC) as NUMA Node set to Enabled

ACPI CST C2 Latency set to 18 microseconds

Thermal Configuration set to Maximum Cooling

NUMA memory domains per socket set to Two memory domains per socket

Workload Profile set to Custom

Power Regulator set to OS Control Mode

Sysinfo program /home/cpu2026/bin/sysinfo

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

(2.10 GHz, AMD EPYC 9845)

**SPECspeed®2026\_int\_base = 7.59**

**SPECspeed®2026\_int\_peak = 7.59**

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

Rev: 069f95da7e7f5d81b2ce48a82150e54f  
running on admin1 Sun Feb 8 20:35:53 2026

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -srvm
Linux 6.8.0-90-generic #91-Ubuntu SMP PREEMPT_DYNAMIC Tue Nov 18 14:14:30 UTC 2025 x86_64
```

```
2. w
20:35:53 up 8 min, 2 users, load average: 0.07, 0.02, 0.00
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
admin1    tty1     172.16.0.100  20:35      2:50        0.00s     0.02s     sshd: admin1 [priv]
admin1    tty1     -             20:29      1:53        0.05s     0.02s     sudo su
```

```
3. Username
From environment variable $USER: root
```

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_int\_base = 7.59

SPECspeed®2026\_int\_peak = 7.59

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

From the command 'logname': admin1

```

4. ulimit -a
time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)      0
memory(kbytes)         unlimited
locked memory(kbytes) 2097152
process                6189296
nofiles                1024
vmemory(kbytes)        unlimited
locks                  unlimited
rtprio                 0

```

```

5. sysinfo process ancestry
/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: admin1 [priv]
sshd: admin1@pts/1
-bash
sudo su
sudo su
su
bash
python3 ./run_amd_speed_aocc510_flang22_znver5_A1.py
/bin/bash ./amd_speed_aocc510_flang22_znver5_A1.sh
runcpu --config amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 3 intspeerd
runcpu --configfile amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 3
--nopower --runmode speed --tune base --size test:train:refspeed intspeerd --nopreenv --note-preenv
--logfile $SPEC/tmp/CPU2026.001/templogs/preenv.intspeerd.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026

```

```

6. /proc/cpuinfo
model name      : AMD EPYC 9845 160-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 17
stepping       : 0
microcode      : 0xb101054
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages

```

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_int\_base = 7.59

SPECspeed®2026\_int\_peak = 7.59

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

## Platform Notes (Continued)

```

cpu cores      : 160
siblings      : 320
2 physical ids (chips)
640 processors (hardware threads)
physical id 0: core ids 0-159
physical id 1: core ids 0-159
physical id 0: apicids 0-319
physical id 1: apicids 512-831

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                       640
On-line CPU(s) list:         0-639
Vendor ID:                    AuthenticAMD
BIOS Vendor ID:              Advanced Micro Devices, Inc.
Model name:                   AMD EPYC 9845 160-Core Processor
BIOS Model name:              AMD EPYC 9845 160-Core Processor          CPU @ 2.1GHz
BIOS CPU family:              107
CPU family:                   26
Model:                        17
Thread(s) per core:          2
Core(s) per socket:          160
Socket(s):                    2
Stepping:                     0
Frequency boost:              enabled
CPU(s) scaling MHz:          101%
CPU max MHz:                  2100.0000
CPU min MHz:                  1500.0000
BogoMIPS:                     4193.83

```

```

Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap

```

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_int\_base = 7.59

SPECspeed®2026\_int\_peak = 7.59

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2026  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jan-2026

## Platform Notes (Continued)

avx512ifma clflushopt clwb avx512cd sha\_ni avx512bw avx512vl xsaveopt  
xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total  
cqm\_mbm\_local user\_shstk avx\_vnni avx512\_bf16 clzero irperf  
xsaveerptr rdpru wbnoinvd amd\_ppin cppc amd\_ibpb\_ret arat npt lbrv  
svm\_lock nrrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists  
pausefilter pfthreshold avic v\_vmsave\_vmload vgif x2avic v\_spec\_ctrl  
vnni avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq  
avx512\_vnni avx512\_bitalg avx512\_vpopcntdq la57 rdpid bus\_lock\_detect  
movdiri movdir64b overflow\_recov succor smca fsmr avx512\_vp2intersect  
flush\_llid debug\_swap

Virtualization: AMD-V  
L1d cache: 15 MiB (320 instances)  
L1i cache: 10 MiB (320 instances)  
L2 cache: 320 MiB (320 instances)  
L3 cache: 640 MiB (20 instances)  
NUMA node(s): 20  
NUMA node0 CPU(s): 0-15,320-335  
NUMA node1 CPU(s): 16-31,336-351  
NUMA node2 CPU(s): 32-47,352-367  
NUMA node3 CPU(s): 48-63,368-383  
NUMA node4 CPU(s): 64-79,384-399  
NUMA node5 CPU(s): 80-95,400-415  
NUMA node6 CPU(s): 96-111,416-431  
NUMA node7 CPU(s): 112-127,432-447  
NUMA node8 CPU(s): 128-143,448-463  
NUMA node9 CPU(s): 144-159,464-479  
NUMA node10 CPU(s): 160-175,480-495  
NUMA node11 CPU(s): 176-191,496-511  
NUMA node12 CPU(s): 192-207,512-527  
NUMA node13 CPU(s): 208-223,528-543  
NUMA node14 CPU(s): 224-239,544-559  
NUMA node15 CPU(s): 240-255,560-575  
NUMA node16 CPU(s): 256-271,576-591  
NUMA node17 CPU(s): 272-287,592-607  
NUMA node18 CPU(s): 288-303,608-623  
NUMA node19 CPU(s): 304-319,624-639  
Vulnerability Gather data sampling: Not affected  
Vulnerability Itlb multihit: Not affected  
Vulnerability L1tf: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Reg file data sampling: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec rstack overflow: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
Vulnerability Spectre vl: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_int\_base = 7.59

SPECspeed®2026\_int\_peak = 7.59

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Platform Notes (Continued)

Vulnerability Spectre v2: Mitigation: Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRBS-eIBRS Not affected; BHI Not affected

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

Vulnerability Vmscape: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	15M	12	Data	1	64	1	64
L1i	32K	10M	8	Instruction	1	64	1	64
L2	1M	320M	16	Unified	2	1024	1	64
L3	32M	640M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 20 nodes (0-19)
node 0 cpus: 0-15,320-335
node 0 size: 76893 MB
node 0 free: 76506 MB
node 1 cpus: 16-31,336-351
node 1 size: 77403 MB
node 1 free: 77138 MB
node 2 cpus: 32-47,352-367
node 2 size: 77401 MB
node 2 free: 77134 MB
node 3 cpus: 48-63,368-383
node 3 size: 77405 MB
node 3 free: 77155 MB
node 4 cpus: 64-79,384-399
node 4 size: 77405 MB
node 4 free: 77174 MB
node 5 cpus: 80-95,400-415
node 5 size: 77405 MB
node 5 free: 77057 MB
node 6 cpus: 96-111,416-431
node 6 size: 77405 MB
node 6 free: 77078 MB
node 7 cpus: 112-127,432-447
node 7 size: 77403 MB
node 7 free: 76210 MB
node 8 cpus: 128-143,448-463
node 8 size: 77403 MB
node 8 free: 77110 MB
node 9 cpus: 144-159,464-479
node 9 size: 77401 MB
node 9 free: 76142 MB

```

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_int\_base = 7.59

SPECspeed®2026\_int\_peak = 7.59

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2026  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jan-2026

## Platform Notes (Continued)

```

node 10 cpus: 160-175,480-495
node 10 size: 77403 MB
node 10 free: 77114 MB
node 11 cpus: 176-191,496-511
node 11 size: 77403 MB
node 11 free: 77172 MB
node 12 cpus: 192-207,512-527
node 12 size: 77401 MB
node 12 free: 77058 MB
node 13 cpus: 208-223,528-543
node 13 size: 77405 MB
node 13 free: 77163 MB
node 14 cpus: 224-239,544-559
node 14 size: 77405 MB
node 14 free: 77135 MB
node 15 cpus: 240-255,560-575
node 15 size: 77361 MB
node 15 free: 77043 MB
node 16 cpus: 256-271,576-591
node 16 size: 77405 MB
node 16 free: 77177 MB
node 17 cpus: 272-287,592-607
node 17 size: 77403 MB
node 17 free: 76792 MB
node 18 cpus: 288-303,608-623
node 18 size: 77403 MB
node 18 free: 77138 MB
node 19 cpus: 304-319,624-639
node 19 size: 77289 MB
node 19 free: 76999 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19
 0:  10 11 11 11 11 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32
 1:  11 10 11 11 11 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32
 2:  11 11 10 11 11 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32
 3:  11 11 11 10 11 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32
 4:  11 11 11 11 10 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32
 5:  12 12 12 12 12 10 11 11 11 11 32 32 32 32 32 32 32 32 32 32
 6:  12 12 12 12 12 11 10 11 11 11 32 32 32 32 32 32 32 32 32 32
 7:  12 12 12 12 12 11 11 10 11 11 32 32 32 32 32 32 32 32 32 32
 8:  12 12 12 12 12 11 11 11 10 11 32 32 32 32 32 32 32 32 32 32
 9:  12 12 12 12 12 11 11 11 11 10 32 32 32 32 32 32 32 32 32 32
10:  32 32 32 32 32 32 32 32 32 32 10 11 11 11 11 12 12 12 12 12
11:  32 32 32 32 32 32 32 32 32 32 11 10 11 11 11 12 12 12 12 12
12:  32 32 32 32 32 32 32 32 32 32 11 11 10 11 11 12 12 12 12 12
13:  32 32 32 32 32 32 32 32 32 32 11 11 11 10 11 12 12 12 12 12
14:  32 32 32 32 32 32 32 32 32 32 11 11 11 11 10 12 12 12 12 12

```

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_int\_base = 7.59

SPECspeed®2026\_int\_peak = 7.59

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2026  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jan-2026

## Platform Notes (Continued)

15:	32	32	32	32	32	32	32	32	32	32	12	12	12	12	12	10	11	11	11	11
16:	32	32	32	32	32	32	32	32	32	32	12	12	12	12	12	11	10	11	11	11
17:	32	32	32	32	32	32	32	32	32	32	12	12	12	12	12	11	11	10	11	11
18:	32	32	32	32	32	32	32	32	32	32	12	12	12	12	12	11	11	11	10	11
19:	32	32	32	32	32	32	32	32	32	32	12	12	12	12	12	11	11	11	11	10

9. /proc/meminfo  
MemTotal: 1584541772 kB

10. who -r  
run-level 5 Feb 8 20:27

11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)  
Default Target Status  
graphical running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell iscsid nftables rsync serial-getty@ ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-PCRlock-file-system systemd-PCRlock-firmware-code systemd-PCRlock-firmware-config systemd-PCRlock-machine-id systemd-PCRlock-make-policy systemd-PCRlock-secureboot-authority systemd-PCRlock-secureboot-policy systemd-sysext systemd-time-wait-sync upower
indirect	systemd-sysupdate systemd-sysupdate-reboot uidd
masked	cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-6.8.0-90-generic  
root=UUID=57c72845-ed81-43ec-a744-5b744b5d91fe  
ro

14. cpupower frequency-info

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_int\_base = 7.59

SPECspeed®2026\_int\_peak = 7.59

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

## Platform Notes (Continued)

analyzing CPU 115:

current policy: frequency should be within 1.50 GHz and 2.10 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

Boost States: 0

Total States: 3

Pstate-P0: 2100MHz

-----  
15. tuned-adm active

Current active profile: balanced  
-----

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

-----  
17. /sys/kernel/mm/transparent\_hugepage

defrag [always] defer defer+madvise madvise never

enabled [always] madvise never

hpage\_pmd\_size 2097152

shmem\_enabled always within\_size advise [never] deny force  
-----

18. /sys/kernel/mm/transparent\_hugepage/khugepaged

alloc\_sleep\_millisecs 60000  
-----

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_int\_base = 7.59

SPECspeed®2026\_int\_peak = 7.59

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Mar-2025

Software Availability: Jan-2026

## Platform Notes (Continued)

```

defrag                1
max_ptes_none        511
max_ptes_shared      256
max_ptes_swap        64
pages_to_scan        4096
scan_sleep_millisecs 10000

```

### 19. OS release

```

From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS

```

### 20. Disk information

SPEC is set to: /home/cpu2026

```

Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/nvme1n1p2 ext4  1.5T   32G  1.4T   3% /

```

### 21. /sys/devices/virtual/dmi/id

```

Vendor:      HPE
Product:     ProLiant DL385 Gen11
Product Family: ProLiant
Serial:     DL385G11-012

```

### 22. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```

19x Hynix HMC94AHBRA480N 64 GB 2 rank 6400
1x Micron MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400
4x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400

```

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```

BIOS Vendor:      HPE
BIOS Version:     2.90
BIOS Date:        01/09/2026
BIOS Revision:    2.90
Firmware Revision: 1.73

```



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_int\_base = 7.59

SPECspeed®2026\_int\_peak = 7.59

**CPU2026 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2026  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jan-2026

## Compiler Version Notes

=====  
C | 854.graph500\_s(base)  
-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin  
-----

=====  
C++ | 807.ntest\_s(base) 827.cppcheck\_s(base) 853.ns3\_s(base)  
-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin  
-----

=====  
C++, C | 801.xz\_s(base) 817.flac\_s(base) 821.gcc\_s(base) 823.llvm\_s(base)  
| 829.abc\_s(base) 834.vpr\_s(base) 835.gem5\_s(base) 838.diamond\_s(base)  
846.minizinc\_s(base)

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin  
-----

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Benchmarks using both C and C++:  
clang++ clang

## Base Portability Flags

801.xz\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed®2026\_int\_base = 7.59

SPECspeed®2026\_int\_peak = 7.59

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Base Portability Flags (Continued)

```

807.ntest_s: -DSPEC_LP64
817.flac_s: -DSPEC_LP64
821.gcc_s: -DSPEC_LP64
823.llvm_s: -DSPEC_LP64
827.cppcheck_s: -DSPEC_LP64
829.abc_s: -DSPEC_LP64
834.vpr_s: -fno-finite-math-only -DSPEC_LP64
835.gem5_s: -fno-finite-math-only -DSPEC_LP64
838.diamond_s: -DSPEC_LP64
846.minizinc_s: -DSPEC_LP64
853.ns3_s: -fno-finite-math-only -DSPEC_LP64
854.graph500_s: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3 -flto
-march=znver5 -fveclib=AMDLIBM -ffast-math -zopt -fremap-arrays
-fstrip-mining -fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50
-fopenmp -DSPEC_OPENMP -lamdalloc -lamdlibm -fopenmp=libomp -lomp

```

C++ benchmarks:

```

-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -fopenmp -DSPEC_OPENMP
-fvirtual-function-elimination -fvisibility=hidden -lamdalloc
-lamdlibm -fopenmp=libomp -lomp

```

Benchmarks using both C and C++:

```

-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -zopt -fremap-arrays -fstrip-mining
-fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-fopenmp -DSPEC_OPENMP -fvirtual-function-elimination
-fvisibility=hidden -lamdalloc -lamdlibm -fopenmp=libomp -lomp

```



# SPEC CPU<sup>®</sup>2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed<sup>®</sup>2026\_int\_base = 7.59

SPECspeed<sup>®</sup>2026\_int\_peak = 7.59

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

## Base Other Flags

C benchmarks:

-Wno-return-type

Benchmarks using both C and C++:

-Wno-return-type

## Peak Optimization Flags

C benchmarks:

854.graph500\_s: basepeak = yes

C++ benchmarks:

807.ntest\_s: basepeak = yes

827.cppcheck\_s: basepeak = yes

853.ns3\_s: basepeak = yes

Benchmarks using both C and C++:

801.xz\_s: basepeak = yes

817.flac\_s: basepeak = yes

821.gcc\_s: basepeak = yes

823.llvm\_s: basepeak = yes

829.abc\_s: basepeak = yes

834.vpr\_s: basepeak = yes

835.gem5\_s: basepeak = yes

838.diamond\_s: basepeak = yes

846.minizinc\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.html>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.html>



# SPEC CPU<sup>®</sup>2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECspeed<sup>®</sup>2026\_int\_base = 7.59

SPECspeed<sup>®</sup>2026\_int\_peak = 7.59

**CPU2026 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2026

**Hardware Availability:** Mar-2025

**Software Availability:** Jan-2026

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.xml>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU<sup>®</sup>2026 v0.902.0 on 2026-02-08 15:35:53-0500.

Report generated on 2026-05-04 23:33:37 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.