



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11


(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_fp_base = 666

SPECrate®2026_fp_peak = 666

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Jun-2023
Software Availability: Jan-2026

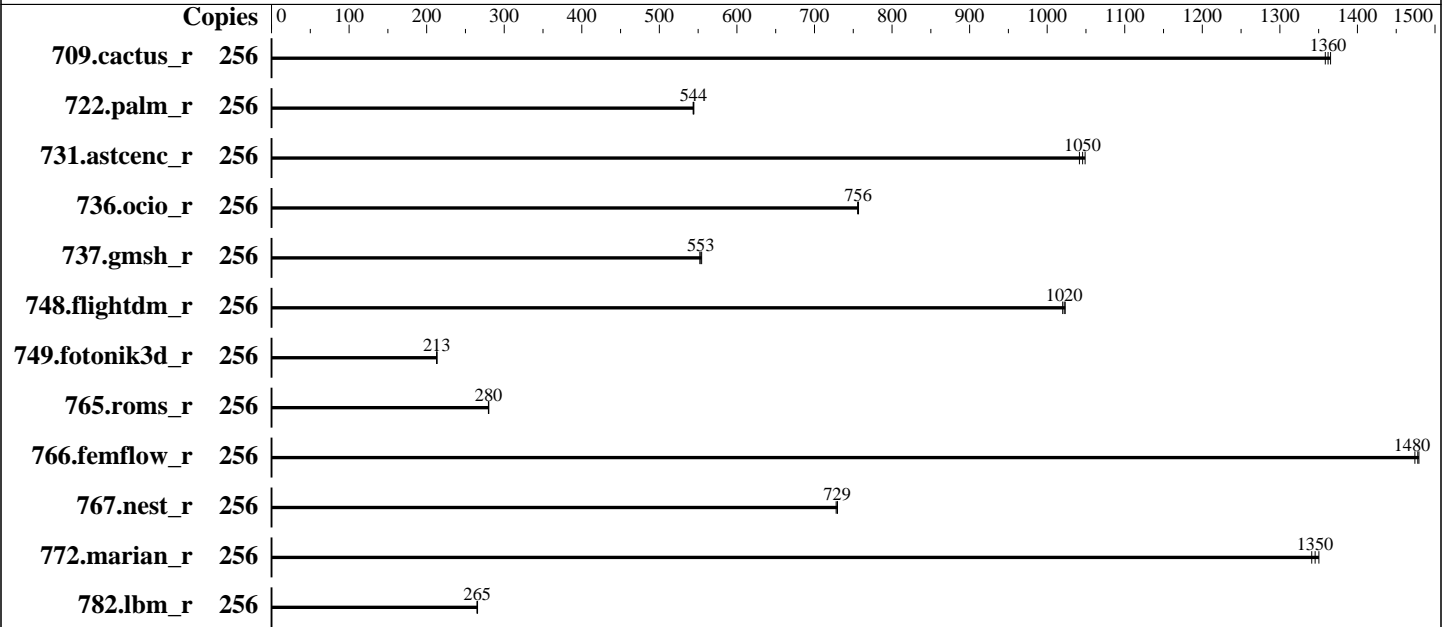

Hardware

CPU Name: AMD EPYC 9754
 Max MHz: 3100
 Nominal: 2250
 Enabled: 256 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 16 MB shared / 8 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 480 GB NVMe SSD
 Cooling: DLC
 Other: None

Software

OS: Ubuntu 24.04.3 LTS
 Kernel 6.8.0-90-generic
 Compiler: C/C++/Fortran: Version 5.1.0 of AOCC
 Compiler Category: Vendor
 Firmware: HPE BIOS Version v2.90
 released Jan-2026
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS is set to prefer performance at the cost of additional power usage



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_fp_base = 666

SPECrate®2026_fp_peak = 666

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Jun-2023
Software Availability: Jan-2026

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	256	162	1360	161	1370	<u>161</u>	<u>1360</u>	256	162	1360	161	1370	<u>161</u>	<u>1360</u>
722.palm_r	256	<u>621</u>	<u>544</u>	622	544	621	544	256	<u>621</u>	<u>544</u>	622	544	621	544
731.ascenc_r	256	205	1050	206	1040	<u>206</u>	<u>1050</u>	256	205	1050	206	1040	<u>206</u>	<u>1050</u>
736.ocio_r	256	296	757	296	756	<u>296</u>	<u>756</u>	256	296	757	296	756	<u>296</u>	<u>756</u>
737.gmsh_r	256	<u>212</u>	<u>553</u>	213	552	212	555	256	<u>212</u>	<u>553</u>	213	552	212	555
748.flightdm_r	256	179	1020	180	1020	<u>179</u>	<u>1020</u>	256	179	1020	180	1020	<u>179</u>	<u>1020</u>
749.fotonik3d_r	256	1388	213	1390	213	<u>1389</u>	<u>213</u>	256	1388	213	1390	213	<u>1389</u>	<u>213</u>
765.roms_r	256	1440	280	1442	280	<u>1441</u>	<u>280</u>	256	1440	280	1442	280	<u>1441</u>	<u>280</u>
766.femflow_r	256	255	1470	254	1480	<u>254</u>	<u>1480</u>	256	255	1470	254	1480	<u>254</u>	<u>1480</u>
767.nest_r	256	<u>278</u>	<u>729</u>	279	728	278	730	256	<u>278</u>	<u>729</u>	279	728	278	730
772.marian_r	256	299	1350	<u>300</u>	<u>1350</u>	301	1340	256	299	1350	<u>300</u>	<u>1350</u>	301	1340
782.lbm_r	256	<u>553</u>	<u>265</u>	552	266	554	265	256	<u>553</u>	<u>265</u>	552	266	554	265

SPECrate®2026_fp_base = **666**

SPECrate®2026_fp_peak = **666**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_fp_base = 666

SPECrate®2026_fp_peak = 666

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Operating System Notes (Continued)

To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and

'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2026/amd_rate_aocc510_znver5_A_lib/lib:/home/cpu2026/amd_rate_aocc510_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB

Memory using Ubuntu 24.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Throughput Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

AMD SMT Option set to Disabled

ACPI CST C2 Latency set to 18 microseconds

NUMA memory domains per socket set to Four memory domains per socket

Thermal Configuration set to Maximum Cooling

Data Fabric C-State Enable set to Force Enabled

Last-Level Cache (LLC) as NUMA Node set to Enabled

Workload Profile set to Custom

Power Regulator set to OS Control Mode

L2 HW Prefetcher set to Disabled

Sysinfo program /home/cpu2026/bin/sysinfo

Rev: 069f95da7e7f5d81b2ce48a82150e54f

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_fp_base = 666

SPECrate®2026_fp_peak = 666

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

running on admin1 Mon Feb 2 12:13:07 2026

SUT (System Under Test) info as seen by some common utilities.

----- Table of contents

- 1. uname -srvm
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

1. uname -srvm
Linux 6.8.0-90-generic #91-Ubuntu SMP PREEMPT_DYNAMIC Tue Nov 18 14:14:30 UTC 2025 x86_64

2. w
12:13:07 up 3 min, 5 users, load average: 0.55, 0.20, 0.07

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
admin1		10.30.195.96	12:12	3:34	0.00s	0.03s	sshd: admin1 [priv]
admin1		10.30.195.96	12:12	3:34	0.00s	0.02s	sshd: admin1 [priv]
admin1		10.30.195.96	12:12	3:35	0.00s	0.02s	sshd: admin1 [priv]
admin1		10.30.195.96	12:12	3:35	0.00s	0.03s	sshd: admin1 [priv]
admin1		10.30.195.94	12:10	3:35	0.00s	0.05s	sshd: admin1 [priv]

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_fp_base = 666

SPECrate®2026_fp_peak = 666

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

3. Username

From environment variable \$USER: root
From the command 'logname': adminl

4. ulimit -a

```
time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)       0
memory(kbytes)         unlimited
locked memory(kbytes)  2097152
process                6190765
nofiles                1024
vmemory(kbytes)       unlimited
locks                  unlimited
rtprio                 0
```

5. sysinfo process ancestry

```
/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: adminl [priv]
sshd: adminl@notty
sudo $SPEC/fprate.sh
/bin/bash $SPEC/fprate.sh
sudo ./run_amd_rate_aocc510_znver5_A1.py
python3 ./run_amd_rate_aocc510_znver5_A1.py
/bin/bash ./amd_rate_aocc510_znver5_A1.sh
runcpu --config amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9754 128-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 160
stepping       : 1
microcode      : 0xaa00116
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso vmscape
TLB size       : 3584 4K pages
```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_fp_base = 666

SPECrate®2026_fp_peak = 666

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

```

cpu cores      : 128
siblings      : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids
0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
240-247
physical id 1: core ids
0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
240-247
physical id 0: apicids
0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
240-247
physical id 1: apicids
256-263,272-279,288-295,304-311,320-327,336-343,352-359,368-375,384-391,400-407,416-423,432-439,448-455,4
64-471,480-487,496-503

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 256
On-line CPU(s) list:   0-255
Vendor ID:              AuthenticAMD
BIOS Vendor ID:        Advanced Micro Devices, Inc.
Model name:             AMD EPYC 9754 128-Core Processor
BIOS Model name:       AMD EPYC 9754 128-Core Processor          CPU @ 2.2GHz
BIOS CPU family:       107
CPU family:             25
Model:                  160
Thread(s) per core:    1
Core(s) per socket:    128
Socket(s):              2
Stepping:               1
Frequency boost:        enabled
CPU(s) scaling MHz:    100%
CPU max MHz:           2250.0000
CPU min MHz:           1500.0000
BogoMIPS:               4493.33
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                        pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb

```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_fp_base = 666

SPECrate®2026_fp_peak = 666

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

```

rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
amd_ppin cpc amd_ibpb_ret arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld
debug_swap ibpb_exit_to_user

```

Virtualization:

AMD-V

L1d cache:

8 MiB (256 instances)

L1i cache:

8 MiB (256 instances)

L2 cache:

256 MiB (256 instances)

L3 cache:

512 MiB (32 instances)

NUMA node(s):

32

NUMA node0 CPU(s):

0-7

NUMA node1 CPU(s):

8-15

NUMA node2 CPU(s):

16-23

NUMA node3 CPU(s):

24-31

NUMA node4 CPU(s):

32-39

NUMA node5 CPU(s):

40-47

NUMA node6 CPU(s):

48-55

NUMA node7 CPU(s):

56-63

NUMA node8 CPU(s):

64-71

NUMA node9 CPU(s):

72-79

NUMA node10 CPU(s):

80-87

NUMA node11 CPU(s):

88-95

NUMA node12 CPU(s):

96-103

NUMA node13 CPU(s):

104-111

NUMA node14 CPU(s):

112-119

NUMA node15 CPU(s):

120-127

NUMA node16 CPU(s):

128-135

NUMA node17 CPU(s):

136-143

NUMA node18 CPU(s):

144-151

NUMA node19 CPU(s):

152-159

NUMA node20 CPU(s):

160-167

NUMA node21 CPU(s):

168-175

NUMA node22 CPU(s):

176-183

NUMA node23 CPU(s):

184-191

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_fp_base = 666

SPECrate®2026_fp_peak = 666

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

```

NUMA node24 CPU(s):          192-199
NUMA node25 CPU(s):          200-207
NUMA node26 CPU(s):          208-215
NUMA node27 CPU(s):          216-223
NUMA node28 CPU(s):          224-231
NUMA node29 CPU(s):          232-239
NUMA node30 CPU(s):          240-247
NUMA node31 CPU(s):          248-255
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:                Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:    Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:           Not affected
Vulnerability Spec rstack overflow: Mitigation; Safe RET
Vulnerability Spec store bypass:   Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:          Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:          Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                   disabled; RSB filling; PBRsB-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:              Not affected
Vulnerability Tsx async abort:     Not affected
Vulnerability Vmscape:             Mitigation; IBPB before exit to userspace

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	8M	8	Data	1	64	1	64
L1i	32K	8M	8	Instruction	1	64	1	64
L2	1M	256M	8	Unified	2	2048	1	64
L3	16M	512M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 32 nodes (0-31)

node 0 cpus: 0-7

node 0 size: 48065 MB

node 0 free: 47824 MB

node 1 cpus: 8-15

node 1 size: 48381 MB

node 1 free: 48221 MB

node 2 cpus: 16-23

node 2 size: 48381 MB

node 2 free: 48256 MB

node 3 cpus: 24-31

node 3 size: 48381 MB

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_fp_base = 666

SPECrate®2026_fp_peak = 666

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

```

node 3 free: 47977 MB
node 4 cpus: 32-39
node 4 size: 48381 MB
node 4 free: 48233 MB
node 5 cpus: 40-47
node 5 size: 48381 MB
node 5 free: 48271 MB
node 6 cpus: 48-55
node 6 size: 48381 MB
node 6 free: 48234 MB
node 7 cpus: 56-63
node 7 size: 48337 MB
node 7 free: 48218 MB
node 8 cpus: 64-71
node 8 size: 48381 MB
node 8 free: 48254 MB
node 9 cpus: 72-79
node 9 size: 48381 MB
node 9 free: 48248 MB
node 10 cpus: 80-87
node 10 size: 48381 MB
node 10 free: 48259 MB
node 11 cpus: 88-95
node 11 size: 48381 MB
node 11 free: 48230 MB
node 12 cpus: 96-103
node 12 size: 48381 MB
node 12 free: 48263 MB
node 13 cpus: 104-111
node 13 size: 48381 MB
node 13 free: 48253 MB
node 14 cpus: 112-119
node 14 size: 48381 MB
node 14 free: 48259 MB
node 15 cpus: 120-127
node 15 size: 48381 MB
node 15 free: 48257 MB
node 16 cpus: 128-135
node 16 size: 48381 MB
node 16 free: 48256 MB
node 17 cpus: 136-143
node 17 size: 48381 MB
node 17 free: 48272 MB
node 18 cpus: 144-151
node 18 size: 48381 MB
node 18 free: 48268 MB
node 19 cpus: 152-159

```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_fp_base = 666

SPECrate®2026_fp_peak = 666

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

```

node 19 size: 48381 MB
node 19 free: 48272 MB
node 20 cpus: 160-167
node 20 size: 48381 MB
node 20 free: 48253 MB
node 21 cpus: 168-175
node 21 size: 48381 MB
node 21 free: 48272 MB
node 22 cpus: 176-183
node 22 size: 48381 MB
node 22 free: 48259 MB
node 23 cpus: 184-191
node 23 size: 48381 MB
node 23 free: 48230 MB
node 24 cpus: 192-199
node 24 size: 48381 MB
node 24 free: 48246 MB
node 25 cpus: 200-207
node 25 size: 48381 MB
node 25 free: 48263 MB
node 26 cpus: 208-215
node 26 size: 48381 MB
node 26 free: 48255 MB
node 27 cpus: 216-223
node 27 size: 48381 MB
node 27 free: 48264 MB
node 28 cpus: 224-231
node 28 size: 48381 MB
node 28 free: 48197 MB
node 29 cpus: 232-239
node 29 size: 48381 MB
node 29 free: 48215 MB
node 30 cpus: 240-247
node 30 size: 48381 MB
node 30 free: 48263 MB
node 31 cpus: 248-255
node 31 size: 48315 MB
node 31 free: 48159 MB
node distances:

```

```

node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
0: 10 11 11 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
1: 11 10 11 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32
32 32 32 32 32 32
2: 11 11 10 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32
32 32 32 32 32 32

```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_fp_base = 666

SPECrate®2026_fp_peak = 666

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Jun-2023
Software Availability: Jan-2026

Platform Notes (Continued)

3: 11 11 11 10 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32

4: 12 12 12 12 10 11 11 11 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32

5: 12 12 12 12 11 10 11 11 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32

6: 12 12 12 12 11 11 10 11 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32

7: 12 12 12 12 11 11 11 10 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32

8: 12 12 12 12 12 12 12 12 10 11 11 11 12 12 12 12 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32

9: 12 12 12 12 12 12 12 12 11 10 11 11 12 12 12 12 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32

10: 12 12 12 12 12 12 12 12 11 11 10 11 12 12 12 12 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32

11: 12 12 12 12 12 12 12 12 11 11 11 10 12 12 12 12 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32

12: 12 12 12 12 12 12 12 12 12 12 12 12 10 11 11 11 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32

13: 12 12 12 12 12 12 12 12 12 12 12 12 11 10 11 11 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32

14: 12 12 12 12 12 12 12 12 12 12 12 12 11 11 10 11 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32

15: 12 12 12 12 12 12 12 12 12 12 12 12 11 11 11 10 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32

16: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 10 11 11 11 12 12 12 12
 12 12 12 12 12 12 12

17: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 10 11 11 12 12 12 12
 12 12 12 12 12 12 12

18: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 10 11 12 12 12 12
 12 12 12 12 12 12 12

19: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 10 12 12 12 12
 12 12 12 12 12 12 12

20: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 10 11 11 12
 12 12 12 12 12 12 12

21: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 11 10 11 12
 12 12 12 12 12 12 12

22: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 11 11 10 12
 12 12 12 12 12 12 12

23: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 11 11 11 10
 12 12 12 12 12 12 12

24: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 10
 11 11 11 12 12 12 12

25: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 11
 10 11 11 12 12 12 12

26: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 11

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_fp_base = 666

SPECrate®2026_fp_peak = 666

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

```

11  10  11  12  12  12  12
27: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 11
11  11  10  12  12  12  12
28: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12
12  12  12  10  11  11  11
29: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12
12  12  12  11  10  11  11
30: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12
12  12  12  11  11  10  11
31: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12
12  12  12  11  11  11  10

```

```

-----
9. /proc/meminfo
   MemTotal:          1584917768 kB

```

```

-----
10. who -r
    run-level 5 Feb 2 12:09

```

```

-----
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)
    Default Target  Status
    graphical       running

```

```

-----
12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
enabled           ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init
                  cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                  grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd
networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
                  snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore
                  systemd-resolved thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw
                  unattended-upgrades vgauth
enabled-runtime   netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled          console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
                  systemd-boot-check-no-failures systemd-confext systemd-network-generator
systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysex
                  systemd-time-wait-sync systemd-timesyncd upower
indirect          systemd-sysupdate systemd-sysupdate-reboot uidd
masked            cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline

```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_fp_base = 666

SPECrate®2026_fp_peak = 666

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

```
BOOT_IMAGE=/boot/vmlinuz-6.8.0-90-generic
root=UUID=60685607-d408-4b5d-9478-a6a431e11442
ro
```

14. cpupower frequency-info

analyzing CPU 226:

current policy: frequency should be within 1.50 GHz and 2.25 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

Boost States: 0

Total States: 3

Pstate-P0: 2250MHz

15. tuned-adm active

Current active profile: balanced

16. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

17. /sys/kernel/mm/transparent_hugepage

```
defrag          [always] defer+madvise madvise never
enabled         [always] madvise never
```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_fp_base = 666

SPECrate®2026_fp_peak = 666

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

```
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
```

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

19. OS release

```
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS
```

20. Disk information

SPEC is set to: /home/cpu2026

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext4 439G 53G 363G 13% /
```

21. /sys/devices/virtual/dmi/id

```
Vendor: HPE
Product: ProLiant DL385 Gen11
Product Family: ProLiant
Serial: DL385G11-003
```

22. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
11x Hynix HMCG94AEBRA103N 64 GB 2 rank 4800
1x Hynix HMCG94AEBRA109N 64 GB 2 rank 4800
5x Hynix HMCG94AEBRA123N 64 GB 2 rank 4800
7x Hynix HMCG94MEBRA121N 64 GB 2 rank 4800
```

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_fp_base = 666

SPECrate®2026_fp_peak = 666

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

BIOS Vendor: HPE
BIOS Version: 2.90
BIOS Date: 01/09/2026
BIOS Revision: 2.90
Firmware Revision: 1.63

Compiler Version Notes

=====
C | 782.lbm_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====
C++ | 731.astcenc_r(base) 736.ocio_r(base) 748.flightdm_r(base)
766.femflow_r(base) 767.nest_r(base) 772.marian_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====
C++, C | 709.cactus_r(base) 737.gmsh_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====
Fortran | 722.palm_r(base) 749.fotonik3d_r(base) 765.roms_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_fp_base = 666

SPECrate®2026_fp_peak = 666

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both C and C++:

clang++ clang

Base Portability Flags

709.cactus_r: -DSPEC_LP64

722.palm_r: -DSPEC_LP64

731.ascenc_r: -DSPEC_LP64

736.ocio_r: -fno-finite-math-only -DSPEC_LP64

737.gmsh_r: -fno-fast-math -DSPEC_LP64

748.flightdm_r: -fno-reciprocal-math -DSPEC_LP64

749.fotonik3d_r: -DSPEC_LP64

765.roms_r: -DSPEC_LP64

766.femflow_r: -DSPEC_LP64

767.nest_r: -fno-finite-math-only -DSPEC_LP64

772.marian_r: -DSPEC_LP64

782.lbm_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather

-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie

-flto -fstruct-layout=7 -mllvm -unroll-threshold=50

-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining

-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc

-lflang

C++ benchmarks:

-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_fp_base = 666

SPECrate®2026_fp_peak = 666

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -mstandard -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -ffast-math -O3
-march=znver5 -fveclib=AMDLIBM -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

Peak Optimization Flags

C benchmarks:

782.lbm_r: basepeak = yes

C++ benchmarks:

731.astcenc_r: basepeak = yes

736.ocio_r: basepeak = yes

748.flightdm_r: basepeak = yes

766.femflow_r: basepeak = yes

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_fp_base = 666

SPECrate®2026_fp_peak = 666

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Jun-2023
Software Availability: Jan-2026

Peak Optimization Flags (Continued)

767.nest_r: basepeak = yes

772.marian_r: basepeak = yes

Fortran benchmarks:

722.palm_r: basepeak = yes

749.fotonik3d_r: basepeak = yes

765.roms_r: basepeak = yes

Benchmarks using both C and C++:

709.cactus_r: basepeak = yes

737.gmsh_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.html>
<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.xml>
<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-02 07:13:06-0500.
Report generated on 2026-05-11 16:38:26 by CPU2026 PDF formatter (unknown).
Originally published on 2026-05-05.