



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECspeed®2026_fp_base = 13.0

SPECspeed®2026_fp_peak = 13.0

CPU2026 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

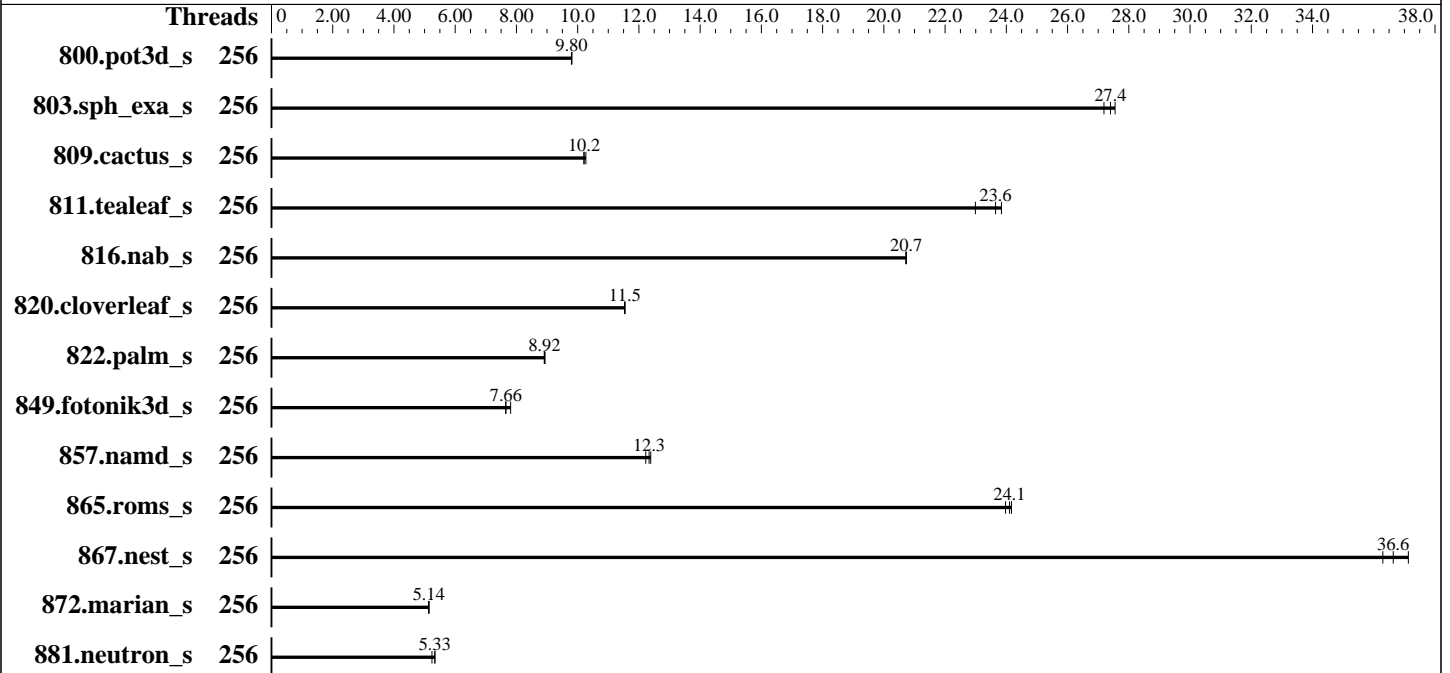

Hardware

CPU Name: AMD EPYC 9754
 Max MHz: 3100
 Nominal: 2250
 Enabled: 256 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 16 MB shared / 8 cores
 Other: None
 Memory: 3 TB (24 x 128 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 480 GB NVMe SSD
 Cooling: DLC
 Other: None

Software

OS: Ubuntu 24.04.3 LTS
 Kernel 6.8.0-94-generic
 Compiler: C/C++: Version 5.1.0 of AOCC
 Fortran: Flang v22
 Compiler Category: Vendor
 Firmware: HPE BIOS Version v2.90
 released Jan-2026
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS is set to prefer performance at the cost of additional power usage



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECspeed®2026_fp_base = 13.0

SPECspeed®2026_fp_peak = 13.0

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Jun-2023
Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
800.pot3d_s	256	68.7	9.80	68.7	9.80	68.6	9.81	256	68.7	9.80	68.7	9.80	68.6	9.81
803.sph_exa_s	256	45.5	27.2	44.9	27.6	45.2	27.4	256	45.5	27.2	44.9	27.6	45.2	27.4
809.cactus_s	256	110	10.2	109	10.3	110	10.2	256	110	10.2	109	10.3	110	10.2
811.tealeaf_s	256	23.4	23.8	24.2	23.0	23.6	23.6	256	23.4	23.8	24.2	23.0	23.6	23.6
816.nab_s	256	54.3	20.7	54.3	20.7	54.3	20.7	256	54.3	20.7	54.3	20.7	54.3	20.7
820.cloverleaf_s	256	74.3	11.5	74.2	11.5	74.3	11.5	256	74.3	11.5	74.2	11.5	74.3	11.5
822.palm_s	256	138	8.91	138	8.92	137	8.94	256	138	8.91	138	8.92	137	8.94
849.fotonik3d_s	256	84.5	7.81	86.3	7.65	86.2	7.66	256	84.5	7.81	86.3	7.65	86.2	7.66
857.namd_s	256	117	12.4	119	12.2	118	12.3	256	117	12.4	119	12.2	118	12.3
865.roms_s	256	45.5	24.0	45.1	24.2	45.2	24.1	256	45.5	24.0	45.1	24.2	45.2	24.1
867.nest_s	256	58.2	37.1	59.5	36.3	59.0	36.6	256	58.2	37.1	59.5	36.3	59.0	36.6
872.marian_s	256	211	5.14	210	5.15	211	5.13	256	211	5.14	210	5.15	211	5.13
881.neutron_s	256	153	5.34	153	5.33	155	5.24	256	153	5.34	153	5.33	155	5.24

SPECspeed®2026_fp_base = 13.0

SPECspeed®2026_fp_peak = 13.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>
Flang v22 is available at
<https://flang.llvm.org/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECspeed®2026_fp_base = 13.0

SPECspeed®2026_fp_peak = 13.0

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Operating System Notes (Continued)

```
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-255"
LD_LIBRARY_PATH =
  "/home/cpu2026/amd_speed_aocc510_flang22_znver5_A_lib/lib:/home/cpu2026/
  amd_speed_aocc510_flang22_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with an AMD EPYC 9754 CPU + 768 GiB Memory using Ubuntu 24.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Peak Frequency Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

AMD SMT Option set to Disabled

Last-Level Cache (LLC) as NUMA Node set to Enabled

ACPI CST C2 Latency set to 18 microseconds

Thermal Configuration set to Maximum Cooling

Workload Profile set to Custom

Power Regulator set to OS Control Mode

Sysinfo program /home/cpu2026/bin/sysinfo
Rev: 069f95da7e7f5d81b2ce48a82150e54f

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECspeed®2026_fp_base = 13.0

SPECspeed®2026_fp_peak = 13.0

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

running on admin1 Sun Feb 8 20:27:19 2026

SUT (System Under Test) info as seen by some common utilities.

----- Table of contents

- 1. uname -srvm
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

1. uname -srvm
Linux 6.8.0-94-generic #96-Ubuntu SMP PREEMPT_DYNAMIC Fri Jan 9 20:36:55 UTC 2026 x86_64

2. w
20:27:19 up 7 min, 1 user, load average: 0.16, 0.10, 0.07

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
admin1		10.30.195.94	20:24	7:19	0.00s	0.05s	sshd: admin1 [priv]

3. Username
From environment variable \$USER: root
From the command 'logname': admin1

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECspeed®2026_fp_base = 13.0

SPECspeed®2026_fp_peak = 13.0

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

4. ulimit -a

```

time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)      0
memory(kbytes)         unlimited
locked memory(kbytes) 2097152
process                12383913
nofiles                1024
vmemory(kbytes)        unlimited
locks                  unlimited
rtprio                 0

```

5. sysinfo process ancestry

```

/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: admin1 [priv]
sshd: admin1@pts/0
-bash
sudo su
sudo su
su
bash
python3 ./run_amd_speed_aocc510_flang22_znver5_A1.py
/bin/bash ./amd_speed_aocc510_flang22_znver5_A1.sh
runcpu --config amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 3
--nopower --runmode speed --tune base --size test:train:refspeed fpspeed --nopreenv --note-preenv
--logfile $SPEC/tmp/CPU2026.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026

```

6. /proc/cpuinfo

```

model name      : AMD EPYC 9754 128-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 160
stepping       : 1
microcode      : 0xaa00116
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso vmscape
TLB size       : 3584 4K pages
cpu cores      : 128
siblings       : 128

```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECspeed®2026_fp_base = 13.0

SPECspeed®2026_fp_peak = 13.0

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

2 physical ids (chips)

256 processors (hardware threads)

physical id 0: core ids

0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,240-247

physical id 1: core ids

0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,240-247

physical id 0: apicids

0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,240-247

physical id 1: apicids

256-263,272-279,288-295,304-311,320-327,336-343,352-359,368-375,384-391,400-407,416-423,432-439,448-455,464-471,480-487,496-503

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                       256
On-line CPU(s) list:         0-255
Vendor ID:                    AuthenticAMD
BIOS Vendor ID:              Advanced Micro Devices, Inc.
Model name:                   AMD EPYC 9754 128-Core Processor
BIOS Model name:              AMD EPYC 9754 128-Core Processor          CPU @ 2.2GHz
BIOS CPU family:              107
CPU family:                   25
Model:                        160
Thread(s) per core:           1
Core(s) per socket:           128
Socket(s):                    2
Stepping:                     1
Frequency boost:              enabled
CPU(s) scaling MHz:          100%
CPU max MHz:                  2250.0000
CPU min MHz:                  1500.0000
BogoMIPS:                     4493.33

```

```

Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                               pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                               rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                               extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid

```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECspeed®2026_fp_base = 13.0

SPECspeed®2026_fp_peak = 13.0

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

```

sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld
debug_swap ibpb_exit_to_user

```

```

Virtualization: AMD-V
L1d cache: 8 MiB (256 instances)
L1i cache: 8 MiB (256 instances)
L2 cache: 256 MiB (256 instances)
L3 cache: 512 MiB (32 instances)
NUMA node(s): 32
NUMA node0 CPU(s): 0-7
NUMA node1 CPU(s): 8-15
NUMA node2 CPU(s): 16-23
NUMA node3 CPU(s): 24-31
NUMA node4 CPU(s): 32-39
NUMA node5 CPU(s): 40-47
NUMA node6 CPU(s): 48-55
NUMA node7 CPU(s): 56-63
NUMA node8 CPU(s): 64-71
NUMA node9 CPU(s): 72-79
NUMA node10 CPU(s): 80-87
NUMA node11 CPU(s): 88-95
NUMA node12 CPU(s): 96-103
NUMA node13 CPU(s): 104-111
NUMA node14 CPU(s): 112-119
NUMA node15 CPU(s): 120-127
NUMA node16 CPU(s): 128-135
NUMA node17 CPU(s): 136-143
NUMA node18 CPU(s): 144-151
NUMA node19 CPU(s): 152-159
NUMA node20 CPU(s): 160-167
NUMA node21 CPU(s): 168-175
NUMA node22 CPU(s): 176-183
NUMA node23 CPU(s): 184-191
NUMA node24 CPU(s): 192-199
NUMA node25 CPU(s): 200-207

```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECspeed®2026_fp_base = 13.0

SPECspeed®2026_fp_peak = 13.0

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Jun-2023
Software Availability: Jan-2026

Platform Notes (Continued)

```

NUMA node26 CPU(s):          208-215
NUMA node27 CPU(s):          216-223
NUMA node28 CPU(s):          224-231
NUMA node29 CPU(s):          232-239
NUMA node30 CPU(s):          240-247
NUMA node31 CPU(s):          248-255
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:                Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:     Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:           Not affected
Vulnerability Spec rstack overflow: Mitigation; Safe RET
Vulnerability Spec store bypass:   Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:          Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:          Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                   disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:              Not affected
Vulnerability Tsx async abort:     Not affected
Vulnerability Vmscape:             Mitigation; IBPB before exit to userspace

```

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	8M	8	Data	1	64	1	64
L1i	32K	8M	8	Instruction	1	64	1	64
L2	1M	256M	8	Unified	2	2048	1	64
L3	16M	512M	16	Unified	3	16384	1	64

8. `numactl --hardware`

NOTE: a `numactl 'node'` might or might not correspond to a physical chip.

available: 32 nodes (0-31)

```

node 0 cpus: 0-7
node 0 size: 96449 MB
node 0 free: 95942 MB
node 1 cpus: 8-15
node 1 size: 96765 MB
node 1 free: 96646 MB
node 2 cpus: 16-23
node 2 size: 96765 MB
node 2 free: 96637 MB
node 3 cpus: 24-31
node 3 size: 96765 MB
node 3 free: 96664 MB
node 4 cpus: 32-39

```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECspeed®2026_fp_base = 13.0

SPECspeed®2026_fp_peak = 13.0

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

```

node 4 size: 96765 MB
node 4 free: 96629 MB
node 5 cpus: 40-47
node 5 size: 96765 MB
node 5 free: 96646 MB
node 6 cpus: 48-55
node 6 size: 96765 MB
node 6 free: 96623 MB
node 7 cpus: 56-63
node 7 size: 96765 MB
node 7 free: 96606 MB
node 8 cpus: 64-71
node 8 size: 96765 MB
node 8 free: 96593 MB
node 9 cpus: 72-79
node 9 size: 96765 MB
node 9 free: 96645 MB
node 10 cpus: 80-87
node 10 size: 96765 MB
node 10 free: 96620 MB
node 11 cpus: 88-95
node 11 size: 96765 MB
node 11 free: 96599 MB
node 12 cpus: 96-103
node 12 size: 96765 MB
node 12 free: 96615 MB
node 13 cpus: 104-111
node 13 size: 96765 MB
node 13 free: 96618 MB
node 14 cpus: 112-119
node 14 size: 96765 MB
node 14 free: 96651 MB
node 15 cpus: 120-127
node 15 size: 96765 MB
node 15 free: 96650 MB
node 16 cpus: 128-135
node 16 size: 96721 MB
node 16 free: 96587 MB
node 17 cpus: 136-143
node 17 size: 96765 MB
node 17 free: 96643 MB
node 18 cpus: 144-151
node 18 size: 96765 MB
node 18 free: 96650 MB
node 19 cpus: 152-159
node 19 size: 96765 MB
node 19 free: 96640 MB

```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECspeed®2026_fp_base = 13.0

SPECspeed®2026_fp_peak = 13.0

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Jun-2023
Software Availability: Jan-2026

Platform Notes (Continued)

```

node 20 cpus: 160-167
node 20 size: 96765 MB
node 20 free: 96670 MB
node 21 cpus: 168-175
node 21 size: 96765 MB
node 21 free: 96656 MB
node 22 cpus: 176-183
node 22 size: 96765 MB
node 22 free: 96639 MB
node 23 cpus: 184-191
node 23 size: 96765 MB
node 23 free: 96647 MB
node 24 cpus: 192-199
node 24 size: 96765 MB
node 24 free: 96659 MB
node 25 cpus: 200-207
node 25 size: 96765 MB
node 25 free: 96649 MB
node 26 cpus: 208-215
node 26 size: 96765 MB
node 26 free: 96653 MB
node 27 cpus: 216-223
node 27 size: 96699 MB
node 27 free: 96597 MB
node 28 cpus: 224-231
node 28 size: 96765 MB
node 28 free: 96657 MB
node 29 cpus: 232-239
node 29 size: 96765 MB
node 29 free: 96645 MB
node 30 cpus: 240-247
node 30 size: 96765 MB
node 30 free: 96668 MB
node 31 cpus: 248-255
node 31 size: 96765 MB
node 31 free: 96630 MB
node distances:

```

node	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
25	26	27	28	29	30	31																			
0:	10	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	32	32	32	32	32	32	32	32	32
	32	32	32	32	32	32	32																		
1:	11	10	11	11	11	11	11	11	11	11	11	11	11	11	11	11	32	32	32	32	32	32	32	32	32
	32	32	32	32	32	32	32	32																	
2:	11	11	10	11	11	11	11	11	11	11	11	11	11	11	11	11	32	32	32	32	32	32	32	32	32
	32	32	32	32	32	32	32	32																	
3:	11	11	11	10	11	11	11	11	11	11	11	11	11	11	11	11	32	32	32	32	32	32	32	32	32
	32	32	32	32	32	32	32	32																	

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECspeed®2026_fp_base = 13.0

SPECspeed®2026_fp_peak = 13.0

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Jun-2023
Software Availability: Jan-2026

Platform Notes (Continued)

4: 11 11 11 11 10 11 11 11 11 11 11 11 11 11 11 11 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32

5: 11 11 11 11 11 10 11 11 11 11 11 11 11 11 11 11 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32

6: 11 11 11 11 11 11 10 11 11 11 11 11 11 11 11 11 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32

7: 11 11 11 11 11 11 11 10 11 11 11 11 11 11 11 11 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32

8: 11 11 11 11 11 11 11 11 10 11 11 11 11 11 11 11 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32

9: 11 11 11 11 11 11 11 11 11 10 11 11 11 11 11 11 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32

10: 11 11 11 11 11 11 11 11 11 11 10 11 11 11 11 11 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32

11: 11 11 11 11 11 11 11 11 11 11 11 10 11 11 11 11 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32

12: 11 11 11 11 11 11 11 11 11 11 11 10 11 11 11 11 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32

13: 11 11 11 11 11 11 11 11 11 11 11 10 11 11 11 11 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32

14: 11 11 11 11 11 11 11 11 11 11 11 11 11 10 11 11 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32

15: 11 11 11 11 11 11 11 11 11 11 11 11 11 11 10 32 32 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32

16: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 10 11 11 11 11 11 11 11 11
11 11 11 11 11 11 11

17: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 10 11 11 11 11 11 11 11
11 11 11 11 11 11 11

18: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 10 11 11 11 11 11 11
11 11 11 11 11 11 11

19: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 10 11 11 11 11 11
11 11 11 11 11 11 11

20: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 10 11 11 11 11
11 11 11 11 11 11 11

21: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 10 11 11 11
11 11 11 11 11 11 11

22: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 10 11 11
11 11 11 11 11 11 11

23: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 10 11
11 11 11 11 11 11 11

24: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 11 10
11 11 11 11 11 11 11

25: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 11 11
10 11 11 11 11 11 11

26: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 11 11
11 10 11 11 11 11 11

27: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 11 11

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECspeed®2026_fp_base = 13.0

SPECspeed®2026_fp_peak = 13.0

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

```

11 11 10 11 11 11 11
28: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 11
11 11 11 10 11 11 11
29: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 11
11 11 11 11 10 11 11
30: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 11
11 11 11 11 11 10 11
31: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 11
11 11 11 11 11 11 10

```

```

-----
9. /proc/meminfo
   MemTotal:      3170363732 kB

```

```

-----
10. who -r
    run-level 5 Feb 8 20:20

```

```

-----
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)
    Default Target   Status
    graphical        running

```

```

-----
12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
enabled           ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init
                  cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                  grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd
networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
                  snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore
                  systemd-resolved thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw
unattended-upgrades vgauth
enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled         console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
                  systemd-boot-check-no-failures systemd-confext systemd-network-generator
systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysex
                  systemd-time-wait-sync systemd-timesyncd upower
indirect         systemd-sysupdate systemd-sysupdate-reboot uidd
masked           cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-6.8.0-generic
    root=UUID=60685607-d408-4b5d-9478-a6a431e11442

```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECspeed®2026_fp_base = 13.0

SPECspeed®2026_fp_peak = 13.0

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

ro

14. cpupower frequency-info

analyzing CPU 12:

current policy: frequency should be within 1.50 GHz and 2.25 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

Boost States: 0

Total States: 3

Pstate-P0: 2250MHz

15. tuned-adm active

Current active profile: balanced

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

17. /sys/kernel/mm/transparent_hugepage

defrag	[always] defer defer+madvise madvise never
enabled	[always] madvise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECspeed®2026_fp_base = 13.0

SPECspeed®2026_fp_peak = 13.0

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

19. OS release

```
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS
```

20. Disk information

SPEC is set to: /home/cpu2026

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext4 439G 60G 356G 15% /
```

21. /sys/devices/virtual/dmi/id

```
Vendor: HPE
Product: ProLiant DL385 Gen11
Product Family: ProLiant
Serial: DL385G11-006
```

22. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
5x Hynix HMCT04MEERA129N 128 GB 4 rank 4800
3x Hynix HMCT04MEERA131N 128 GB 4 rank 4800
11x Hynix HMCT04MEERA133N 128 GB 4 rank 4800
5x Hynix HMCT04MEERA135N 128 GB 4 rank 4800
```

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor: HPE
BIOS Version: 2.90
```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECspeed®2026_fp_base = 13.0

SPECspeed®2026_fp_peak = 13.0

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Jun-2023
Software Availability: Jan-2026

Platform Notes (Continued)

BIOS Date: 01/09/2026
BIOS Revision: 2.90
Firmware Revision: 1.66

Compiler Version Notes

=====
C | 811.tealeaf_s(base) 816.nab_s(base) 881.neutron_s(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====
C++ | 803.sph_exa_s(base) 857.namd_s(base) 867.nest_s(base)
872.marian_s(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====
C++, C | 809.cactus_s(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====
Fortran | 800.pot3d_s(base) 820.cloverleaf_s(base) 822.palm_s(base)
849.fotonik3d_s(base) 865.roms_s(base)

flang version 22.1.0-rc2 (https://github.com/llvm/llvm-project
a47b42eb9f9b302167b4fc413e6c92798d65dd0b)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/llvm/llvm-22.1.0-rc2/install/bin



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECspeed®2026_fp_base = 13.0

SPECspeed®2026_fp_peak = 13.0

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang-22

Benchmarks using both C and C++:

clang++ clang

Base Portability Flags

```

800.pot3d_s: -DSPEC_LP64
803.sph_exa_s: -DSPEC_LP64
809.cactus_s: -DSPEC_LP64
811.tealeaf_s: -DSPEC_LP64
816.nab_s: -DSPEC_LP64
820.cloverleaf_s: -DSPEC_LP64
822.palm_s: -DSPEC_LP64
849.fotonik3d_s: -DSPEC_LP64
857.namd_s: -DSPEC_LP64
865.roms_s: -DSPEC_LP64
867.nest_s: -fno-finite-math-only -DSPEC_LP64
872.marian_s: -DSPEC_LP64
881.neutron_s: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -fremap-arrays -fstrip-mining
-fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt
-mrecip=none -fopenmp -DSPEC_OPENMP -lamdalloc -lamdlibm
-fopenmp=libomp -lomp

```

C++ benchmarks:

```

-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5

```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECspeed®2026_fp_base = 13.0

SPECspeed®2026_fp_peak = 13.0

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fopenmp -DSPEC_OPENMP
-pthread -lamdalloc -lamdlibm -fopenmp=libomp -lomp
```

Fortran benchmarks:

```
-m64 -std=f2018 -O3 -flto -march=znver5 -fveclib=AMDLIBM
-ffast-math -funroll-loops -DSPEC_OPENMP -fopenmp
-fdo-concurrent-to-openmp=host -lamdalloc -lamdlibm -fopenmp=libomp
-lomp
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -fremap-arrays -fstrip-mining
-fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mrecip=none -fopenmp -DSPEC_OPENMP -pthread -lamdalloc -lamdlibm
-fopenmp=libomp -lomp
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Peak Optimization Flags

C benchmarks:

811.tealeaf_s: basepeak = yes

816.nab_s: basepeak = yes

881.neutron_s: basepeak = yes

C++ benchmarks:

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECspeed®2026_fp_base = 13.0

SPECspeed®2026_fp_peak = 13.0

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Peak Optimization Flags (Continued)

803.sph_exa_s: basepeak = yes

857.namd_s: basepeak = yes

867.nest_s: basepeak = yes

872.marian_s: basepeak = yes

Fortran benchmarks:

800.pot3d_s: basepeak = yes

820.cloverleaf_s: basepeak = yes

822.palm_s: basepeak = yes

849.fotonik3d_s: basepeak = yes

865.roms_s: basepeak = yes

Benchmarks using both C and C++:

809.cactus_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.html>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.xml>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-08 15:27:18-0500.

Report generated on 2026-05-04 23:33:22 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.