



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11


(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_int_base = 736

SPECrate®2026_int_peak = 736

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2026
Hardware Availability: Jun-2023
Software Availability: Jan-2026

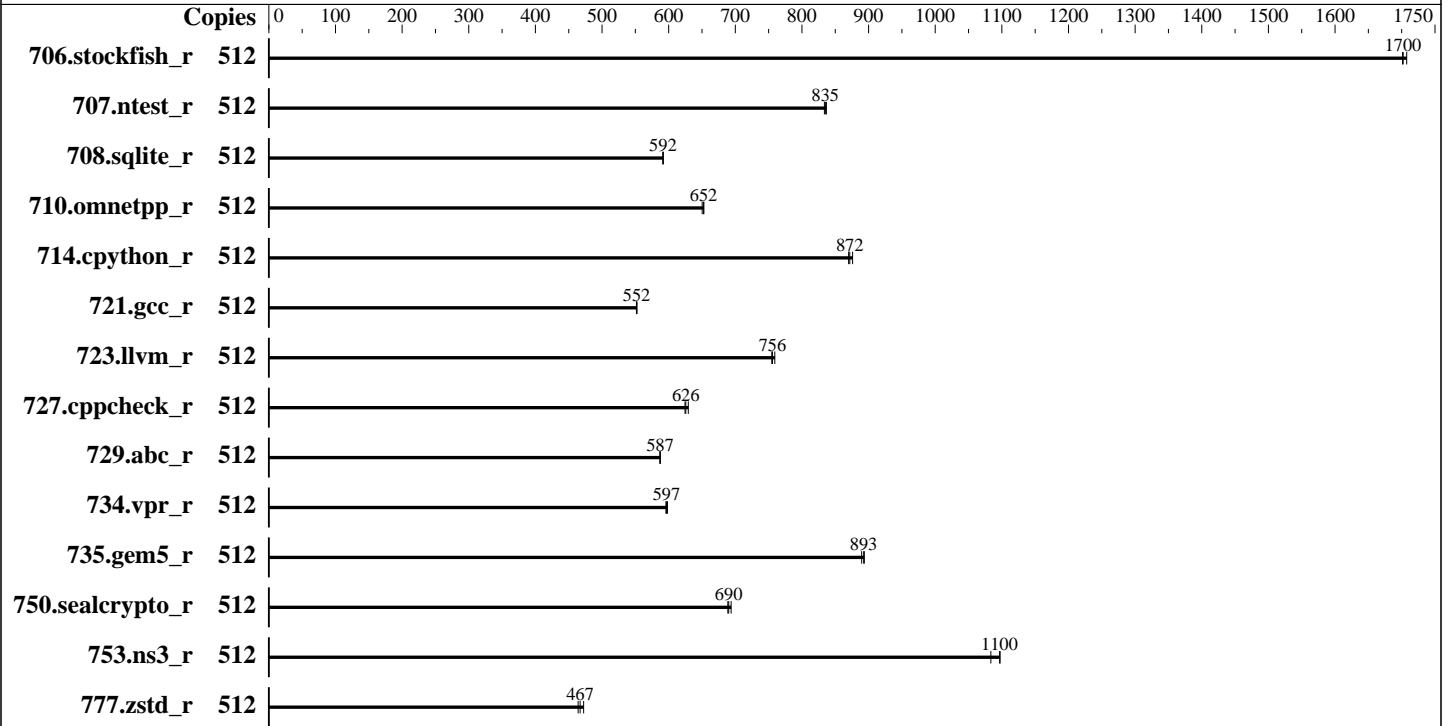

Hardware

CPU Name: AMD EPYC 9754
 Max MHz: 3100
 Nominal: 2250
 Enabled: 256 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 16 MB shared / 8 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 480 GB NVMe SSD
 Cooling: DLC
 Other: None

Software

OS: Ubuntu 24.04.3 LTS
 Kernel 6.8.0-90-generic
 Compiler: C/C++/Fortran: Version 5.1.0 of AOCC
 Compiler Category: Vendor
 Firmware: HPE BIOS Version v2.90
 released Jan-2026
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS is set to prefer performance at the cost of additional power usage



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_int_base = 736

SPECrate®2026_int_peak = 736

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2026
Hardware Availability: Jun-2023
Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
706.stockfish_r	512	378	1710	379	1700	379	1700	512	378	1710	379	1700	379	1700
707.ntest_r	512	364	834	362	837	363	835	512	364	834	362	837	363	835
708.sqlite_r	512	457	591	457	592	457	592	512	457	591	457	592	457	592
710.omnetpp_r	512	381	652	383	650	381	653	512	381	652	383	650	381	653
714.cpython_r	512	281	872	282	870	280	876	512	281	872	282	870	280	876
721.gcc_r	512	636	552	636	552	637	552	512	636	552	636	552	637	552
723.llvm_r	512	342	759	344	755	343	756	512	342	759	344	755	343	756
727.cppcheck_r	512	294	626	292	629	294	624	512	294	626	292	629	294	624
729.abc_r	512	400	587	400	587	400	587	512	400	587	400	587	400	587
734.vpr_r	512	396	596	395	598	395	597	512	396	596	395	598	395	597
735.gem5_r	512	280	890	279	893	279	894	512	280	890	279	893	279	894
750.sealcrypto_r	512	398	690	396	694	398	689	512	398	690	396	694	398	689
753.ns3_r	512	286	1100	290	1080	286	1100	512	286	1100	290	1080	286	1100
777.zstd_r	512	706	467	698	472	710	464	512	706	467	698	472	710	464

SPECrate®2026_int_base = 736

SPECrate®2026_int_peak = 736

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_int_base = 736

SPECrate®2026_int_peak = 736

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Operating System Notes (Continued)

To free node-local memory and avoid remote memory usage,
 'sysctl -w vm.zone_reclaim_mode=1' run as root.

To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.

To disable address space layout randomization (ASLR) to reduce run-to-run
 variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/cpu2026/amd_rate_aocc510_znver5_A_lib/lib:/home/cpu2026/amd_rate_
  aocc510_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB
 Memory using Ubuntu 24.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Throughput Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

ACPI CST C2 Latency set to 18 microseconds

NUMA memory domains per socket set to Four memory domains per socket

Thermal Configuration set to Maximum Cooling

Data Fabric C-State Enable set to Force Enabled

Last-Level Cache (LLC) as NUMA Node set to Enabled

Workload Profile set to Custom

Power Regulator set to OS Control Mode

Sysinfo program /home/cpu2026/bin/sysinfo

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_int_base = 736

SPECrate®2026_int_peak = 736

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

Rev: 069f95da7e7f5d81b2ce48a82150e54f
running on admin1 Fri Jan 30 11:52:23 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -srvm
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

1. uname -srvm
Linux 6.8.0-90-generic #91-Ubuntu SMP PREEMPT_DYNAMIC Tue Nov 18 14:14:30 UTC 2025 x86_64

2. w
11:52:23 up 5 min, 6 users, load average: 0.55, 0.21, 0.09

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
admin1		10.30.195.96	11:51	65days	0.00s	0.02s	sshd: admin1 [priv]
admin1		10.30.195.96	11:51	65days	0.00s	0.02s	sshd: admin1 [priv]
admin1		10.30.195.96	25Nov25	65days	0.00s	0.02s	sshd: admin1 [priv]
admin1		10.30.195.96	25Nov25	65days	0.00s	0.02s	sshd: admin1 [priv]
admin1		10.30.195.94	25Nov25	65days	0.00s	0.05s	sshd: admin1 [priv]
admin1		10.30.195.94	25Nov25	65days	0.00s	0.03s	sshd: admin1 [priv]

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_int_base = 736

SPECrate®2026_int_peak = 736

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

3. Username

```
From environment variable $USER:  root
From the command 'logname':      adminl
```

4. ulimit -a

```
time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)       0
memory(kbytes)         unlimited
locked memory(kbytes)  2097152
process                6190119
nofiles                1024
vmemory(kbytes)       unlimited
locks                  unlimited
rtprio                 0
```

5. sysinfo process ancestry

```
/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: adminl [priv]
sshd: adminl@notty
sudo $SPEC/intrate.sh
/bin/bash $SPEC/intrate.sh
sudo ./run_amd_rate_aocc510_znver5_A1.py
python3 ./run_amd_rate_aocc510_znver5_A1.py
/bin/bash ./amd_rate_aocc510_znver5_A1.sh
runcpu --config amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:rate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9754 128-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 160
stepping       : 1
microcode      : 0xaa00116
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_int_base = 736

SPECrate®2026_int_peak = 736

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

```

bugs                : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso vmscape
TLB size           : 3584 4K pages
cpu cores          : 128
siblings           : 256
2 physical ids (chips)
512 processors (hardware threads)
physical id 0: core ids 0-127
physical id 1: core ids 0-127
physical id 0: apicids 0-255
physical id 1: apicids 256-511

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                512
On-line CPU(s) list:   0-511
Vendor ID:             AuthenticAMD
BIOS Vendor ID:        Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9754 128-Core Processor
BIOS Model name:       AMD EPYC 9754 128-Core Processor          CPU @ 2.2GHz
BIOS CPU family:       107
CPU family:            25
Model:                 160
Thread(s) per core:    2
Core(s) per socket:    128
Socket(s):             2
Stepping:              1
Frequency boost:       enabled
CPU(s) scaling MHz:    101%
CPU max MHz:           2250.0000
CPU min MHz:           1500.0000
BogoMIPS:              4493.33

```

```

Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2

```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_int_base = 736

SPECrate®2026_int_peak = 736

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2026
Hardware Availability: Jun-2023
Software Availability: Jan-2026

Platform Notes (Continued)

ibrs ibpb stibp ibrs_enhanced vmcall fsgsbase bmi1 avx2 smep bmi2
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
amd_ppin cpc amd_ibpb_ret arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
debug_swap ibpb_exit_to_user

Virtualization: AMD-V
L1d cache: 8 MiB (256 instances)
L1i cache: 8 MiB (256 instances)
L2 cache: 256 MiB (256 instances)
L3 cache: 512 MiB (32 instances)
NUMA node(s): 32
NUMA node0 CPU(s): 0-7,256-263
NUMA node1 CPU(s): 8-15,264-271
NUMA node2 CPU(s): 16-23,272-279
NUMA node3 CPU(s): 24-31,280-287
NUMA node4 CPU(s): 32-39,288-295
NUMA node5 CPU(s): 40-47,296-303
NUMA node6 CPU(s): 48-55,304-311
NUMA node7 CPU(s): 56-63,312-319
NUMA node8 CPU(s): 64-71,320-327
NUMA node9 CPU(s): 72-79,328-335
NUMA node10 CPU(s): 80-87,336-343
NUMA node11 CPU(s): 88-95,344-351
NUMA node12 CPU(s): 96-103,352-359
NUMA node13 CPU(s): 104-111,360-367
NUMA node14 CPU(s): 112-119,368-375
NUMA node15 CPU(s): 120-127,376-383
NUMA node16 CPU(s): 128-135,384-391
NUMA node17 CPU(s): 136-143,392-399
NUMA node18 CPU(s): 144-151,400-407
NUMA node19 CPU(s): 152-159,408-415
NUMA node20 CPU(s): 160-167,416-423
NUMA node21 CPU(s): 168-175,424-431
NUMA node22 CPU(s): 176-183,432-439
NUMA node23 CPU(s): 184-191,440-447
NUMA node24 CPU(s): 192-199,448-455
NUMA node25 CPU(s): 200-207,456-463
NUMA node26 CPU(s): 208-215,464-471
NUMA node27 CPU(s): 216-223,472-479
NUMA node28 CPU(s): 224-231,480-487
NUMA node29 CPU(s): 232-239,488-495

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_int_base = 736

SPECrate®2026_int_peak = 736

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

NUMA node30 CPU(s): 240-247,496-503
 NUMA node31 CPU(s): 248-255,504-511
 Vulnerability Gather data sampling: Not affected
 Vulnerability Itlb multihit: Not affected
 Vulnerability L1tf: Not affected
 Vulnerability Mds: Not affected
 Vulnerability Meltdown: Not affected
 Vulnerability Mmio stale data: Not affected
 Vulnerability Reg file data sampling: Not affected
 Vulnerability Retbleed: Not affected
 Vulnerability Spec rstack overflow: Mitigation; Safe RET
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
 Vulnerability Spectre v1: Mitigation; usercopy/swappgs barriers and __user pointer sanitization
 Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
 always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
 Vulnerability Srbds: Not affected
 Vulnerability Tsx async abort: Not affected
 Vulnerability Vmscape: Mitigation; IBPB before exit to userspace

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	8M	8	Data	1	64	1	64
L1i	32K	8M	8	Instruction	1	64	1	64
L2	1M	256M	8	Unified	2	2048	1	64
L3	16M	512M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 32 nodes (0-31)
 node 0 cpus: 0-7,256-263
 node 0 size: 47999 MB
 node 0 free: 47141 MB
 node 1 cpus: 8-15,264-271
 node 1 size: 48378 MB
 node 1 free: 48170 MB
 node 2 cpus: 16-23,272-279
 node 2 size: 48378 MB
 node 2 free: 48199 MB
 node 3 cpus: 24-31,280-287
 node 3 size: 48378 MB
 node 3 free: 48171 MB
 node 4 cpus: 32-39,288-295
 node 4 size: 48378 MB
 node 4 free: 48141 MB
 node 5 cpus: 40-47,296-303
 node 5 size: 48378 MB

(Continued on next page)



SPEC

SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_int_base = 736

SPECrate®2026_int_peak = 736

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

```

node 5 free: 48194 MB
node 6 cpus: 48-55,304-311
node 6 size: 48378 MB
node 6 free: 48192 MB
node 7 cpus: 56-63,312-319
node 7 size: 48378 MB
node 7 free: 48175 MB
node 8 cpus: 64-71,320-327
node 8 size: 48378 MB
node 8 free: 48203 MB
node 9 cpus: 72-79,328-335
node 9 size: 48378 MB
node 9 free: 48186 MB
node 10 cpus: 80-87,336-343
node 10 size: 48378 MB
node 10 free: 48184 MB
node 11 cpus: 88-95,344-351
node 11 size: 48378 MB
node 11 free: 48196 MB
node 12 cpus: 96-103,352-359
node 12 size: 48378 MB
node 12 free: 48172 MB
node 13 cpus: 104-111,360-367
node 13 size: 48378 MB
node 13 free: 48205 MB
node 14 cpus: 112-119,368-375
node 14 size: 48378 MB
node 14 free: 48190 MB
node 15 cpus: 120-127,376-383
node 15 size: 48335 MB
node 15 free: 48123 MB
node 16 cpus: 128-135,384-391
node 16 size: 48378 MB
node 16 free: 48189 MB
node 17 cpus: 136-143,392-399
node 17 size: 48378 MB
node 17 free: 48181 MB
node 18 cpus: 144-151,400-407
node 18 size: 48378 MB
node 18 free: 48157 MB
node 19 cpus: 152-159,408-415
node 19 size: 48378 MB
node 19 free: 48184 MB
node 20 cpus: 160-167,416-423
node 20 size: 48378 MB
node 20 free: 48185 MB
node 21 cpus: 168-175,424-431

```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_int_base = 736

SPECrate®2026_int_peak = 736

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

```

node 21 size: 48378 MB
node 21 free: 48147 MB
node 22 cpus: 176-183,432-439
node 22 size: 48378 MB
node 22 free: 48173 MB
node 23 cpus: 184-191,440-447
node 23 size: 48378 MB
node 23 free: 48186 MB
node 24 cpus: 192-199,448-455
node 24 size: 48378 MB
node 24 free: 48177 MB
node 25 cpus: 200-207,456-463
node 25 size: 48378 MB
node 25 free: 48121 MB
node 26 cpus: 208-215,464-471
node 26 size: 48378 MB
node 26 free: 48174 MB
node 27 cpus: 216-223,472-479
node 27 size: 48378 MB
node 27 free: 48173 MB
node 28 cpus: 224-231,480-487
node 28 size: 48378 MB
node 28 free: 48134 MB
node 29 cpus: 232-239,488-495
node 29 size: 48378 MB
node 29 free: 48156 MB
node 30 cpus: 240-247,496-503
node 30 size: 48378 MB
node 30 free: 48179 MB
node 31 cpus: 248-255,504-511
node 31 size: 48301 MB
node 31 free: 48094 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
0: 10 11 11 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
1: 11 10 11 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
2: 11 11 10 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
3: 11 11 11 10 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
4: 12 12 12 12 10 11 11 11 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32
5: 12 12 12 12 11 10 11 11 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32
32 32 32 32 32 32 32

```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_int_base = 736

SPECrate®2026_int_peak = 736

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2026
Hardware Availability: Jun-2023
Software Availability: Jan-2026

Platform Notes (Continued)

6: 12 12 12 12 11 11 10 11 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32

7: 12 12 12 12 11 11 11 10 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32

8: 12 12 12 12 12 12 12 12 10 11 11 11 12 12 12 12 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32

9: 12 12 12 12 12 12 12 12 11 10 11 11 12 12 12 12 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32

10: 12 12 12 12 12 12 12 12 11 11 10 11 12 12 12 12 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32

11: 12 12 12 12 12 12 12 12 11 11 11 10 12 12 12 12 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32

12: 12 12 12 12 12 12 12 12 12 12 12 12 10 11 11 11 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32

13: 12 12 12 12 12 12 12 12 12 12 12 12 11 10 11 11 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32

14: 12 12 12 12 12 12 12 12 12 12 12 12 11 11 10 11 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32

15: 12 12 12 12 12 12 12 12 12 12 12 12 11 11 11 10 32 32 32 32 32 32 32 32
 32 32 32 32 32 32 32

16: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 10 11 11 11 12 12 12 12
 12 12 12 12 12 12 12

17: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 10 11 11 12 12 12 12
 12 12 12 12 12 12 12

18: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 10 11 12 12 12 12
 12 12 12 12 12 12 12

19: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 10 12 12 12 12
 12 12 12 12 12 12 12

20: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 10 11 11 11
 12 12 12 12 12 12 12

21: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 11 10 11 11
 12 12 12 12 12 12 12

22: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 11 11 10 11
 12 12 12 12 12 12 12

23: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 11 11 11 10
 12 12 12 12 12 12 12

24: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 10
 11 11 11 12 12 12 12

25: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 11
 10 11 11 12 12 12 12

26: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 11
 11 10 11 12 12 12 12

27: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 11
 11 11 10 12 12 12 12

28: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12
 12 12 12 10 11 11 11

29: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_int_base = 736

SPECrate®2026_int_peak = 736

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2026
Hardware Availability: Jun-2023
Software Availability: Jan-2026

Platform Notes (Continued)

```

12 12 12 11 10 11 11
30: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12
12 12 12 11 11 10 11
31: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12
12 12 12 11 11 11 10

```

```

-----
9. /proc/meminfo
   MemTotal:          1584752404 kB

```

```

-----
10. who -r
    run-level 5 Nov 25 18:16

```

```

-----
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)
    Default Target   Status
    graphical        running

```

```

-----
12. Services, from systemctl list-unit-files
    STATE                UNIT FILES
    enabled              ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init
                           cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                           grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd
                           networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
                           snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore
                           systemd-resolved thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw
                           unattended-upgrades vgauth
    enabled-runtime      netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
    disabled             console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
                           systemd-boot-check-no-failures systemd-confext systemd-network-generator
                           systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
                           systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
                           systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysex
                           systemd-time-wait-sync systemd-timesyncd upower
    indirect             systemd-sysupdate systemd-sysupdate-reboot uidd
    masked               cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-6.8.0-90-generic
    root=UUID=60685607-d408-4b5d-9478-a6a431e11442
    ro

```

```

-----
14. cpupower frequency-info

```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_int_base = 736

SPECrate®2026_int_peak = 736

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

analyzing CPU 220:

current policy: frequency should be within 1.50 GHz and 2.25 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

Boost States: 0

Total States: 3

Pstate-P0: 2250MHz

15. tuned-adm active

Current active profile: balanced

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

17. /sys/kernel/mm/transparent_hugepage

defrag [always] defer defer+madvice madvice never

enabled [always] madvice never

hpage_pmd_size 2097152

shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs 60000

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_int_base = 736

SPECrate®2026_int_peak = 736

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Platform Notes (Continued)

```

defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

19. OS release

```

From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS

```

20. Disk information

SPEC is set to: /home/cpu2026

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  439G   51G  366G  13% /

```

21. /sys/devices/virtual/dmi/id

```

Vendor:          HPE
Product:         ProLiant DL385 Gen11
Product Family: ProLiant
Serial:         DL385G11-003

```

22. dmidecode

Additional information from dmidecode 3.5 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```

11x Hynix HMCG94AEBRA103N 64 GB 2 rank 4800
1x Hynix HMCG94AEBRA109N 64 GB 2 rank 4800
5x Hynix HMCG94AEBRA123N 64 GB 2 rank 4800
7x Hynix HMCG94MEBRA121N 64 GB 2 rank 4800

```

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```

BIOS Vendor:      HPE
BIOS Version:     2.90
BIOS Date:        01/09/2026
BIOS Revision:    2.90
Firmware Revision: 1.63

```



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_int_base = 736

SPECrate®2026_int_peak = 736

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Compiler Version Notes

=====
C | 708.sqlite_r(base) 714.cpython_r(base) 777.zstd_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====
C++ | 706.stockfish_r(base) 707.ntest_r(base) 727.cppcheck_r(base)
753.ns3_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

=====
C++, C | 710.omnetpp_r(base) 721.gcc_r(base) 723.llvm_r(base) 729.abc_r(base)
734.vpr_r(base) 735.gem5_r(base) 750.sealcrypto_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Benchmarks using both C and C++:

clang++ clang

Base Portability Flags

706.stockfish_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_int_base = 736

SPECrate®2026_int_peak = 736

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Base Portability Flags (Continued)

```

707.ntest_r: -DSPEC_LP64
708.sqlite_r: -DSPEC_LP64
710.omnetpp_r: -DSPEC_LP64
714.cpython_r: -DSPEC_LP64
721.gcc_r: -DSPEC_LP64
723.llvm_r: -DSPEC_LP64
727.cppcheck_r: -DSPEC_LP64
729.abc_r: -DSPEC_LP64
734.vpr_r: -DSPEC_LP64
735.gem5_r: -DSPEC_LP64
750.sealcrypto_r: -DSPEC_LP64
753.ns3_r: -DSPEC_LP64
777.zstd_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -O3 -march=znver5 -fveclib=AMDLIBM
-fno-PIE -no-pie -flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc

```

C++ benchmarks:

```

-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc

```

Benchmarks using both C and C++:

```

-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -fno-PIE -no-pie -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -lflang -lamdalloc

```



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_int_base = 736

SPECrate®2026_int_peak = 736

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

Peak Optimization Flags

C benchmarks:

708.sqlite_r: basepeak = yes

714.cpython_r: basepeak = yes

777.zstd_r: basepeak = yes

C++ benchmarks:

706.stockfish_r: basepeak = yes

707.ntest_r: basepeak = yes

727.cppcheck_r: basepeak = yes

753.ns3_r: basepeak = yes

Benchmarks using both C and C++:

710.omnetpp_r: basepeak = yes

721.gcc_r: basepeak = yes

723.llvm_r: basepeak = yes

729.abc_r: basepeak = yes

734.vpr_r: basepeak = yes

735.gem5_r: basepeak = yes

750.sealcrypto_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.html>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.xml>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.xml>



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.25 GHz, AMD EPYC 9754)

SPECrate®2026_int_base = 736

SPECrate®2026_int_peak = 736

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jun-2023

Software Availability: Jan-2026

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-01-30 06:52:22-0500.
Report generated on 2026-05-11 16:38:24 by CPU2026 PDF formatter (unknown).
Originally published on 2026-05-05.