



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2026\_int\_base = 6.37

ThinkSystem SR655 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2026\_int\_peak = 6.37

CPU2026 License: 9017


Test Date: Feb-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2023

Tested by: Lenovo Global Technology

Software Availability: Jan-2026

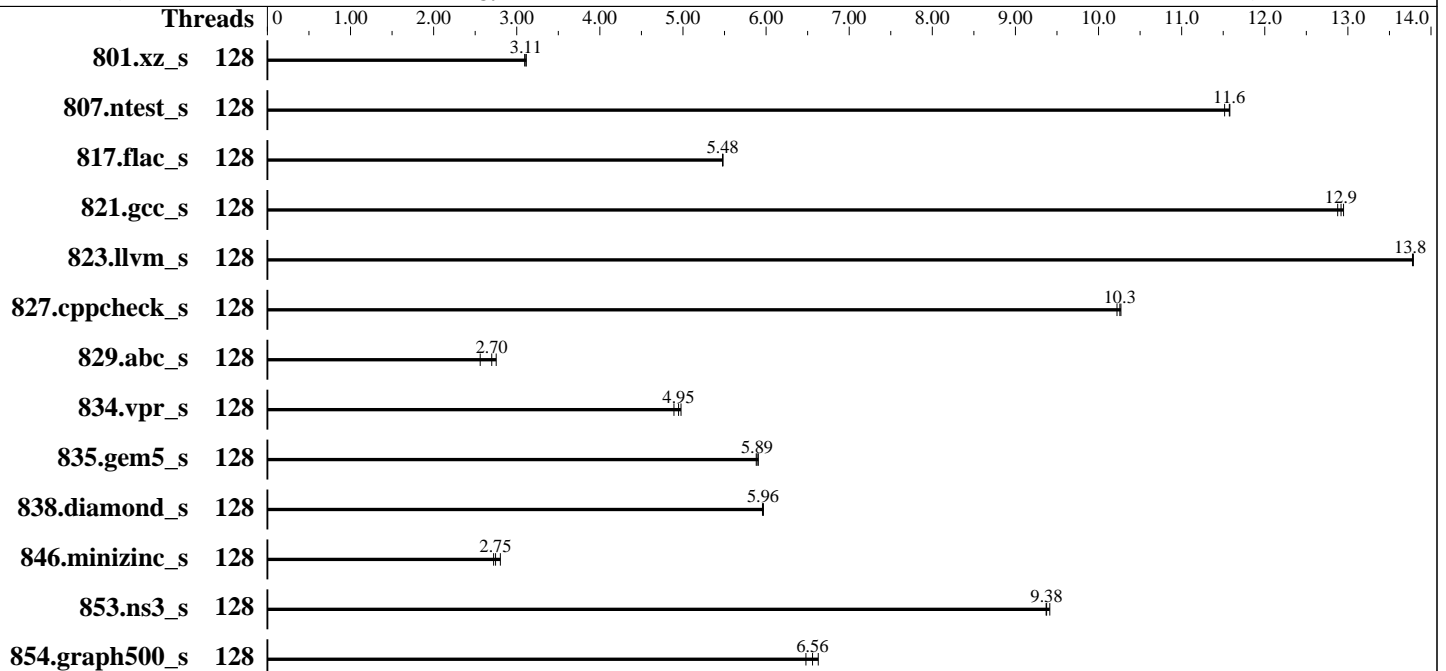

### Hardware

CPU Name: AMD EPYC 9575F  
 Max MHz: 5000  
 Nominal: 3300  
 Enabled: 64 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 8 cores  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx8 PC5-6400B-R)  
 Storage: 1 x 480 GB SATA SSD  
 Cooling: Air  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP7  
 Kernel 6.4.0-150700.51-default  
 Compiler: C/C++: Version 5.1.0 of AOCC  
 Fortran: Flang v22  
 Compiler Category: Vendor  
 Firmware: Lenovo BIOS Version KAE141G 5.81 released Jan-2026  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2026\_int\_base = 6.37

SPECspeed®2026\_int\_peak = 6.37

CPU2026 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Feb-2026  
Hardware Availability: Aug-2023  
Software Availability: Jan-2026

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
801.xz_s	128	<b>190</b>	<b>3.11</b>	190	3.11	191	3.09	128	<b>190</b>	<b>3.11</b>	190	3.11	191	3.09
807.nctest_s	128	<b>98.5</b>	<b>11.6</b>	99.0	11.5	98.4	11.6	128	<b>98.5</b>	<b>11.6</b>	99.0	11.5	98.4	11.6
817.flac_s	128	<b>317</b>	<b>5.48</b>	317	5.48	317	5.48	128	<b>317</b>	<b>5.48</b>	317	5.48	317	5.48
821.gcc_s	128	160	12.9	<b>160</b>	<b>12.9</b>	161	12.9	128	160	12.9	<b>160</b>	<b>12.9</b>	161	12.9
823.llvm_s	128	<b>102</b>	<b>13.8</b>	102	13.8	102	13.8	128	<b>102</b>	<b>13.8</b>	102	13.8	102	13.8
827.cppcheck_s	128	109	10.3	<b>109</b>	<b>10.3</b>	109	10.2	128	109	10.3	<b>109</b>	<b>10.3</b>	109	10.2
829.abc_s	128	325	2.56	<b>308</b>	<b>2.70</b>	302	2.75	128	325	2.56	<b>308</b>	<b>2.70</b>	302	2.75
834.vpr_s	128	<b>193</b>	<b>4.95</b>	192	4.98	195	4.89	128	<b>193</b>	<b>4.95</b>	192	4.98	195	4.89
835.gem5_s	128	<b>193</b>	<b>5.89</b>	194	5.88	193	5.91	128	<b>193</b>	<b>5.89</b>	194	5.88	193	5.91
838.diamond_s	128	<b>168</b>	<b>5.96</b>	168	5.97	168	5.96	128	<b>168</b>	<b>5.96</b>	168	5.97	168	5.96
846.minizinc_s	128	246	2.72	239	2.80	<b>244</b>	<b>2.75</b>	128	246	2.72	239	2.80	<b>244</b>	<b>2.75</b>
853.ns3_s	128	123	9.37	<b>123</b>	<b>9.38</b>	122	9.41	128	123	9.37	<b>123</b>	<b>9.38</b>	122	9.41
854.graph500_s	128	94.3	6.48	92.2	6.63	<b>93.2</b>	<b>6.56</b>	128	94.3	6.48	92.2	6.63	<b>93.2</b>	<b>6.56</b>

SPECspeed®2026\_int\_base = **6.37**

SPECspeed®2026\_int\_peak = **6.37**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>  
Flang v22 is available at  
<https://flang.llvm.org/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2026\_int\_base = 6.37

ThinkSystem SR655 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2026\_int\_peak = 6.37

CPU2026 License: 9017

Test Date: Feb-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2023

Tested by: Lenovo Global Technology

Software Availability: Jan-2026

### Operating System Notes (Continued)

```
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

### Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-127"
LD_LIBRARY_PATH =
"/home/cpu2026-0.902.0-amd_aocc510_znver5_A1/amd_speed_aocc510_flang22_z
nver5_A_lib/lib:/home/cpu2026-0.902.0-amd_aocc510_znver5_A1/amd_speed_ao
cc510_flang22_znver5_A_lib/lib32:"
MALLOCONF = "retain:true"
```

### General Notes

Binaries were compiled on a system with an AMD EPYC 9754 CPU + 768 GiB Memory using Ubuntu 24.04

### Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance
NUMA Nodes per Socket set to NPS4

Sysinfo program /home/cpu2026-0.902.0-amd_aocc510_znver5_A1/bin/sysinfo
Rev: 069f95da7e7f5d81b2ce48a82150e54f
running on localhost Fri Feb 6 05:27:04 2026
```

SUT (System Under Test) info as seen by some common utilities.

```
-----
Table of contents
-----
```

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2026\_int\_base = 6.37

ThinkSystem SR655 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2026\_int\_peak = 6.37

CPU2026 License: 9017

Test Date: Feb-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2023

Tested by: Lenovo Global Technology

Software Availability: Jan-2026

### Platform Notes (Continued)

- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent\_hugepage
- 17. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
-----
1. uname -srvm
Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64
-----
```

```
-----
2. w
05:27:04 up 3 min, 1 user, load average: 0.03, 0.09, 0.04
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
-----
```

```
-----
3. Username
From environment variable $USER: root
-----
```

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 1545866
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 1545866
-----
```

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2026\_int\_base = 6.37

ThinkSystem SR655 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2026\_int\_peak = 6.37

CPU2026 License: 9017

Test Date: Feb-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2023

Tested by: Lenovo Global Technology

Software Availability: Jan-2026

### Platform Notes (Continued)

virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

#### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECCpu_1.01.sh
/bin/bash ./Run032-compliant-amd-speedint_base.sh
python3 ./run_amd_speed_aocc510_flang22_znver5_A1.py
/bin/bash ./amd_speed_aocc510_flang22_znver5_A1.sh
runcpu --config amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 3 intspeed
runcpu --configfile amd_speed_aocc510_flang22_znver5_A1.cfg --tune base --reportable --iterations 3
--nopower --runmode speed --tune base --size test:train:refspeed intspeed --nopreenv --note-preenv
--logfile $SPEC/tmp/CPU2026.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026-0.902.0-amd_aocc510_znver5_A1

```

#### 6. /proc/cpuinfo

```

model name      : AMD EPYC 9575F 64-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb002152
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size      : 192 4K pages
cpu cores      : 64
siblings       : 128
1 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-63
physical id 0: apicids 0-127

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.40.4:

```

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian

```

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2026\_int\_base = 6.37

ThinkSystem SR655 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2026\_int\_peak = 6.37

CPU2026 License: 9017

Test Date: Feb-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2023

Tested by: Lenovo Global Technology

Software Availability: Jan-2026

### Platform Notes (Continued)

```

CPU(s): 128
On-line CPU(s) list: 0-127
Vendor ID: AuthenticAMD
Model name: AMD EPYC 9575F 64-Core Processor
CPU family: 26
Model: 2
Thread(s) per core: 2
Core(s) per socket: 64
Socket(s): 1
Stepping: 1
BogoMIPS: 6590.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpxt
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
vnni avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_l1d debug_swap hv_inuse_wr_allowed srso_user_kernel_no
amd_lbr_pmc_freeze
Virtualization: AMD-V
L1d cache: 3 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 64 MiB (64 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-15,64-79
NUMA node1 CPU(s): 16-31,80-95
NUMA node2 CPU(s): 32-47,96-111
NUMA node3 CPU(s): 48-63,112-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected

```

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2026\_int\_base = 6.37

ThinkSystem SR655 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2026\_int\_peak = 6.37

CPU2026 License: 9017

Test Date: Feb-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2023

Tested by: Lenovo Global Technology

Software Availability: Jan-2026

### Platform Notes (Continued)

Vulnerability Mmio stale data: Not affected  
 Vulnerability Reg file data sampling: Not affected  
 Vulnerability Retbleed: Not affected  
 Vulnerability Spec rstack overflow: Mitigation; IBPB on VMEXIT only  
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
 Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP  
 always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected  
 Vulnerability Srbds: Not affected  
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-15,64-79
node 0 size: 96343 MB
node 0 free: 95971 MB
node 1 cpus: 16-31,80-95
node 1 size: 96759 MB
node 1 free: 96275 MB
node 2 cpus: 32-47,96-111
node 2 size: 96720 MB
node 2 free: 96381 MB
node 3 cpus: 48-63,112-127
node 3 size: 96669 MB
node 3 free: 96180 MB
node distances:
node  0  1  2  3
0:  10 12 12 12
1:  12 10 12 12
2:  12 12 10 12
3:  12 12 12 10
```

9. /proc/meminfo

MemTotal: 395769216 kB

10. who -r

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2026\_int\_base = 6.37

SPECspeed®2026\_int\_peak = 6.37

**CPU2026 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2026  
**Hardware Availability:** Aug-2023  
**Software Availability:** Jan-2026

### Platform Notes (Continued)

run-level 3 Feb 6 05:24

-----  
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)  
Default Target Status  
multi-user running

-----  
12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator  
kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd  
systemd-pstore wickedd wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info  
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys  
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd  
serial-getty@ smartd\_generate\_opts snmpd snmptrapd systemd-boot-check-no-failures  
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync  
systemd-timesyncd  
indirect systemd-userdbd wickedd

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default  
root=UUID=4df3f727-89e5-4ce6-88a6-a45582f0d203  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

-----  
14. cpupower frequency-info  
analyzing CPU 75:  
Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes

-----  
15. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 0  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2026\_int\_base = 6.37

ThinkSystem SR655 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2026\_int\_peak = 6.37

CPU2026 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2026

Hardware Availability: Aug-2023

Software Availability: Jan-2026

### Platform Notes (Continued)

```

vm.dirty_bytes          0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio         8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold   500
vm.min_unmapped_ratio  1
vm.nr_hugepages        0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness          1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode   1

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none        511
max_ptes_shared      256
max_ptes_swap        64
pages_to_scan        4096
scan_sleep_millisecs 10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2026-0.902.0-amd_aocc510_znver5_A1
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   446G  91G  355G  21% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:      Lenovo
Product:     ThinkSystem SR655V3

```

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2026\_int\_base = 6.37

ThinkSystem SR655 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2026\_int\_peak = 6.37

**CPU2026 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2026  
**Hardware Availability:** Aug-2023  
**Software Availability:** Jan-2026

### Platform Notes (Continued)

Product Family: ThinkSystem  
Serial: 1234567890

#### 21. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

4x SK Hynix HMC88AHBRA471N 32 GB 2 rank 6400  
2x SK Hynix HMC88AHBRA472N 32 GB 2 rank 6400  
1x SK Hynix HMC88AHBRA477N 32 GB 2 rank 6400  
5x SK Hynix HMC88AHBRA478N 32 GB 2 rank 6400

#### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo  
BIOS Version: KAE141G-5.81  
BIOS Date: 01/22/2026  
BIOS Revision: 5.81  
Firmware Revision: 56.20

### Compiler Version Notes

C | 854.graph500\_s(base)

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

C++ | 807.ntest\_s(base) 827.cppcheck\_s(base) 853.ns3\_s(base)

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2026\_int\_base = 6.37

ThinkSystem SR655 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2026\_int\_peak = 6.37

CPU2026 License: 9017

Test Date: Feb-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2023

Tested by: Lenovo Global Technology

Software Availability: Jan-2026

### Compiler Version Notes (Continued)

C++, C		801.xz_s(base)	817.flac_s(base)	821.gcc_s(base)	823.llvm_s(base)
		829.abc_s(base)	834.vpr_s(base)	835.gem5_s(base)	838.diamond_s(base)
		846.minizinc_s(base)			

AMD clang version 17.0.6 (CLANG: AOCC\_5.1.0-Build#1994 2025\_12\_23)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

### Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Benchmarks using both C and C++:

clang++ clang

### Base Portability Flags

```

801.xz_s: -DSPEC_LP64
807.ntest_s: -DSPEC_LP64
817.flac_s: -DSPEC_LP64
821.gcc_s: -DSPEC_LP64
823.llvm_s: -DSPEC_LP64
827.cppcheck_s: -DSPEC_LP64
829.abc_s: -DSPEC_LP64
834.vpr_s: -fno-finite-math-only -DSPEC_LP64
835.gem5_s: -fno-finite-math-only -DSPEC_LP64
838.diamond_s: -DSPEC_LP64
846.minizinc_s: -DSPEC_LP64
853.ns3_s: -fno-finite-math-only -DSPEC_LP64
854.graph500_s: -DSPEC_LP64

```

### Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2026\_int\_base = 6.37

ThinkSystem SR655 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2026\_int\_peak = 6.37

CPU2026 License: 9017

Test Date: Feb-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2023

Tested by: Lenovo Global Technology

Software Availability: Jan-2026

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3 -flto
-march=znver5 -fveclib=AMDLIBM -ffast-math -zopt -fremap-arrays
-fstrip-mining -fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50
-fopenmp -DSPEC_OPENMP -lamdalloc -lamdlibm -fopenmp=libomp -lomp
```

C++ benchmarks:

```
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -fopenmp -DSPEC_OPENMP
-fvirtual-function-elimination -fvisibility=hidden -lamdalloc
-lamdlibm -fopenmp=libomp -lomp
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -flto -march=znver5
-fveclib=AMDLIBM -ffast-math -zopt -fremap-arrays -fstrip-mining
-fstruct-layout=7 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-fopenmp -DSPEC_OPENMP -fvirtual-function-elimination
-fvisibility=hidden -lamdalloc -lamdlibm -fopenmp=libomp -lomp
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type
```

Benchmarks using both C and C++:

```
-Wno-return-type
```

## Peak Optimization Flags

C benchmarks:

(Continued on next page)



# SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2026\_int\_base = 6.37

ThinkSystem SR655 V3  
(3.30 GHz, AMD EPYC 9575F)

SPECspeed®2026\_int\_peak = 6.37

CPU2026 License: 9017

Test Date: Feb-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2023

Tested by: Lenovo Global Technology

Software Availability: Jan-2026

## Peak Optimization Flags (Continued)

854.graph500\_s: basepeak = yes

C++ benchmarks:

807.ntest\_s: basepeak = yes

827.cppcheck\_s: basepeak = yes

853.ns3\_s: basepeak = yes

Benchmarks using both C and C++:

801.xz\_s: basepeak = yes

817.flac\_s: basepeak = yes

821.gcc\_s: basepeak = yes

823.llvm\_s: basepeak = yes

829.abc\_s: basepeak = yes

834.vpr\_s: basepeak = yes

835.gem5\_s: basepeak = yes

838.diamond\_s: basepeak = yes

846.minizinc\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Lenovo-Platform-SPECcpu-Flags-V1.2-Turin-M.html>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Lenovo-Platform-SPECcpu-Flags-V1.2-Turin-M.xml>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-05 16:27:03-0500.

Report generated on 2026-05-04 23:34:02 by CPU2026 PDF formatter (unknown).

Originally published on 2026-05-05.