



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR850 V4 (2.50 GHZ, Intel Xeon 6748P)

SPECspeed®2026_fp_base =	6.26
SPECspeed®2026_fp_energy_base =	1.18
SPECspeed®2026_fp_peak =	Not Run
SPECspeed®2026_fp_energy_peak =	Not Run

CPU2026 License: 9017


Test Date: Feb-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2025

Tested by: Lenovo Global Technology

Software Availability: Jan-2026

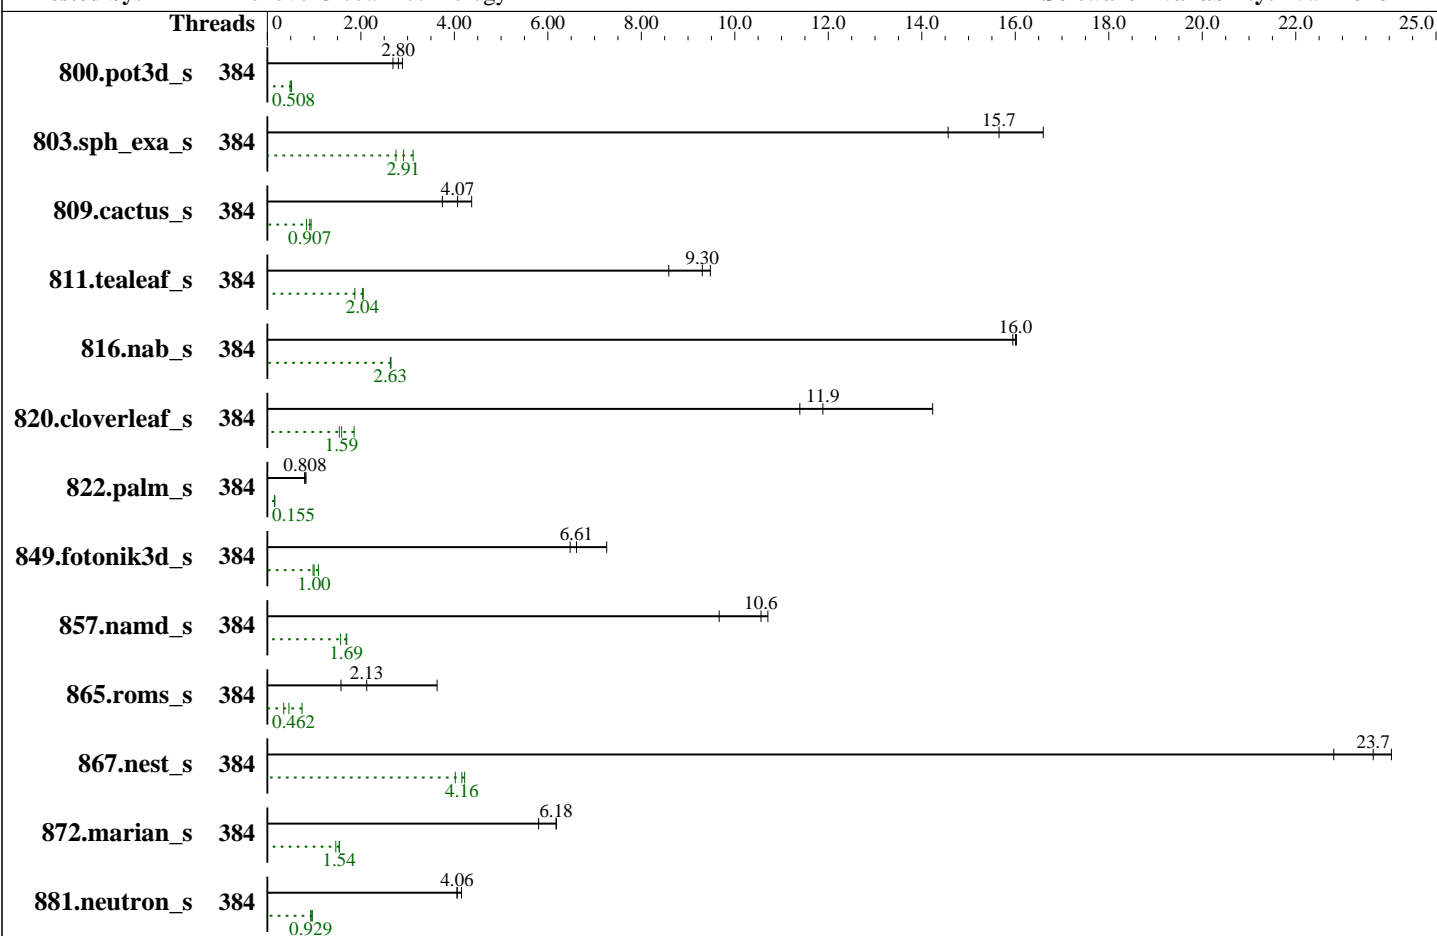

Hardware

CPU Name: Intel Xeon 6748P
 Max MHz: 4100
 Nominal: 2500
 Enabled: 192 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 192 MB I+D on chip per chip
 Other: None
 Memory: 2 TB (32 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 1 x 960 GB M.2 NVMe SSD
 Cooling: Air
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP7
 Kernel 6.4.0-150700.51-default
 Compiler: C/C++: Version 2025.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2025.3 of Intel Fortran Compiler for Linux
 Compiler Category: Vendor
 Firmware: BIOS Version RVE105I 1.20 released Dec-2025
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator v5.3
 Power Management: BIOS set to balance power and performance



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR850 V4 (2.50 GHZ, Intel Xeon 6748P)

SPECspeed®2026_fp_base = 6.26
SPECspeed®2026_fp_energy_base = 1.18
SPECspeed®2026_fp_peak = Not Run
SPECspeed®2026_fp_energy_peak = Not Run

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Nov-2025
Software Availability: Jan-2026

Power

Max. Power (W): 1545.0
Idle Power (W): 384.96
Min. Temperature (C): 22.38
Elevation (m): 43
Line Standard: 220 V / 50 Hz / 1 phase / 3 wires
Provisioning: Line-powered

Power Settings

Management FW: Version 2.00 of IHX427H
Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 2 x 2000 W (redundant)
Details: ThinkSystem 2000W 230V Titanium CRPS Hot-Swap
Backplane: M.2 SATA/NVMe Drive Assembly Kit
Other Storage: None
Storage Model #: 4XB7A13999
NICs Installed: 1 x ThinkSystem Ethernet 2-port Adaptor @ 10 Gb
NICs Enabled (FW/OS): 2 / 1
NICs Connected/Speed: 1 @ 10 Gb
Other HW Model #: 6 x Performance fans

Power Analyzer

Power Analyzer: WIN:9888
Hardware Vendor: YOKOGAWA, Inc.
Model: YokogawaWT310E
Serial Number: C3SH31009E
Input Connection: Default
Metrology Institute: CNAS
Calibration By: CEPREI Calibration and Testing Centre
Calibration Label: 1GA25011731-0001
Calibration Date: 15-Sep-2025
PTDaemon® Version: 1.11.1 (462c978e; 2024-09-07)
Setup Description: Connected to PSU1
Current Ranges Used: 10A
Voltage Range Used: 300V

Temperature Meter

Temperature Meter: WIN:9889
Hardware Vendor: Digi International, Inc.
Model: DigiWATCHPORT_H
Serial Number: W63181846
Input Connection: USB
PTDaemon Version: 1.11.1 (462c978e; 2024-09-07)
Setup Description: 50 mm in front of SUT main intake

Base Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
800.pot3d_s	384	233	2.89	243	0.519	1040	1240	240	2.80	248	0.508	1030	1120	250	2.69	259	0.488	1030	1110
803.sph_exa_s	384	79.1	15.7	71.9	2.91	910	1320	85.0	14.6	76.2	2.75	896	1240	74.6	16.6	67.2	3.12	901	1290
809.cactus_s	384	276	4.07	223	0.907	810	947	300	3.74	241	0.839	805	946	257	4.37	216	0.936	843	983
811.tealeaf_s	384	58.8	9.48	68.1	2.05	1160	1200	59.9	9.30	68.5	2.04	1140	1210	64.9	8.59	74.6	1.87	1150	1220
816.nab_s	384	70.3	16.0	73.2	2.64	1040	1100	70.6	15.9	73.1	2.64	1030	1100	70.3	16.0	73.4	2.63	1040	1160
820.cloverleaf_s	384	75.2	11.4	108	1.54	1440	1540	60.2	14.2	89.8	1.86	1490	1550	72.1	11.9	105	1.59	1450	1500
822.palm_s	384	1519	0.808	1340	0.155	879	1080	1484	0.828	1310	0.159	881	1090	1541	0.797	1350	0.154	873	1090
849.fotonik3d_s	384	90.9	7.26	113	1.09	1240	1350	99.8	6.61	123	1.00	1230	1320	102	6.48	126	0.978	1240	1330
857.namd_s	384	136	10.7	156	1.70	1150	1260	137	10.6	158	1.69	1150	1250	150	9.67	170	1.57	1130	1210
865.roms_s	384	300	3.63	312	0.742	1040	1160	513	2.13	502	0.462	978	1190	692	1.58	660	0.351	954	1210
867.nest_s	384	94.7	22.8	96.2	4.02	1020	1330	91.3	23.7	92.9	4.16	1020	1320	89.8	24.0	91.6	4.22	1020	1330
872.marian_s	384	175	6.18	105	1.54	600	1160	175	6.18	105	1.54	598	1210	186	5.80	110	1.46	591	1180

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR850 V4
(2.50 GHZ, Intel Xeon 6748P)

SPECspeed®2026_fp_base = 6.26
SPECspeed®2026_fp_energy_base = 1.18
SPECspeed®2026_fp_peak = Not Run
SPECspeed®2026_fp_energy_peak = Not Run

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Nov-2025
Software Availability: Jan-2026

Base Results Table (Continued)

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
881.neutron_s	384	196	4.15	137	0.963	697	1350	201	4.06	140	0.938	699	1350	<u>201</u>	<u>4.06</u>	<u>142</u>	<u>0.929</u>	<u>706</u>	<u>1350</u>

SPECspeed®2026_fp_base = 6.26

SPECspeed®2026_fp_energy_base = 1.18

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2026-0.902.0-ic2025p3/lib"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the CentOS Stream 9, and the system compiler gcc 11.5.0
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Workload Profile set to Custom
Page Policy set to Adaptive
LLC Prefetch set to Enabled
Platform Controlled Type set to Performance
Stale AtoS set to Enabled
UPI Link Frequency set to Balanced
CPU P-state Control set to None

Sysinfo program /home/cpu2026-0.902.0-ic2025p3/bin/sysinfo
Rev: 069f95da7e7f5d81b2ce48a82150e54f
running on localhost Thu Feb 5 23:11:54 2026

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR850 V4
(2.50 GHZ, Intel Xeon 6748P)

SPECspeed®2026_fp_base =	6.26
SPECspeed®2026_fp_energy_base =	1.18
SPECspeed®2026_fp_peak =	Not Run
SPECspeed®2026_fp_energy_peak =	Not Run

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Nov-2025
Software Availability: Jan-2026

Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -srvm
Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64

2. w
23:11:54 up 4 min, 1 user, load average: 0.06, 0.36, 0.20
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

3. Username
From environment variable \$USER: root

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR850 V4
(2.50 GHZ, Intel Xeon 6748P)

SPECspeed®2026_fp_base =	6.26
SPECspeed®2026_fp_energy_base =	1.18
SPECspeed®2026_fp_peak =	Not Run
SPECspeed®2026_fp_energy_peak =	Not Run

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Nov-2025
Software Availability: Jan-2026

Platform Notes (Continued)

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 8254672
max locked memory      (kbytes, -l) 8192
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 8254672
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECcpu_1.01.sh
sh Run343-compliant-ic2025.3-lin-graniterapids-speedfp-base-smt-on-20260121.sh
runcpu --power --nobuild --reportable --iterations=3 --action validate --define default-platform-flags -c
ic2025.3-graniterapids-cpu2026-0.902-speed-20260121.cfg --threads 384 --define cores=192 --tune base -o
all --define smt-on --define drop_caches fpspeed
runcpu --power --nobuild --reportable --iterations 3 --action validate --define default-platform-flags
--configfile ic2025.3-graniterapids-cpu2026-0.902-speed-20260121.cfg --threads 384 --define cores=192
--tune base --output_format all --define smt-on --define drop_caches --runmode speed --tune base --size
refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.025/templogs/preenv.fpspeed.025.0.log --lognum 025.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026-0.902.0-ic2025p3
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6748P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping      : 1
microcode     : 0x1000405
```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR850 V4 (2.50 GHZ, Intel Xeon 6748P)

SPECspeed®2026_fp_base =	6.26
SPECspeed®2026_fp_energy_base =	1.18
SPECspeed®2026_fp_peak =	Not Run
SPECspeed®2026_fp_energy_peak =	Not Run

CPU2026 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2026

Hardware Availability: Nov-2025

Software Availability: Jan-2026

Platform Notes (Continued)

```

bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores    : 48
siblings     : 96
4 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 2: core ids 0-47
physical id 3: core ids 0-47
physical id 0: apicids 0-95
physical id 1: apicids 128-223
physical id 2: apicids 256-351
physical id 3: apicids 384-479

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                384
On-line CPU(s) list:   0-383
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) 6748P
CPU family:            6
Model:                 173
Thread(s) per core:    2
Core(s) per socket:    48
Socket(s):             4
Stepping:              1
BogoMIPS:              5000.00

```

Flags:

```

fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm

```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR850 V4
(2.50 GHZ, Intel Xeon 6748P)

SPECspeed®2026_fp_base = 6.26
SPECspeed®2026_fp_energy_base = 1.18
SPECspeed®2026_fp_peak = Not Run
SPECspeed®2026_fp_energy_peak = Not Run

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Nov-2025
Software Availability: Jan-2026

Platform Notes (Continued)

```
rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm
arat pln pts vnni avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
amx_int8 flush_lld arch_capabilities
```

```
Virtualization: VT-x
L1d cache: 9 MiB (192 instances)
L1i cache: 12 MiB (192 instances)
L2 cache: 384 MiB (192 instances)
L3 cache: 768 MiB (4 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-47,192-239
NUMA node1 CPU(s): 48-95,240-287
NUMA node2 CPU(s): 96-143,288-335
NUMA node3 CPU(s): 144-191,336-383
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
PBRB-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

```
From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d 48K 9M 12 Data 1 64 1 64
L1i 64K 12M 16 Instruction 1 64 1 64
L2 2M 384M 16 Unified 2 2048 1 64
L3 192M 768M 16 Unified 3 196608 1 64
```

8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR850 V4
(2.50 GHZ, Intel Xeon 6748P)

SPECspeed®2026_fp_base = 6.26
SPECspeed®2026_fp_energy_base = 1.18
SPECspeed®2026_fp_peak = Not Run
SPECspeed®2026_fp_energy_peak = Not Run

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Nov-2025
Software Availability: Jan-2026

Platform Notes (Continued)

```
available: 4 nodes (0-3)
node 0 cpus: 0-47,192-239
node 0 size: 515607 MB
node 0 free: 513889 MB
node 1 cpus: 48-95,240-287
node 1 size: 516031 MB
node 1 free: 514821 MB
node 2 cpus: 96-143,288-335
node 2 size: 516070 MB
node 2 free: 514945 MB
node 3 cpus: 144-191,336-383
node 3 size: 515986 MB
node 3 free: 514959 MB
node distances:
node  0  1  2  3
  0:  10  21  21  21
  1:  21  10  21  21
  2:  21  21  10  21
  3:  21  21  21  10
```

9. /proc/meminfo
MemTotal: 2113224068 kB

10. who -r
run-level 3 Feb 5 23:08

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections nvme-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR850 V4
(2.50 GHZ, Intel Xeon 6748P)

SPECspeed®2026_fp_base =	6.26
SPECspeed®2026_fp_energy_base =	1.18
SPECspeed®2026_fp_peak =	Not Run
SPECspeed®2026_fp_energy_peak =	Not Run

CPU2026 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2026

Hardware Availability: Nov-2025

Software Availability: Jan-2026

Platform Notes (Continued)

```

smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
generated ntp_sync
indirect systemd-userdbd wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=5caa0f87-5156-4d0e-b8a9-eafcf70a6b5a
splash=silent
mitigations=auto
quiet
security=apparmor

```

14. cpupower frequency-info

```

analyzing CPU 30:
Unable to determine current policy
boost state support:
Supported: no
Active: no

```

15. tuned-adm active

```

It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: latency-performance

```

16. sysctl

```

kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60

```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR850 V4
(2.50 GHZ, Intel Xeon 6748P)

SPECspeed®2026_fp_base =	6.26
SPECspeed®2026_fp_energy_base =	1.18
SPECspeed®2026_fp_peak =	Not Run
SPECspeed®2026_fp_energy_peak =	Not Run

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Nov-2025
Software Availability: Jan-2026

Platform Notes (Continued)

```
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7
```

```
-----
20. Disk information
SPEC is set to: /home/cpu2026-0.902.0-ic2025p3
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p3  xfs   890G  256G  635G  29% /
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem SR850 V4
Product Family: ThinkSystem
Serial:          9876543210
```

```
-----
22. dmidecode
Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR850 V4
(2.50 GHZ, Intel Xeon 6748P)

SPECspeed®2026_fp_base =	6.26
SPECspeed®2026_fp_energy_base =	1.18
SPECspeed®2026_fp_peak =	Not Run
SPECspeed®2026_fp_energy_peak =	Not Run

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Nov-2025
Software Availability: Jan-2026

Platform Notes (Continued)

Memory:

5x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400
6x Samsung M321R8GA0PB2-CCPKC 64 GB 2 rank 6400
17x Samsung M321R8GA0PB2-CCPPC 64 GB 2 rank 6400
4x Samsung M321R8GA0PB2-CCPWC 64 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo
BIOS Version: RVE105I-1.20
BIOS Date: 12/16/2025
BIOS Revision: 1.20
Firmware Revision: 2.0

Compiler Version Notes

```
=====  
C      | 811.tealeaf_s(base) 816.nab_s(base) 881.neutron_s(base)  
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++   | 803.sph_exa_s(base) 857.namd_s(base) 867.nest_s(base)  
      | 872.marian_s(base)  
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++, C | 809.cactus_s(base)  
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2025.3.0 Build 20251010  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.  
-----  
=====
```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR850 V4
(2.50 GHZ, Intel Xeon 6748P)

SPECspeed®2026_fp_base =	6.26
SPECspeed®2026_fp_energy_base =	1.18
SPECspeed®2026_fp_peak =	Not Run
SPECspeed®2026_fp_energy_peak =	Not Run

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Nov-2025
Software Availability: Jan-2026

Compiler Version Notes (Continued)

Fortran | 800.pot3d_s(base) 820.cloverleaf_s(base) 822.palm_s(base)
 | 849.fotonik3d_s(base) 865.roms_s(base)

 Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
 2025.3.0 Build 20251010
 Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both C and C++:

icpx icx

Base Portability Flags

800.pot3d_s: -DSPEC_LP64
 803.sph_exa_s: -DSPEC_LP64
 809.cactus_s: -DSPEC_LP64
 811.tealeaf_s: -DSPEC_LP64
 816.nab_s: -DSPEC_LP64
 820.cloverleaf_s: -DSPEC_LP64
 822.palm_s: -DSPEC_LP64
 849.fotonik3d_s: -DSPEC_LP64
 857.namd_s: -DSPEC_LP64
 865.roms_s: -DSPEC_LP64
 867.nest_s: -DSPEC_LP64
 872.marian_s: -DSPEC_LP64
 881.neutron_s: -DSPEC_LP64



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR850 V4
(2.50 GHZ, Intel Xeon 6748P)

SPECspeed®2026_fp_base =	6.26
SPECspeed®2026_fp_energy_base =	1.18
SPECspeed®2026_fp_peak =	Not Run
SPECspeed®2026_fp_energy_peak =	Not Run

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Nov-2025
Software Availability: Jan-2026

Base Optimization Flags

C benchmarks:

```
-m64 -std=c18 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

C++ benchmarks:

```
803.sph_exa_s: -m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib
-ljemalloc
```

857.namd_s: Same as 803.sph_exa_s

867.nest_s: Same as 803.sph_exa_s

```
872.marian_s: -m64 -std=c++17 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-pthread -L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -stand f18 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -DSPEC_OPENMP -fiopenmp
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Lenovo-Platform-SPECcpu-Flags-V1.2-Birchstream-M.html>
<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Lenovo-Platform-SPECcpu-Flags-V1.2-Birchstream-M.xml>
<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64-cpu2026-0.902.xml>



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR850 V4
(2.50 GHZ, Intel Xeon 6748P)

SPECspeed®2026_fp_base =	6.26
SPECspeed®2026_fp_energy_base =	1.18
SPECspeed®2026_fp_peak =	Not Run
SPECspeed®2026_fp_energy_peak =	Not Run

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2026
Hardware Availability: Nov-2025
Software Availability: Jan-2026

PTDaemon, SPEC CPU, and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-05 10:11:53-0500.
Report generated on 2026-05-04 23:34:14 by CPU2026 PDF formatter (unknown).
Originally published on 2026-05-05.