



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2126HS-TN
(H14DSH , AMD EPYC 9965)

SPECrate®2026_fp_base = 999

SPECrate®2026_fp_peak = 999

CPU2026 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Feb-2026

Hardware Availability: Oct-2024

Software Availability: Jan-2026

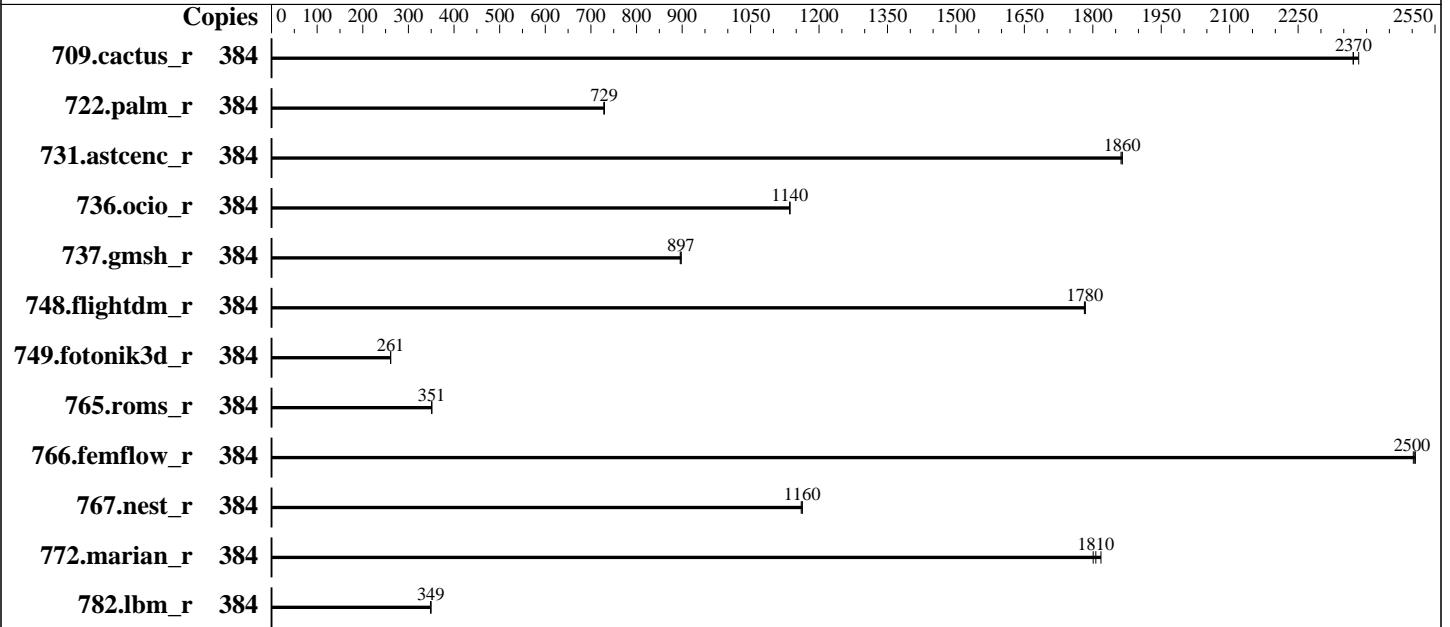

Hardware

CPU Name: AMD EPYC 9965
 Max MHz: 3700
 Nominal: 2250
 Enabled: 384 cores, 2 chips
 Orderable: 2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 384 MB I+D on chip per chip, 32 MB shared / 16 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 1 x 3.84 TB NVMe SSD
 Cooling: Air
 Other: None

Software

OS: Ubuntu 24.04.3 LTS
 6.8.0-90-generic
 Compiler: C/C++/Fortran: Version 5.1.0 of AOCC
 Compiler Category: Vendor
 Firmware: Version 1.5 released May-2025
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2126HS-TN
(H14DSH , AMD EPYC 9965)

SPECrate®2026_fp_base = 999

SPECrate®2026_fp_peak = 999

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	384	<u>139</u>	<u>2370</u>	139	2370	138	2380	384	<u>139</u>	<u>2370</u>	139	2370	138	2380
722.palm_r	384	<u>695</u>	<u>729</u>	696	728	695	730	384	<u>695</u>	<u>729</u>	696	728	695	730
731.ascenc_r	384	173	1860	<u>173</u>	<u>1860</u>	173	1860	384	173	1860	<u>173</u>	<u>1860</u>	173	1860
736.ocio_r	384	296	1140	<u>296</u>	<u>1140</u>	296	1140	384	296	1140	<u>296</u>	<u>1140</u>	296	1140
737.gmsh_r	384	196	898	197	896	<u>196</u>	<u>897</u>	384	196	898	197	896	<u>196</u>	<u>897</u>
748.flightdm_r	384	154	1780	<u>154</u>	<u>1780</u>	154	1780	384	154	1780	<u>154</u>	<u>1780</u>	154	1780
749.fotonik3d_r	384	<u>1701</u>	<u>261</u>	1702	261	1700	261	384	<u>1701</u>	<u>261</u>	1702	261	1700	261
765.roms_r	384	1723	351	1722	351	<u>1723</u>	<u>351</u>	384	1723	351	1722	351	<u>1723</u>	<u>351</u>
766.femflow_r	384	<u>225</u>	<u>2500</u>	225	2500	225	2510	384	<u>225</u>	<u>2500</u>	225	2500	225	2510
767.nest_r	384	<u>262</u>	<u>1160</u>	262	1160	262	1160	384	<u>262</u>	<u>1160</u>	262	1160	262	1160
772.marian_r	384	<u>336</u>	<u>1810</u>	334	1820	337	1800	384	<u>336</u>	<u>1810</u>	334	1820	337	1800
782.lbm_r	384	631	348	<u>630</u>	<u>349</u>	630	349	384	631	348	<u>630</u>	<u>349</u>	630	349

SPECrate®2026_fp_base = 999

SPECrate®2026_fp_peak = 999

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2126HS-TN
(H14DSH , AMD EPYC 9965)

SPECrate®2026_fp_base = 999

SPECrate®2026_fp_peak = 999

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Operating System Notes (Continued)

To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations, 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/spec/speccpu2026rc2bsub/amd_rate_aocc510_znver5_A_lib/lib:/spec/speccpu2026rc2bsub/amd_rate_aocc510_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB Memory using Ubuntu 24.04

Platform Notes

BIOS settings:
SEV Control = Disabled
SMEE = Disabled
Memory Target Speed = DDR6400
Determinism Control = Manual
Determinism Enable = Power
TDP control = Manual
TDP = 500
Package Power Limit Control = Manual
Package Power Limit = 500
TSME = Disabled
NUMA nodes per socket = NPS4
SMT Control = Disabled

Sysinfo program /spec/speccpu2026rc2bsub/bin/sysinfo
Rev: 069f95da7e7f5d81b2ce48a82150e54f
running on smc9689turin-u24-os Mon Feb 2 03:33:31 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2126HS-TN
(H14DSH , AMD EPYC 9965)

SPECrate®2026_fp_base = 999

SPECrate®2026_fp_peak = 999

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Platform Notes (Continued)

1. `uname -srvm`
2. `w`
3. Username
4. `ulimit -a`
5. `sysinfo process ancestry`
6. `/proc/cpuinfo`
7. `lscpu`
8. `numactl --hardware`
9. `/proc/meminfo`
10. `who -r`
11. Systemd service manager version: `systemd 255 (255.4-1ubuntu8.10)`
12. Services, from `systemctl list-unit-files`
13. Linux kernel boot-time arguments, from `/proc/cmdline`
14. `cpupower frequency-info`
15. `sysctl`
16. `/sys/kernel/mm/transparent_hugepage`
17. `/sys/kernel/mm/transparent_hugepage/khugepaged`
18. OS release
19. Disk information
20. `/sys/devices/virtual/dmi/id`
21. `dmidecode`
22. BIOS

```
-----
1. uname -srvm
Linux 6.8.0-90-generic #91-Ubuntu SMP PREEMPT_DYNAMIC Tue Nov 18 14:14:30 UTC 2025 x86_64
-----
```

```
-----
2. w
03:33:31 up 20 min,  3 users,  load average: 0.15, 0.03, 0.01
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1     10.23.196.148 03:30   19:56   0.00s   0.07s  sshd: root@notty
root      tty1     10.23.196.148 03:30   19:56   0.00s   0.11s  sshd: root@pts/0
root      tty1     -              03:28   4:41   0.08s   0.01s  -bash
-----
```

```
-----
3. Username
From environment variable $USER:  root
-----
```

```
-----
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
-----
```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2126HS-TN
(H14DSH , AMD EPYC 9965)

SPECrate®2026_fp_base = 999

SPECrate®2026_fp_peak = 999

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Platform Notes (Continued)

```
memory(kbytes)          unlimited
locked memory(kbytes)   2097152
process                  6189726
nofiles                  1024
vmemory(kbytes)         unlimited
locks                    unlimited
rtprio                   0
```

5. sysinfo process ancestry

```
/sbin/init
SCREEN -S cpu
/bin/bash
python3 ./run_amd_rate_aocc510_znver5_A1.py
/bin/bash ./amd_rate_aocc510_znver5_A1.sh
runcpu --config amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /spec/speccpu2026rc2bsub
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9965 192-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 17
stepping       : 0
microcode      : 0xb101047
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores     : 192
siblings      : 192
2 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-191
physical id 1: core ids 0-191
physical id 0: apicids 0-191
physical id 1: apicids 256-447
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2126HS-TN
(H14DSH , AMD EPYC 9965)

SPECrate®2026_fp_base = 999

SPECrate®2026_fp_peak = 999

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Platform Notes (Continued)

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                       384
On-line CPU(s) list:         0-383
Vendor ID:                    AuthenticAMD
BIOS Vendor ID:              Advanced Micro Devices, Inc.
Model name:                   AMD EPYC 9965 192-Core Processor
BIOS Model name:             AMD EPYC 9965 192-Core Processor          Unknown CPU @ 2.2GHz
BIOS CPU family:             107
CPU family:                   26
Model:                        17
Thread(s) per core:          1
Core(s) per socket:          192
Socket(s):                    2
Stepping:                     0
Frequency boost:              enabled
CPU(s) scaling MHz:          100%
CPU max MHz:                  2250.0000
CPU min MHz:                  1500.0000
BogoMIPS:                     4500.10
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512v1 xsaveopt
xsavec xgetbv1 xsavec cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
vnni avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsmr avx512_vp2intersect
flush_lld debug_swap
L1d cache:                    18 MiB (384 instances)
L1i cache:                    12 MiB (384 instances)
L2 cache:                     384 MiB (384 instances)
L3 cache:                     768 MiB (24 instances)
NUMA node(s):                 8

```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2126HS-TN
(H14DSH , AMD EPYC 9965)

SPECrate®2026_fp_base = 999

SPECrate®2026_fp_peak = 999

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Platform Notes (Continued)

```

NUMA node0 CPU(s):          0-47
NUMA node1 CPU(s):          48-95
NUMA node2 CPU(s):          96-143
NUMA node3 CPU(s):          144-191
NUMA node4 CPU(s):          192-239
NUMA node5 CPU(s):          240-287
NUMA node6 CPU(s):          288-335
NUMA node7 CPU(s):          336-383
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability L1tf:                 Not affected
Vulnerability Mds:                  Not affected
Vulnerability Meltdown:             Not affected
Vulnerability Mmio stale data:      Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:             Not affected
Vulnerability Spec rstack overflow:  Not affected
Vulnerability Spec store bypass:    Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:           Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:           Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                     disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:                Not affected
Vulnerability Tsx async abort:      Not affected
Vulnerability Vmscape:              Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	18M	12	Data	1	64	1	64
L1i	32K	12M	8	Instruction	1	64	1	64
L2	1M	384M	16	Unified	2	1024	1	64
L3	32M	768M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-47
node 0 size: 193023 MB
node 0 free: 191816 MB
node 1 cpus: 48-95
node 1 size: 193519 MB
node 1 free: 193038 MB
node 2 cpus: 96-143
node 2 size: 193519 MB
node 2 free: 192951 MB
node 3 cpus: 144-191
node 3 size: 193519 MB

```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2126HS-TN
(H14DSH , AMD EPYC 9965)

SPECrate®2026_fp_base = 999

SPECrate®2026_fp_peak = 999

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Platform Notes (Continued)

```

node 3 free: 192990 MB
node 4 cpus: 192-239
node 4 size: 193476 MB
node 4 free: 193013 MB
node 5 cpus: 240-287
node 5 size: 193519 MB
node 5 free: 193041 MB
node 6 cpus: 288-335
node 6 size: 193519 MB
node 6 free: 193068 MB
node 7 cpus: 336-383
node 7 size: 193412 MB
node 7 free: 192420 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10 12 12 12 32 32 32 32
  1:  12 10 12 12 32 32 32 32
  2:  12 12 10 12 32 32 32 32
  3:  12 12 12 10 32 32 32 32
  4:  32 32 32 32 10 12 12 12
  5:  32 32 32 32 12 10 12 12
  6:  32 32 32 32 12 12 10 12
  7:  32 32 32 32 12 12 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:          1584649628 kB

```

```

-----
10. who -r
    run-level 5 Feb 2 03:13

```

```

-----
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.10)
    Default Target    Status
    graphical         running

```

```

-----
12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
    enabled        ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init
                   cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                   grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd
                   networkd-dispatcher nvme-fc-boot-connections nvme-fc-autoconnect open-iscsi open-vm-tools
                   pollinate rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd
                   systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald
                   ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth

```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2126HS-TN
(H14DSH , AMD EPYC 9965)

SPECrate®2026_fp_base = 999

SPECrate®2026_fp_peak = 999

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Platform Notes (Continued)

```

enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled        console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
                 systemd-boot-check-no-failures systemd-confext systemd-network-generator
                 systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
                 systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
                 systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
                 systemd-time-wait-sync upower
indirect        systemd-sysupdate systemd-sysupdate-reboot uidd
masked          cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.8.0-90-generic
root=UUID=0b5a48bd-fabf-4dbc-a635-d9dbcff2ae4e
ro

```

14. cpupower frequency-info

```

analyzing CPU 186:
  current policy: frequency should be within 1.50 GHz and 2.25 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 2250MHz

```

15. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    1

```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2126HS-TN
(H14DSH , AMD EPYC 9965)

SPECrate®2026_fp_base = 999

SPECrate®2026_fp_peak = 999

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Platform Notes (Continued)

```
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

16. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvice madvice never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS

19. Disk information
SPEC is set to: /spec/speccpu2026rc2bsub
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p1 ext4 3.5T 14G 3.5T 1% /spec

20. /sys/devices/virtual/dmi/id
Vendor: Supermicro
Product: AS -2126HS-TN
Product Family: SMC H14
Serial: S920464X4819689

21. dmidecode
Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
24x SK Hynix HMC94AHBRA277N 64 GB 2 rank 6400

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2126HS-TN
(H14DSH , AMD EPYC 9965)

SPECrate®2026_fp_base = 999

SPECrate®2026_fp_peak = 999

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Platform Notes (Continued)

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 1.5
BIOS Date: 05/12/2025
BIOS Revision: 5.35

Compiler Version Notes

=====
C | 782.lbm_r(base)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
=====

=====
C++ | 731.astcenc_r(base) 736.ocio_r(base) 748.flightdm_r(base)
| 766.femflow_r(base) 767.nest_r(base) 772.marian_r(base)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
=====

=====
C++, C | 709.cactus_r(base) 737.gmsh_r(base)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
=====

=====
Fortran | 722.palm_r(base) 749.fotonik3d_r(base) 765.roms_r(base)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2126HS-TN
(H14DSH , AMD EPYC 9965)

SPECrate®2026_fp_base = 999

SPECrate®2026_fp_peak = 999

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both C and C++:

clang++ clang

Base Portability Flags

709.cactus_r: -DSPEC_LP64
722.palm_r: -DSPEC_LP64
731.ascenc_r: -DSPEC_LP64
736.ocio_r: -fno-finite-math-only -DSPEC_LP64
737.gmsh_r: -fno-fast-math -DSPEC_LP64
748.flightdm_r: -fno-reciprocal-math -DSPEC_LP64
749.fotonik3d_r: -DSPEC_LP64
765.roms_r: -DSPEC_LP64
766.femflow_r: -DSPEC_LP64
767.nest_r: -fno-finite-math-only -DSPEC_LP64
772.marian_r: -DSPEC_LP64
782.lbm_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2126HS-TN
(H14DSH , AMD EPYC 9965)

SPECrate®2026_fp_base = 999

SPECrate®2026_fp_peak = 999

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
-lflang
```

C++ benchmarks:

```
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -flto  
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
-lflang
```

Fortran benchmarks:

```
-m64 -Mstandard -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -ffast-math -O3  
-march=znver5 -fveclib=AMDLIBM -flto -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc  
-lflang
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

Peak Optimization Flags

C benchmarks:

```
782.lbm_r: basepeak = yes
```

C++ benchmarks:

```
731.astcenc_r: basepeak = yes
```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2126HS-TN
(H14DSH , AMD EPYC 9965)

SPECrate®2026_fp_base = 999

SPECrate®2026_fp_peak = 999

CPU2026 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2026
Hardware Availability: Oct-2024
Software Availability: Jan-2026

Peak Optimization Flags (Continued)

736.ocio_r: basepeak = yes

748.flightdm_r: basepeak = yes

766.femflow_r: basepeak = yes

767.nest_r: basepeak = yes

772.marian_r: basepeak = yes

Fortran benchmarks:

722.palm_r: basepeak = yes

749.fotonik3d_r: basepeak = yes

765.roms_r: basepeak = yes

Benchmarks using both C and C++:

709.cactus_r: basepeak = yes

737.gmsh_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.html>

<http://www.spec.org/cpu2026/results/flags/Supermicro-Platform-Settings-V1.2-Turin-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.xml>

<http://www.spec.org/cpu2026/results/flags/Supermicro-Platform-Settings-V1.2-Turin-revG.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-01 22:33:30-0500.
Report generated on 2026-05-11 16:38:24 by CPU2026 PDF formatter (unknown).
Originally published on 2026-05-05.