



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2026_int_base = 6.60

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2026

Hardware Availability: Jun-2023

Software Availability: Apr-2026

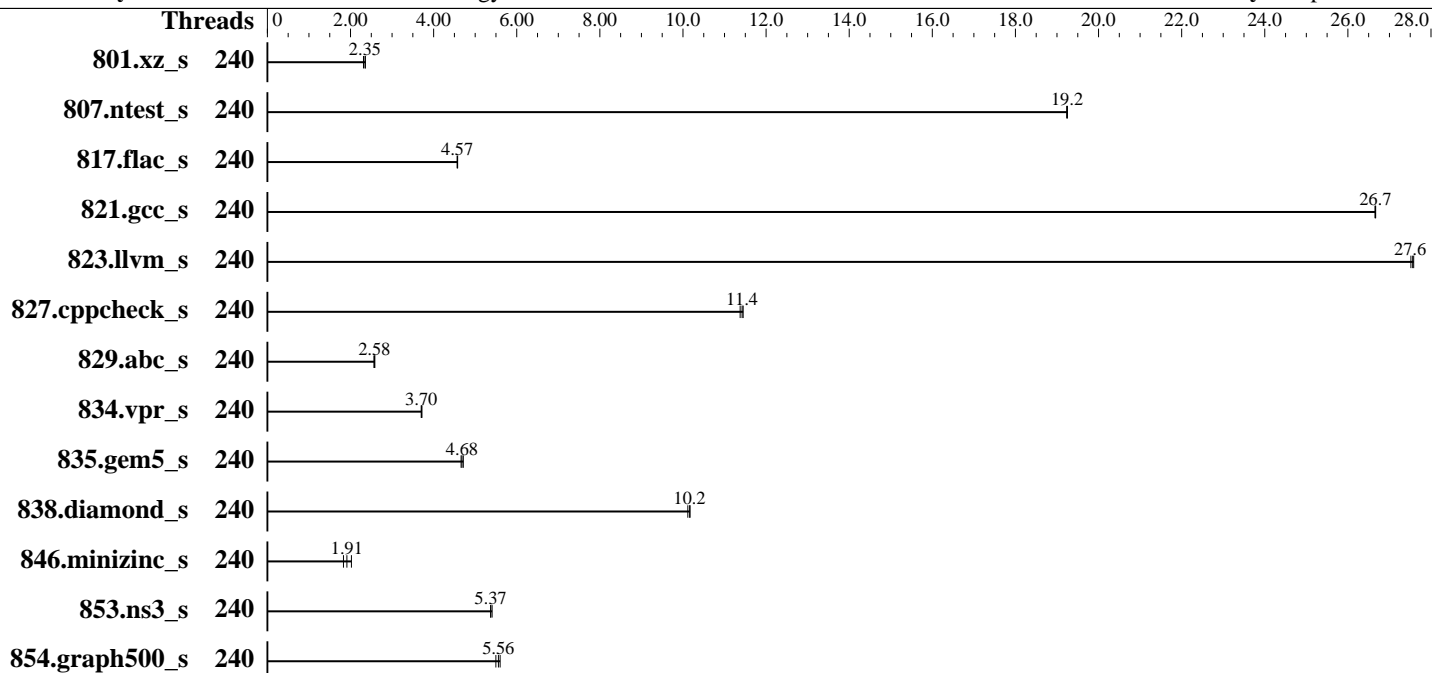

Hardware

CPU Name: Intel Xeon Platinum 8490H
 Max MHz: 3500
 Nominal: 1900
 Enabled: 240 cores, 4 chips
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 112.5 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 960 GB M.2 NVME SSD
 Cooling: Air
 Other: None

Software

OS: Red Hat Enterprise Linux 9.6 (Plow)
 Kernel 5.14.0-570.12.1.el9_6.x86_64
 Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2026.0 of Intel Fortran Compiler for Linux
 Compiler Category: Vendor
 Firmware: Lenovo BIOS Version RSE127G 8.50 released May-2026
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator v5.3
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2026_int_base = 6.60

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2026

Hardware Availability: Jun-2023

Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
801.xz_s	240	<u>252</u>	<u>2.35</u>	251	2.36	256	2.31							
807.ntest_s	240	59.3	19.2	<u>59.2</u>	<u>19.2</u>	59.2	19.3							
817.flac_s	240	<u>380</u>	<u>4.57</u>	380	4.57	379	4.58							
821.gcc_s	240	<u>77.6</u>	<u>26.7</u>	77.6	26.7	77.7	26.7							
823.llvm_s	240	<u>51.2</u>	<u>27.6</u>	51.3	27.5	51.2	27.6							
827.cppcheck_s	240	97.7	11.4	<u>98.0</u>	<u>11.4</u>	98.4	11.4							
829.abc_s	240	<u>323</u>	<u>2.58</u>	321	2.59	324	2.56							
834.vpr_s	240	<u>258</u>	<u>3.70</u>	256	3.72	258	3.70							
835.gem5_s	240	242	4.71	244	4.66	<u>243</u>	<u>4.68</u>							
838.diamond_s	240	98.4	10.2	98.9	10.1	<u>98.5</u>	<u>10.2</u>							
846.minizinc_s	240	366	1.83	<u>350</u>	<u>1.91</u>	331	2.02							
853.ns3_s	240	<u>215</u>	<u>5.37</u>	213	5.41	215	5.37							
854.graph500_s	240	111	5.50	109	5.60	<u>110</u>	<u>5.56</u>							

SPECspeed®2026_int_base = 6.60

SPECspeed®2026_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/cpu2026-1.0.1-ic2026.0/lib"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2026_int_base = 6.60

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2026

Hardware Availability: Jun-2023

Software Availability: Apr-2026

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the CentOS Stream 9, and the system compiler gcc 11.5.0

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

C-States set to Legacy

AMP Prefetch set to Enabled

Misc set to Option4

HyperThreading set to Disabled

Page Policy set to Adaptive

Sysinfo program /home/cpu2026-1.0.1-ic2026.0/bin/sysinfo

Rev: 779ab21020787073335a329f3a45e2cd

running on localhost Fri May 29 04:17:33 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-51.el9)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2026_int_base = 6.60

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 9017

Test Date: May-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Apr-2026

Platform Notes (Continued)

22. dmidecode
23. BIOS

1. `uname -srv`
Linux 5.14.0-570.12.1.el9_6.x86_64 #1 SMP PREEMPT_DYNAMIC Fri Apr 4 10:41:31 EDT 2025 x86_64

2. `w`
04:17:33 up 2:21, 0 users, load average: 52.59, 58.12, 39.31
USER TTY LOGIN@ IDLE JCPU PCPU WHAT

3. Username
From environment variable \$USER: root

4. `ulimit -a`
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4126737
max locked memory (kbytes, -l) 8192
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4126737
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. `sysinfo process ancestry`
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECcpu_1.02.sh
sh Run552-compliant-ic2026.0-lin-sapphirerapids-speedint-base-smt-off-20260429.sh
runcpu --nobuild --iterations=3 --reportable --action validate --define default-platform-flags -c
ic2026.0-sapphirerapids-cpu2026-1.0.1-speed-20260429.cfg --threads 240 --define cores=240 --tune base -o

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2026_int_base = 6.60

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 9017

Test Date: May-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Apr-2026

Platform Notes (Continued)

```

all --define intspeedaffinity --define drop_caches intspeed
runcpu --nobuild --iterations 3 --reportable --action validate --define default-platform-flags --configfile
ic2026.0-sapphirerapids-cpu2026-1.0.1-speed-20260429.cfg --threads 240 --define cores=240 --tune base
--output_format all --define intspeedaffinity --define drop_caches --nopower --runmode speed --tune base
--size refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.014/templogs/preenv.intspeed.014.0.log --lognum 014.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026-1.0.1-ic2026.0

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Platinum 8490H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b000661
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores      : 60
siblings       : 60
4 physical ids (chips)
240 processors (hardware threads)
physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 2: core ids 0-59
physical id 3: core ids 0-59
physical id 0: apicids
0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72
, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118
physical id 1: apicids
128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 1
80, 182, 184, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230, 23
2, 234, 236, 238, 240, 242, 244, 246
physical id 2: apicids
256, 258, 260, 262, 264, 266, 268, 270, 272, 274, 276, 278, 280, 282, 284, 286, 288, 290, 292, 294, 296, 298, 300, 302, 304, 306, 3
08, 310, 312, 314, 316, 318, 320, 322, 324, 326, 328, 330, 332, 334, 336, 338, 340, 342, 344, 346, 348, 350, 352, 354, 356, 358, 36
0, 362, 364, 366, 368, 370, 372, 374
physical id 3: apicids
384, 386, 388, 390, 392, 394, 396, 398, 400, 402, 404, 406, 408, 410, 412, 414, 416, 418, 420, 422, 424, 426, 428, 430, 432, 434, 4
36, 438, 440, 442, 444, 446, 448, 450, 452, 454, 456, 458, 460, 462, 464, 466, 468, 470, 472, 474, 476, 478, 480, 482, 484, 486, 48
8, 490, 492, 494, 496, 498, 500, 502

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2026_int_base = 6.60

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 9017

Test Date: May-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Apr-2026

Platform Notes (Continued)

From lscpu from util-linux 2.37.4:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      240
On-line CPU(s) list:        0-239
Vendor ID:                   GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                  Intel(R) Xeon(R) Platinum 8490H
BIOS Model name:            Intel(R) Xeon(R) Platinum 8490H
CPU family:                  6
Model:                       143
Thread(s) per core:         1
Core(s) per socket:         60
Socket(s):                   4
Stepping:                    8
CPU(s) scaling MHz:         100%
CPU max MHz:                 3500.0000
CPU min MHz:                 800.0000
BogoMIPS:                   3800.00

```

Flags:

```

fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln
pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
amx_int8 flush_lld arch_capabilities

```

```

Virtualization:              VT-x
L1d cache:                   11.3 MiB (240 instances)
L1i cache:                   7.5 MiB (240 instances)
L2 cache:                    480 MiB (240 instances)
L3 cache:                    450 MiB (4 instances)
NUMA node(s):                4
NUMA node0 CPU(s):          0-59

```

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2026_int_base = 6.60

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 9017

Test Date: May-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Apr-2026

Platform Notes (Continued)

```

NUMA node1 CPU(s):           60-119
NUMA node2 CPU(s):           120-179
NUMA node3 CPU(s):           180-239
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:   Not affected
Vulnerability Lltf:           Not affected
Vulnerability Mds:            Not affected
Vulnerability Meltdown:       Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:       Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:      Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:      Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                PBRSE-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds:          Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	11.3M	12	Data	1	64	1	64
L1i	32K	7.5M	8	Instruction	1	64	1	64
L2	2M	480M	16	Unified	2	2048	1	64
L3	112.5M	450M	15	Unified	3	122880	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-59
node 0 size: 257694 MB
node 0 free: 256454 MB
node 1 cpus: 60-119
node 1 size: 258032 MB
node 1 free: 249923 MB
node 2 cpus: 120-179
node 2 size: 258032 MB
node 2 free: 257296 MB
node 3 cpus: 180-239
node 3 size: 257971 MB
node 3 free: 257296 MB
node distances:
node   0   1   2   3
0:    10  21  21  21
1:    21  10  21  21
2:    21  21  10  21

```

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2026_int_base = 6.60

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2026
Hardware Availability: Jun-2023
Software Availability: Apr-2026

Platform Notes (Continued)

3: 21 21 21 10

9. /proc/meminfo
MemTotal: 1056492628 kB

10. who -r
run-level 3 May 29 01:56

11. Systemd service manager version: systemd 252 (252-51.e19)
Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed
UNIT LOAD ACTIVE SUB DESCRIPTION
* dnf-makecache.service loaded failed failed dnf makecache

13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor
lvm2-monitor mdmonitor microcode nis-domainname nvme-fc-boot-connections rhsmcertd rsyslog
rtkit-daemon selinux-autorelabel-mark sshd sssd systemd-boot-update
systemd-network-generator systemd-pstore udisks2 upower
enabled-runtime systemd-remount-fs
disabled blk-availability canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot console-getty cpupower debug-shell dnf-system-upgrade
kvm_stat lvm-devices-import man-db-restart-cache-update nftables nvme-fc-autoconnect pesign
rdisc rhcd rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@
sshd-keygen@ systemd-boot-check-no-failures systemd-sysext
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd3,gpt2)/vmlinuz-5.14.0-570.12.1.e19_6.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2026_int_base = 6.60

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 9017

Test Date: May-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Apr-2026

Platform Notes (Continued)

15. cpupower frequency-info
analyzing CPU 190:

current policy: frequency should be within 800 MHz and 3.50 GHz.
The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes
Active: yes

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

17. /sys/kernel/mm/transparent_hugepage

defrag	always defer+advise [advise] never
enabled	[always] advise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2026_int_base = 6.60

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 9017

Test Date: May-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Apr-2026

Platform Notes (Continued)

19. OS release

```
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.6 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.6 (Plow)
system-release  Red Hat Enterprise Linux release 9.6 (Plow)
```

20. Disk information

```
SPEC is set to: /home/cpu2026-1.0.1-ic2026.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   819G  73G  746G  9% /home
```

21. /sys/devices/virtual/dmi/id

```
Vendor:      Lenovo
Product:     ThinkSystem SR850 V3
Product Family: ThinkSystem
Serial:      None
```

22. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
  32x SK Hynix HMC88AEBRA168N 32 GB 2 rank 4800
```

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      Lenovo
BIOS Version:     RSE127G-8.50
BIOS Date:        05/15/2026
BIOS Revision:    8.50
Firmware Revision: 8.10
```

Compiler Version Notes

```
=====  
C      | 854.graph500_s(base)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2026_int_base = 6.60

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 9017

Test Date: May-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Apr-2026

Compiler Version Notes (Continued)

Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

=====
C++ | 807.ntest_s(base) 827.cppcheck_s(base) 853.ns3_s(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

=====
C++, C | 801.xz_s(base) 817.flac_s(base) 821.gcc_s(base) 823.llvm_s(base)
| 829.abc_s(base) 834.vpr_s(base) 835.gem5_s(base) 838.diamond_s(base)
| 846.minizinc_s(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Benchmarks using both C and C++:

icpx icx

Base Portability Flags

834.vpr_s: -fno-fast-math

Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500

(Continued on next page)



SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2026_int_base = 6.60

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2026

Hardware Availability: Jun-2023

Software Availability: Apr-2026

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-xsapphirerapids -mprefer-vector-width=512 -O3 -ffp-model=fast -fltto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fno-strict-aliasing -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xsapphirerapids -mprefer-vector-width=512 -O3 -ffp-model=fast -fltto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -pthread
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500 -xsapphirerapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -fltto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fno-strict-aliasing -fiopenmp
-DSPEC_OPENMP -pthread -L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Lenovo-Platform-SPECcpu2026-Flags-V1.2-Eaglestream-AD.html>
<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Lenovo-Platform-SPECcpu2026-Flags-V1.2-Eaglestream-AD.xml>
<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-05-28 16:17:33-0400.
Report generated on 2026-06-16 17:18:58 by CPU2026 PDF formatter (unknown).
Originally published on 2026-06-16.