



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6980E+)

SPECrate®2026\_fp\_base = 519

SPECrate®2026\_fp\_peak = 530

CPU2026 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: May-2026

Hardware Availability: Jun-2026

Software Availability: Apr-2026

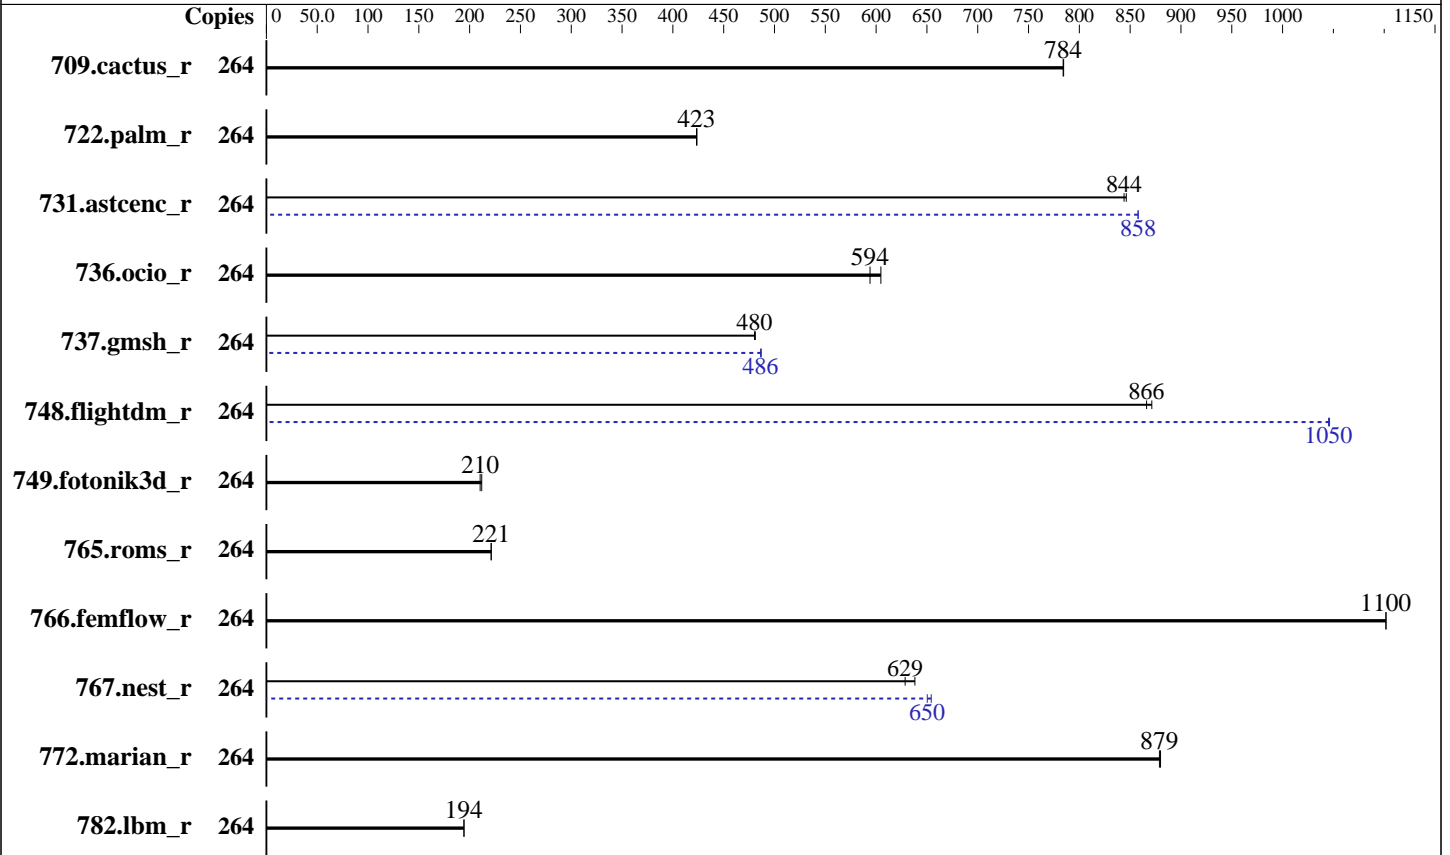

### Hardware

CPU Name: Intel Xeon 6980E+  
 Max MHz: 3200  
 Nominal: 2100  
 Enabled: 264 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 264 MB I+D on chip per chip, 4 MB shared / 4 cores  
 L3: 528 MB I+D on chip per chip  
 Other: None  
 Memory: 1152 GB (12 x 96 GB 2Rx4 PC5-8000B-R)  
 Storage: 1 x 480 GB NVMe SSD  
 Cooling: Air  
 Other: None

### Software

OS: Red Hat Enterprise Linux 9.7  
 Kernel 5.14.0-611.5.1.el9\_7.x86\_64  
 Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2026.0 of Intel Fortran Compiler for Linux  
 Compiler Category: Vendor  
 Firmware: Version 1.5b released May-2026  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.3.0  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6980E+)

SPECrate®2026\_fp\_base = 519

SPECrate®2026\_fp\_peak = 530

CPU2026 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: May-2026  
Hardware Availability: Jun-2026  
Software Availability: Apr-2026

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	264	289	785	<b>289</b>	<b>784</b>			264	289	785	<b>289</b>	<b>784</b>		
722.palm_r	264	<b>823</b>	<b>423</b>	822	424			264	<b>823</b>	<b>423</b>	822	424		
731.ascenc_r	264	<b>263</b>	<b>844</b>	262	846			264	<b>259</b>	<b>858</b>	259	858		
736.ocio_r	264	<b>389</b>	<b>594</b>	382	605			264	<b>389</b>	<b>594</b>	382	605		
737.gmsh_r	264	<b>252</b>	<b>480</b>	252	481			264	<b>249</b>	<b>486</b>	249	487		
748.flightdm_r	264	<b>218</b>	<b>866</b>	217	871			264	<b>181</b>	<b>1050</b>	181	1050		
749.fotonik3d_r	264	<b>1451</b>	<b>210</b>	1440	212			264	<b>1451</b>	<b>210</b>	1440	212		
765.roms_r	264	<b>1880</b>	<b>221</b>	1879	221			264	<b>1880</b>	<b>221</b>	1879	221		
766.femflow_r	264	<b>352</b>	<b>1100</b>	351	1100			264	<b>352</b>	<b>1100</b>	351	1100		
767.nest_r	264	<b>333</b>	<b>629</b>	328	638			264	<b>322</b>	<b>650</b>	320	654		
772.marian_r	264	<b>474</b>	<b>879</b>	474	880			264	<b>474</b>	<b>879</b>	474	880		
782.lbm_r	264	<b>778</b>	<b>194</b>	778	194			264	<b>778</b>	<b>194</b>	778	194		

SPECrate®2026\_fp\_base = **519**

SPECrate®2026\_fp\_peak = **530**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2026/lib"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP, Intel Xeon 6980E+)

SPECrate®2026\_fp\_base = 519

SPECrate®2026\_fp\_peak = 530

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### General Notes (Continued)

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the CentOS Stream 9, and the system compiler gcc 11.5.0  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS settings:  
Workload Profile = HPC  
KTI Prefetch = Enable  
Stale AtoS = Disable  
LLC Dead Line Alloc = Disable

Sysinfo program /home/cpu2026/bin/sysinfo  
Rev: 779ab21020787073335a329f3a45e2cd  
running on Fri May 22 21:35:12 2026

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-55.e19)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6980E+)

SPECrate®2026\_fp\_base = 519

SPECrate®2026\_fp\_peak = 530

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

- 17. /sys/kernel/mm/transparent\_hugepage
- 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -srvm
Linux 5.14.0-611.5.1.el9_7.x86_64 #1 SMP PREEMPT_DYNAMIC Fri Oct 17 14:16:35 EDT 2025 x86_64
```

```
2. w
 21:35:12 up 4:37, 1 user, load average: 89.58, 209.61, 237.45
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root      tty1    16:58   4:26m  1.42s  0.01s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 4640021
max locked memory           (kbytes, -l) 64
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority          (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
max user processes           (-u) 4640021
virtual memory               (kbytes, -v) unlimited
file locks                   (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP, Intel Xeon 6980E+)

SPECrate®2026\_fp\_base = 519

SPECrate®2026\_fp\_peak = 530

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

```

-bash
-bash
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 264 -c
ic2026.0-clearwaterforest-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define peakfpcopies=132
--define physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
-o all fprate
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 264 --configfile
ic2026.0-clearwaterforest-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define peakfpcopies=132
--define physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
--output_format all --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2026.002/templogs/preenv.fprate.002.0.log --lognum 002.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6980E+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 221
stepping       : 1
microcode      : 0x1000120
bugs           : spectre_v1 spectre_v2 spec_store_bypass swappgs bhi spectre_v2_user
cpu cores     : 264
siblings       : 264
1 physical ids (chips)
264 processors (hardware threads)
physical id 0: core ids 0-87,128-215,256-343
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,256,258,260,262,26
4,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,308,310,312,314,316
,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,360,362,364,366,368
,370,372,374,376,378,380,382,384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,4
22,424,426,428,430,512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,55
4,556,558,560,562,564,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606
,608,610,612,614,616,618,620,622,624,626,628,630,632,634,636,638,640,642,644,646,648,650,652,654,656,658
,660,662,664,666,668,670,672,674,676,678,680,682,684,686

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6980E+)

SPECrate®2026\_fp\_base = 519

SPECrate®2026\_fp\_peak = 530

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 48 bits virtual
Byte Order:                   Little Endian
CPU(s):                       264
On-line CPU(s) list:         0-263
Vendor ID:                    GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                   Intel(R) Xeon(R) 6980E+
BIOS Model name:             Intel(R) Xeon(R) 6980E+
CPU family:                   6
Model:                        221
Thread(s) per core:          1
Core(s) per socket:          264
Socket(s):                    1
Stepping:                     1
BogoMIPS:                     4200.00
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                               pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                               pdpe1gb rdtscp lm constant_tsc art arch_perfmon bts rep_good nopl
                               xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                               pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma
                               cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                               tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                               3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin
                               cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                               flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep
                               bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb
                               intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc
                               cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                               user_shstk avx_vnni lam wbnoinvd dtherm ida arat pln pts vnmi umip
                               pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid bus_lock_detect
                               cldemote movdiri movdir64b enqcmd fsrm md_clear serialize pconfig
                               arch_lbr ibt flush_lld arch_capabilities
Virtualization:               VT-x
L1d cache:                    8.3 MiB (264 instances)
L1i cache:                    16.5 MiB (264 instances)
L2 cache:                     264 MiB (66 instances)
L3 cache:                     528 MiB (1 instance)
NUMA node(s):                 3
NUMA node0 CPU(s):           0-87
NUMA node1 CPU(s):           88-175
NUMA node2 CPU(s):           176-263
Vulnerability Gather data sampling: Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:          Not affected

```

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6980E+)

SPECrate®2026\_fp\_base = 519

SPECrate®2026\_fp\_peak = 530

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; PBR SB-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsa:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	8.3M	8	Data	1	64	1	64
L1i	64K	16.5M	8	Instruction	1	128	1	64
L2	4M	264M	16	Unified	2	4096	1	64
L3	528M	528M	16	Unified	3	540672	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 3 nodes (0-2)
node 0 cpus: 0-87
node 0 size: 386041 MB
node 0 free: 363160 MB
node 1 cpus: 88-175
node 1 size: 387049 MB
node 1 free: 364760 MB
node 2 cpus: 176-263
node 2 size: 386978 MB
node 2 free: 364757 MB
node distances:
node    0    1    2
 0:   10   15   17
 1:   15   10   15
 2:   17   15   10

```

9. /proc/meminfo

MemTotal: 1187911120 kB

10. who -r

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6980E+)

SPECrate®2026\_fp\_base = 519

SPECrate®2026\_fp\_peak = 530

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

run-level 3 May 22 16:58

-----  
11. Systemd service manager version: systemd 252 (252-55.e19)

Default Target Status  
multi-user running

-----  
12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld gdm getty@ insights-client-boot irqbalance iscsi-onboot iscsi-starter kdump libstoragemgmt low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvme-fc-boot-connections ostree-remount qemu-guest-agent rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control systemd-boot-update systemd-network-generator systemd-pstore tuned udisks2 upower vgauthd vmtoolsd
enabled-runtime	systemd-remount-fs
disabled	arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait chronyd-restricted cni-dhcp console-getty cpupower cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq iprump iprinit iprupdate iscsi-init iscsid iscsiui0 kpatch kvm_stat ledmon lvm-devices-import man-db-restart-cache-update netavark-dhcp-proxy netavark-firewalld-reload nftables nvme-autoconnect ostree-readonly-sysroot-migration ostree-state-overlay@ podman podman-auto-update podman-clean-transient podman-kube@ podman-restart psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@ speech-dispatcherd sshd-keygen@ systemd-boot-check-no-failures systemd-sysextd tuned-ppd wpa_supplicant
indirect	iscsi spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-611.5.1.e19\_7.x86\_64  
root=/dev/mapper/rhel\_135--180--133-root  
ro  
resume=/dev/mapper/rhel\_135--180--133-swap  
rd.lvm.lv=rhel\_135-180-133/root  
rd.lvm.lv=rhel\_135-180-133/swap  
rhgb  
quiet  
crashkernel=1G-2G:192M,2G-64G:256M,64G-:512M

-----  
14. cpupower frequency-info

analyzing CPU 51:  
Unable to determine current policy

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6980E+)

SPECrate®2026\_fp\_base = 519

SPECrate®2026\_fp\_peak = 530

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

boost state support:  
Supported: yes  
Active: yes

-----  
15. tuned-adm active  
Current active profile: throughput-performance

-----  
16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	40
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	10
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

-----  
17. /sys/kernel/mm/transparent\_hugepage

defrag	always	defer	defer+madvise	[madvise]	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6980E+)

SPECrate®2026\_fp\_base = 519

SPECrate®2026\_fp\_peak = 530

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

-----  
19. OS release

From /etc/\*-release /etc/\*-version  
os-release Red Hat Enterprise Linux 9.7 (Plow)  
redhat-release Red Hat Enterprise Linux release 9.7 (Plow)  
system-release Red Hat Enterprise Linux release 9.7 (Plow)

-----  
20. Disk information

SPEC is set to: /home/cpu2026  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/rhel\_135--180--133-home xfs 372G 91G 281G 25% /home

-----  
21. /sys/devices/virtual/dmi/id

Vendor: Supermicro  
Product: Super Server  
Product Family: Family  
Serial: 0123456789

-----  
22. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
12x SK Hynix HMC4M4AMBRB970N 96 GB 2 rank 8000

-----  
23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 1.5b  
BIOS Date: 05/04/2026  
BIOS Revision: 5.35

### Compiler Version Notes

=====  
C | 782.lbm\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP, Intel Xeon 6980E+)

SPECrate®2026\_fp\_base = 519

SPECrate®2026\_fp\_peak = 530

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

### Compiler Version Notes (Continued)

```

=====
C++      | 731.astcenc_r(base, peak) 736.ocio_r(base, peak)
         | 748.flightdm_r(base, peak) 766.femflow_r(base, peak)
         | 767.nest_r(base, peak) 772.marian_r(base, peak)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
=====

```

```

=====
C++, C   | 709.cactus_r(base, peak) 737.gmsh_r(base, peak)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran  | 722.palm_r(base, peak) 749.fotonik3d_r(base, peak) 765.roms_r(base,
         | peak)
=====

```

```

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
=====

```

### Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx

Benchmarks using both C and C++:  
icpx icx



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6980E+)

SPECrate®2026\_fp\_base = 519

SPECrate®2026\_fp\_peak = 530

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

## Base Portability Flags

737.gmsh\_r: -fno-associative-math

## Base Optimization Flags

### C benchmarks:

```
-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib
-ljemalloc
```

### C++ benchmarks:

```
-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib
-ljemalloc
```

### Fortran benchmarks:

```
-m64 -stand f18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xclearwaterforest -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

### Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500 -xclearwaterforest -O3
-ffp-model=fast -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

## Peak Compiler Invocation

### C benchmarks:

icx

### C++ benchmarks:

icpx

### Fortran benchmarks:

ifx

### Benchmarks using both C and C++:

icpx icx



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6980E+)

SPECrate®2026\_fp\_base = 519

SPECrate®2026\_fp\_peak = 530

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

## Peak Portability Flags

737.gmsh\_r: -fno-associative-math

## Peak Optimization Flags

C benchmarks:

782.lbm\_r: basepeak = yes

C++ benchmarks:

731.astcenc\_r: -m64 -std=c++17 -Wl,-z,muldefs  
-Wl,-plugin-opt=-inline-threshold=1500  
-fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)  
-ffp-model=fast -xclearwaterforest(pass 2) -flto  
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

736.ocio\_r: basepeak = yes

748.flightdm\_r: Same as 731.astcenc\_r

766.femflow\_r: basepeak = yes

767.nest\_r: Same as 731.astcenc\_r

772.marian\_r: basepeak = yes

Fortran benchmarks:

722.palm\_r: basepeak = yes

749.fotonik3d\_r: basepeak = yes

765.roms\_r: basepeak = yes

Benchmarks using both C and C++:

709.cactus\_r: basepeak = yes

737.gmsh\_r: -m64 -std=c++17 -std=c18 -Wl,-z,muldefs  
-Wl,-plugin-opt=-inline-threshold=1500  
-fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)

(Continued on next page)



# SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-112HA-TN  
(X14SBH-AP , Intel Xeon 6980E+)

SPECrate®2026\_fp\_base = 519

SPECrate®2026\_fp\_peak = 530

**CPU2026 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** May-2026  
**Hardware Availability:** Jun-2026  
**Software Availability:** Apr-2026

## Peak Optimization Flags (Continued)

737.gmsh\_r (continued):  
-ffp-model=fast -xclearwaterforest(pass 2) -flto  
-qopt-mem-layout-trans=4 -O3 -mfpmath=sse -funroll-loops  
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html>  
<http://www.spec.org/cpu2026/results/flags/Supermicro-Platform-Settings-V1.2-CWF-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml>  
<http://www.spec.org/cpu2026/results/flags/Supermicro-Platform-Settings-V1.2-CWF-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2026 v1.0.1 on 2026-05-22 09:35:11-0400.  
Report generated on 2026-06-16 17:19:41 by CPU2026 PDF formatter (unknown).  
Originally published on 2026-06-16.