SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX4770 M8, Intel Xeon 6768P, 2.40GHz

SPECrate®2026_int_base = 1180

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19
Test Sponsor: Fujitsu
Tested by: Fsas Technologies Inc.

Test Date: Jun-2026
Hardware Availability: Dec-2025
Software Availability: Apr-2026

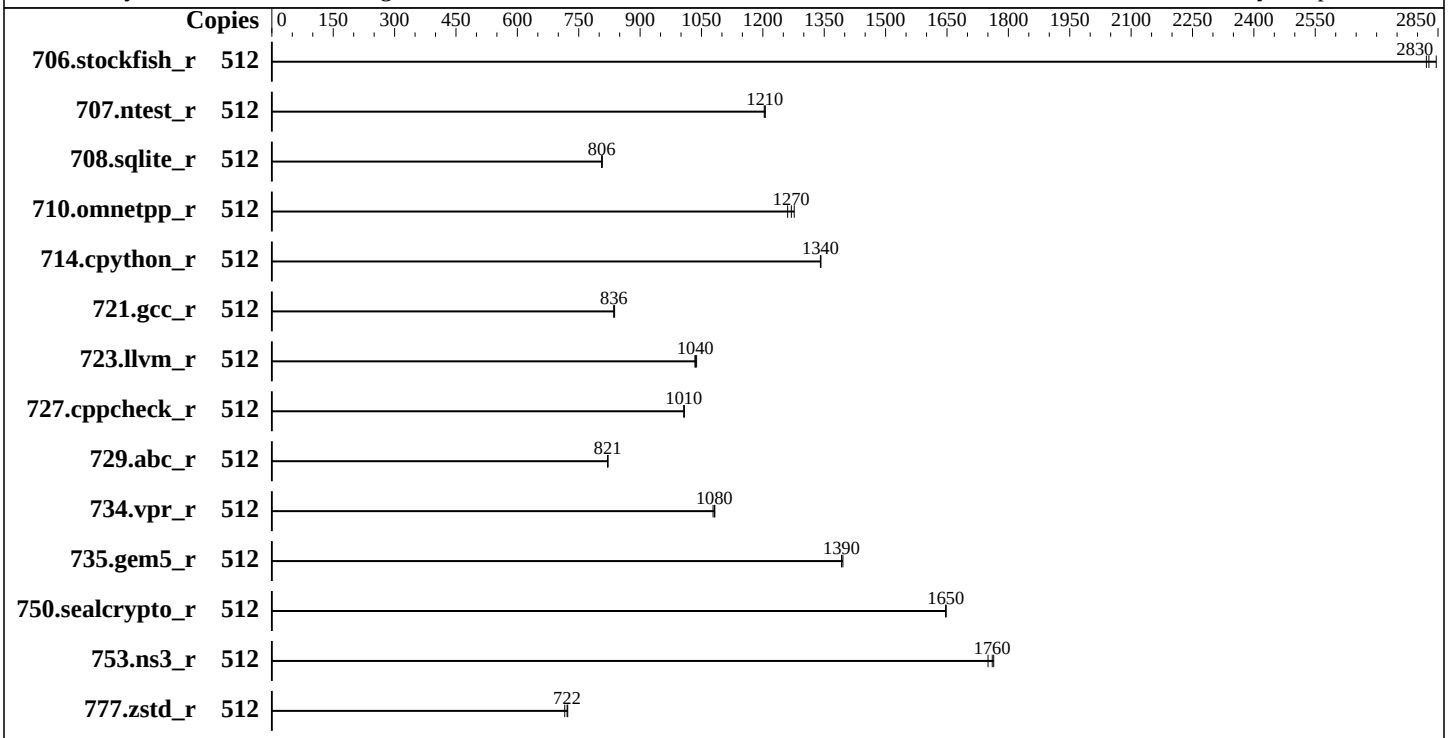

Hardware

CPU Name:	Intel Xeon 6768P
Max MHz:	3900
Nominal:	2400
Enabled:	256 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	336 MB I+D on chip per chip
Other:	None
Memory:	2 TB (32 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	1 x PCIe SSD, 1.92 TB
Cooling:	Air
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP7 6.4.0-150700.51-default
Compiler:	C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2026.0 of Intel Fortran Compiler for Linux
Compiler Category:	Vendor
Firmware:	Fsas Technologies Inc. BIOS Version V1.0.0.0 R1.3.0 for D4136-A1x. Released Apr-2026
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX4770 M8, Intel Xeon 6768P, 2.40GHz

SPECrate®2026_int_base = 1180

SPECrate®2026_int_peak = Not Run

CPU2026 License: 19
Test Sponsor: Fujitsu
Tested by: Fsas Technologies Inc.

Test Date: Jun-2026
Hardware Availability: Dec-2025
Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
706.stockfish_r	512	227	2850	**228**	**2830**	229	2820							
707.ntest_r	512	252	1200	**252**	**1210**	251	1210							
708.sqlite_r	512	**335**	**806**	335	808	335	806							
710.omnetpp_r	512	195	1280	197	1260	**196**	**1270**							
714.cpython_r	512	183	1340	**183**	**1340**	183	1340							
721.gcc_r	512	420	836	**420**	**836**	419	838							
723.llvm_r	512	251	1030	250	1040	**251**	**1040**							
727.cppcheck_r	512	182	1010	**183**	**1010**	183	1010							
729.abc_r	512	286	821	286	821	**286**	**821**							
734.vpr_r	512	**218**	**1080**	219	1080	218	1080							
735.gem5_r	512	179	1390	**179**	**1390**	179	1400							
750.sealcrypto_r	512	**167**	**1650**	167	1650	167	1650							
753.ns3_r	512	**178**	**1760**	178	1760	179	1750							
777.zstd_r	512	**457**	**722**	461	716	456	723							

SPECrate®2026_int_base = 1180

SPECrate®2026_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/cpu2026/lib"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using CentOS Stream 9.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
```

(Continued on next page)

General Notes (Continued)

```
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Platform Notes

```
BIOS Settings:
Fan Control = Full
SNC (Sub NUMA) = Enabled
CPU Performance Boost = Aggressive
DCU Streamer Prefetcher = Disabled
UPI Link Frequency Select = 16.0GT/s
XPT Prefetch = Disabled

BIOS Date reported by dmidecode represents the internal BIOS build date.

Sysinfo program /home/Benchmark/cpu2026/bin/sysinfo
Rev: 779ab21020787073335a329f3a45e2cd
running on localhost Mon Jun 22 17:43:29 2026

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -srvm
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
```

(Continued on next page)

Platform Notes (Continued)

```
 21. dmidecode
 22. BIOS
------------------------------------------------------------

------------------------------------------------------------
 1. uname -srvm
   Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64

------------------------------------------------------------
 2. w
    17:43:29 up 2 min,  1 user,  load average: 8.38, 6.10, 2.44
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   root     tty1     -                17:42    9.00s  2.04s  0.33s -bash

------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

------------------------------------------------------------
 4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority             (-e) 0
   file size               (blocks, -f) unlimited
   pending signals                 (-i) 8254287
   max locked memory       (kbytes, -l) 8192
   max memory size         (kbytes, -m) unlimited
   open files                      (-n) 1024
   pipe size            (512 bytes, -p) 8
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 8254287
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
 5. sysinfo process ancestry
  /usr/lib/systemd/systemd --switched-root --system --deserialize=42
  login -- root
  -bash
  -bash
  runcpu --nobuild --action validate --define default-platform-flags --copies 512 -c
    ic2026.0-graniterapids-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define cores=256 --define
    physicalfirst --define invoke_with_interleave --define drop_caches --tune base -o all -n 3 intrate
  runcpu --nobuild --action validate --define default-platform-flags --copies 512 --configfile
```

(Continued on next page)

Platform Notes (Continued)

```
   ic2026.0-graniterapids-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define cores=256 --define
   physicalfirst --define invoke_with_interleave --define drop_caches --tune base --output_format all
   --iterations 3 --nopower --runmode rate --tune base --size refrate intrate --nopreenv --note-preenv
   --logfile $SPEC/tmp/CPU2026.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/cpu2026

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6768P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x1000405
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
    cpu cores       : 64
    siblings        : 128
    4 physical ids (chips)
    512 processors (hardware threads)
    physical id 0: core ids 0-31,64-95
    physical id 1: core ids 0-31,64-95
    physical id 2: core ids 0-31,64-95
    physical id 3: core ids 0-31,64-95
    physical id 0: apicids 0-63,128-191
    physical id 1: apicids 256-319,384-447
    physical id 2: apicids 512-575,640-703
    physical id 3: apicids 768-831,896-959
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.40.4:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               512
  On-line CPU(s) list:                  0-511
  Vendor ID:                            GenuineIntel
  Model name:                           Intel(R) Xeon(R) 6768P
  CPU family:                           6
  Model:                                173
  Thread(s) per core:                   2
  Core(s) per socket:                   64
```

(Continued on next page)

Platform Notes (Continued)

```
  Socket(s):                          4
  Stepping:                           1
  CPU(s) scaling MHz:                 21%
  CPU max MHz:                        3900.0000
  CPU min MHz:                        800.0000
  BogoMIPS:                           4800.00
  Flags:                              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                      pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                      pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                      nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                      pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                                      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                      tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                      3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                                      ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                                      vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                                      rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                                      intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                                      xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                      split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                      arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi
                                      umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
                                      avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                                      cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk
                                      pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                                      arch_capabilities
  Virtualization:                     VT-x
  L1d cache:                          12 MiB (256 instances)
  L1i cache:                          16 MiB (256 instances)
  L2 cache:                           512 MiB (256 instances)
  L3 cache:                           1.3 GiB (4 instances)
  NUMA node(s):                       8
  NUMA node0 CPU(s):                  0-31,256-287
  NUMA node1 CPU(s):                  32-63,288-319
  NUMA node2 CPU(s):                  64-95,320-351
  NUMA node3 CPU(s):                  96-127,352-383
  NUMA node4 CPU(s):                  128-159,384-415
  NUMA node5 CPU(s):                  160-191,416-447
  NUMA node6 CPU(s):                  192-223,448-479
  NUMA node7 CPU(s):                  224-255,480-511
  Vulnerability Gather data sampling: Not affected
  Vulnerability Itlb multihit:        Not affected
  Vulnerability L1tf:                 Not affected
  Vulnerability Mds:                  Not affected
  Vulnerability Meltdown:             Not affected
  Vulnerability Mmio stale data:      Not affected
  Vulnerability Reg file data sampling: Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
   Vulnerability Retbleed:                 Not affected
   Vulnerability Spec rstack overflow:     Not affected
   Vulnerability Spec store bypass:        Mitigation; Speculative Store Bypass disabled via prctl
   Vulnerability Spectre v1:               Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:               Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                           PBRSB-eIBRS Not affected; BHI BHI_DIS_S
   Vulnerability Srbds:                    Not affected
   Vulnerability Tsx async abort:          Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
      L1d       48K      12M   12 Data            1     64        1             64
      L1i       64K      16M   16 Instruction     1     64        1             64
      L2         2M     512M   16 Unified         2   2048        1             64
      L3       336M     1.3G   16 Unified         3 344064        1             64

 ------------------------------------------------------------
 8. numactl --hardware
 NOTE: a numactl 'node' might or might not correspond to a physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0-31,256-287
   node 0 size: 257572 MB
   node 0 free: 256736 MB
   node 1 cpus: 32-63,288-319
   node 1 size: 258030 MB
   node 1 free: 257301 MB
   node 2 cpus: 64-95,320-351
   node 2 size: 258030 MB
   node 2 free: 256960 MB
   node 3 cpus: 96-127,352-383
   node 3 size: 258030 MB
   node 3 free: 257163 MB
   node 4 cpus: 128-159,384-415
   node 4 size: 258030 MB
   node 4 free: 257218 MB
   node 5 cpus: 160-191,416-447
   node 5 size: 258030 MB
   node 5 free: 257215 MB
   node 6 cpus: 192-223,448-479
   node 6 size: 258030 MB
   node 6 free: 257252 MB
   node 7 cpus: 224-255,480-511
   node 7 size: 257841 MB
   node 7 free: 257060 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  12  21  21  21  21  21  21
```

(Continued on next page)

Platform Notes (Continued)

```
     1:  12  10  21  21  21  21  21  21
     2:  21  21  10  12  21  21  21  21
     3:  21  21  12  10  21  21  21  21
     4:  21  21  21  21  10  12  21  21
     5:  21  21  21  21  12  10  21  21
     6:  21  21  21  21  21  21  10  12
     7:  21  21  21  21  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       2113125072 kB

------------------------------------------------------------
10. who -r
  run-level 3 Jun 22 17:42

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
                     issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections
                   nvmf-autoconnect postfix purge-kernels rollback rsyslog sep5 smartd sshd systemd-pstore
                     wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                    chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                   firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
                    man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
                     smartd_generate_opts snmpd snmptrapd sysstat systemd-boot-check-no-failures
                    systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                     systemd-timesyncd vncserver@
  indirect           systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
  root=UUID=2066019a-dbc1-4a27-addf-ad53fb60bbb7
  splash=silent
  quiet
  security=apparmor
  mitigations=auto
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 240:
    current policy: frequency should be within 800 MHz and 3.90 GHz.
                    The governor "powersave" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
```

(Continued on next page)

Platform Notes (Continued)

```
   scan_sleep_millisecs    10000

 ------------------------------------------------------------
 18. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP7

 ------------------------------------------------------------
 19. Disk information
 SPEC is set to: /home/Benchmark/cpu2026
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/nvme0n1p3 xfs   852G   72G  780G   9% /home

 ------------------------------------------------------------
 20. /sys/devices/virtual/dmi/id
     Vendor:         Fsas Technologies
     Product:        PRIMERGY RX4770 M8
     Product Family: SERVER
     Serial:         xxxxxxxxxx

 ------------------------------------------------------------
 21. dmidecode
   Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
      32x Micron MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Fsas Technologies
    BIOS Version:      V1.0.0.0 R1.3.0 for D4136-A1x
    BIOS Date:         03/13/2026
    BIOS Revision:     1.3
    Firmware Revision: 3.13
```

Compiler Version Notes

```
==============================================================================
C      | 708.sqlite_r(base) 714.cpython_r(base) 777.zstd_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++    | 706.stockfish_r(base) 707.ntest_r(base) 727.cppcheck_r(base)
       | 753.ns3_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C | 710.omnetpp_r(base) 721.gcc_r(base) 723.llvm_r(base) 729.abc_r(base)
       | 734.vpr_r(base) 735.gem5_r(base) 750.sealcrypto_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Benchmarks using both C and C++:
icpx icx

Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fno-strict-aliasing -L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc

C++ benchmarks:
-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500 -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fno-strict-aliasing
-L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html
http://www.spec.org/cpu2026/results/flags/Fsas-Platform-Settings-V1.0-GNR-RevC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml
http://www.spec.org/cpu2026/results/flags/Fsas-Platform-Settings-V1.0-GNR-RevC.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-06-22 04:43:28-0400.
Report generated on 2026-08-11 15:34:47 by CPU2026 PS formatter (86729d3b).
Originally published on 2026-07-28.