



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECspeed®2026_fp_base = 11.1

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2026

Hardware Availability: Aug-2024

Software Availability: Apr-2026

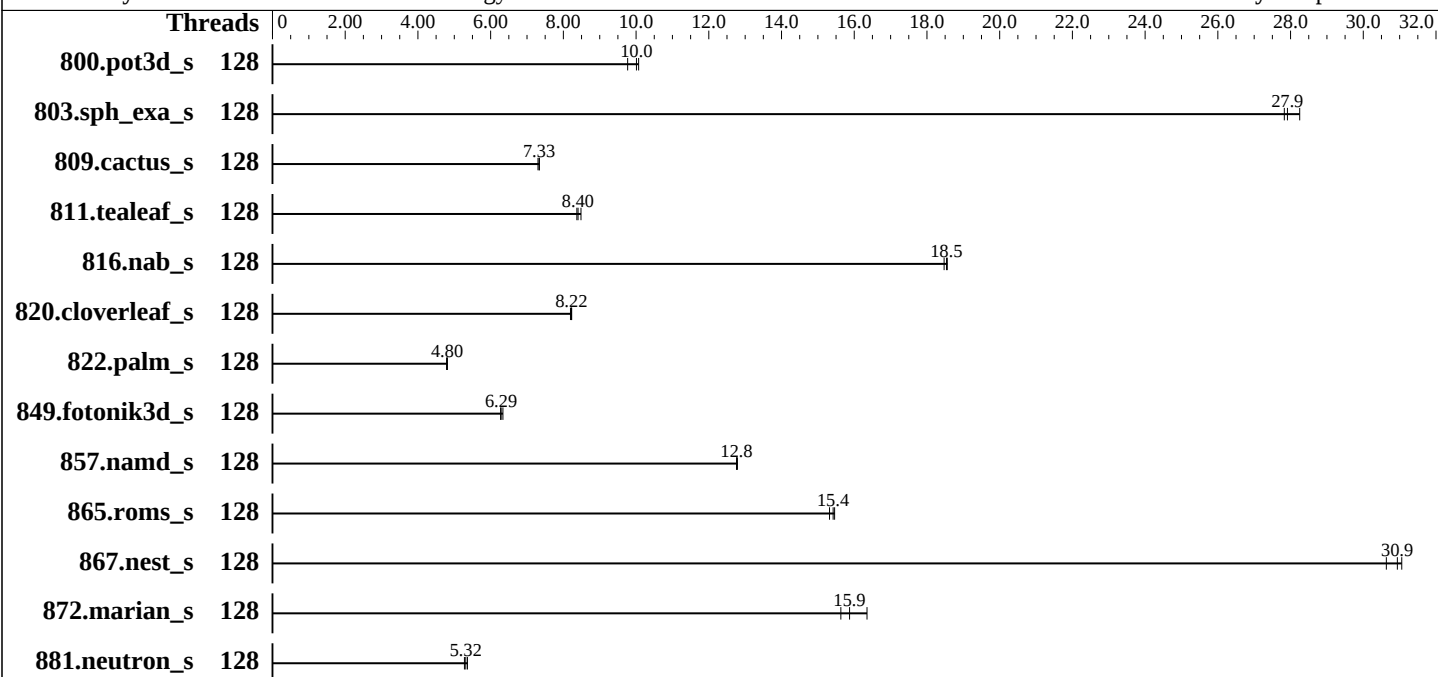

Hardware

CPU Name: Intel Xeon Platinum 8593Q
Max MHz: 3900
Nominal: 2200
Enabled: 128 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 320 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R)
Storage: 1 x 960 GB NVME SSD
Cooling: DLC
Other: None

Software

OS: SUSE Linux Enterprise Server 16.0
Kernel 6.12.0-160000.5-default
Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2026.0 of Intel Fortran Compiler for Linux
Compiler Category: Vendor
Firmware: Lenovo BIOS Version ESE139F 3.90 released May-2026
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator v5.3
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECspeed®2026_fp_base = 11.1

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2026

Hardware Availability: Aug-2024

Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
800.pot3d_s	128	68.9	9.77	66.8	10.1	<u>67.2</u>	<u>10.0</u>							
803.sph_exa_s	128	43.8	28.3	44.5	27.8	<u>44.4</u>	<u>27.9</u>							
809.cactus_s	128	153	7.34	<u>153</u>	<u>7.33</u>	154	7.30							
811.tealeaf_s	128	65.6	8.48	66.5	8.37	<u>66.3</u>	<u>8.40</u>							
816.nab_s	128	<u>60.7</u>	<u>18.5</u>	60.7	18.6	61.0	18.5							
820.cloverleaf_s	128	<u>104</u>	<u>8.22</u>	104	8.23	105	8.20							
822.palm_s	128	256	4.79	<u>256</u>	<u>4.80</u>	255	4.81							
849.fotonik3d_s	128	<u>105</u>	<u>6.29</u>	105	6.27	104	6.34							
857.namd_s	128	<u>114</u>	<u>12.8</u>	114	12.8	114	12.8							
865.roms_s	128	<u>70.7</u>	<u>15.4</u>	71.1	15.3	70.5	15.5							
867.nest_s	128	69.5	31.1	70.5	30.6	<u>69.8</u>	<u>30.9</u>							
872.marian_s	128	<u>68.2</u>	<u>15.9</u>	69.2	15.6	66.2	16.4							
881.neutron_s	128	<u>153</u>	<u>5.32</u>	152	5.36	154	5.28							

SPECspeed®2026_fp_base = 11.1

SPECspeed®2026_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/cpu2026-1.0.1-ic2026.0/lib"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2026_fp_base = 11.1

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2026

Hardware Availability: Aug-2024

Software Availability: Apr-2026

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the CentOS Stream 9, and the system compiler gcc 11.5.0

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

Adjacent Cache Prefetch set to Disabled

HyperThreading set to Disabled

C-States set to Legacy

AMP Prefetch set to Enabled

Misc set to Option4

Sysinfo program /home/cpu2026-1.0.1-ic2026.0/bin/sysinfo

Rev: 779ab21020787073335a329f3a45e2cd

running on localhost Fri Jul 10 19:00:10 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

-
1. uname -srv
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)
 11. Services, from systemctl list-unit-files
 12. Linux kernel boot-time arguments, from /proc/cmdline
 13. cpupower frequency-info
 14. sysctl
 15. /sys/kernel/mm/transparent_hugepage
 16. /sys/kernel/mm/transparent_hugepage/khugepaged
 17. OS release
 18. Disk information
 19. /sys/devices/virtual/dmi/id
 20. dmidecode
 21. BIOS

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECspeed®2026_fp_base = 11.1

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2026

Hardware Availability: Aug-2024

Software Availability: Apr-2026

Platform Notes (Continued)

1. uname -srvm

```
Linux 6.12.0-160000.5-default #1 SMP PREEMPT_DYNAMIC Wed Sep 10 15:26:25 UTC 2025 (3545bbd) x86_64
```

2. w

```
19:00:10 up 10 min, 1 user, load average: 0.15, 1.23, 0.83
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root                 10.245.48.115  18:59             0.00s  0.02s sshd-session: root [priv]
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) unlimited
data seg size               (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                   (blocks, -f) unlimited
pending signals              (-i) 2061598
max locked memory           (kbytes, -l) 8192
max memory size              (kbytes, -m) unlimited
open files                  (-n) 1024
pipe size                   (512 bytes, -p) 8
POSIX message queues        (bytes, -q) 819200
real-time priority          (-r) 0
stack size                  (kbytes, -s) unlimited
cpu time                    (seconds, -t) unlimited
max user processes          (-u) 2061598
virtual memory               (kbytes, -v) unlimited
file locks                  (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=47
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd-session: root [priv]
sshd-session: root@notty
/bin/bash ./02.remote_local_SPECcpu_1.02.sh
sh Run553-compliant-ic2026.0-lin-sapphirerapids-speedfp-base-smt-off-20260429.sh
runcpu --nobuild --iterations=3 --reportable --action validate --define default-platform-flags -c
ic2026.0-sapphirerapids-cpu2026-1.0.1-speed-20260429.cfg --threads 128 --define cores=128 --tune base -o
all --define drop_caches fpspeed
```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECspeed®2026_fp_base = 11.1

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2026

Hardware Availability: Aug-2024

Software Availability: Apr-2026

Platform Notes (Continued)

```
runcpu --nobuild --iterations 3 --reportable --action validate --define default-platform-flags --configfile
ic2026.0-sapphirerapids-cpu2026-1.0.1-speed-20260429.cfg --threads 128 --define cores=128 --tune base
--output_format all --define drop_caches --nopower --runmode speed --tune base --size refspeed fpspeed
--nopreenv --note-preenv --logfile $SPEC/tmp/CPU2026.040/templogs/preenv.fpspeed.040.0.log --lognum 040.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026-1.0.1-ic2026.0
```

6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) PLATINUM 8593Q
vendor_id       : GenuineIntel
cpu family      : 6
model           : 207
stepping        : 2
microcode       : 0x210002d3
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi spectre_v2_user
cpu cores       : 64
siblings        : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0:  core ids 0-63
physical id 1:  core ids 0-63
physical id 0:  apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126
physical id 1:  apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
2,234,236,238,240,242,244,246,248,250,252,254
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.41.1:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	46 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	128
On-line CPU(s) list:	0-127
Vendor ID:	GenuineIntel
Model name:	INTEL(R) XEON(R) PLATINUM 8593Q
CPU family:	6
Model:	207

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECspeed®2026_fp_base = 11.1

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2026

Hardware Availability: Aug-2024

Software Availability: Apr-2026

Platform Notes (Continued)

Thread(s) per core: 1
Core(s) per socket: 64
Socket(s): 2
Stepping: 2
CPU(s) scaling MHz: 21%
CPU max MHz: 3900.0000
CPU min MHz: 800.0000
BogoMIPS: 4400.00

Flags:

fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma
cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin
cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep
bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni
avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi vnmi avx512vbmi
umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
amx_tile amx_int8 flush_l1d arch_capabilities

Virtualization: VT-x
L1d cache: 6 MiB (128 instances)
L1i cache: 4 MiB (128 instances)
L2 cache: 256 MiB (128 instances)
L3 cache: 640 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-63
NUMA node1 CPU(s): 64-127
Vulnerability Gather data sampling: Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECspeed®2026_fp_base = 11.1

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2026

Hardware Availability: Aug-2024

Software Availability: Apr-2026

Platform Notes (Continued)

Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; PBRSE-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsa:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	320M	640M	20	Unified	3	262144	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-63

node 0 size: 257688 MB

node 0 free: 256434 MB

node 1 cpus: 64-127

node 1 size: 257943 MB

node 1 free: 257092 MB

node distances:

node 0 1

0: 10 21

1: 21 10

9. /proc/meminfo

MemTotal: 528006660 kB

'who -r' did not return a run level

10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)

Default Target Status

graphical running

11. Services, from systemctl list-unit-files

STATE

UNIT FILES

enabled	NetworkManager	NetworkManager-dispatcher	NetworkManager-wait-online	audit-rules	auditd	chronyd	dbus-broker	firewalld	getty@	irqbalance	issue-generator	kbdsettings	klog	lvm2-monitor	rollback	rsyslog	smartd	soft-reboot-cleanup	sshd	systemd-pstore
---------	----------------	---------------------------	----------------------------	-------------	--------	---------	-------------	-----------	--------	------------	-----------------	-------------	------	--------------	----------	---------	--------	---------------------	------	----------------

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECspeed®2026_fp_base = 11.1

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2026

Hardware Availability: Aug-2024

Software Availability: Apr-2026

Platform Notes (Continued)

```
wpa_supplicant wtmpdb-update-boot
enabled-runtime systemd-remount-fs
disabled blk-availability boot-sysctl ca-certificates ca-certificates-setup chrony-wait
console-getty debug-shell dnsmasq exchange-bmc-os-info gpm grub2-once ipmiev
issue-add-ssh-keys kernel-sysctl kexec-load lastlog2-import lunmask lvm-devices-import
man-db-create multipathd nftables nis-domainname rpmconfigcheck rsyncd serial-getty@
setup-systemd-proxy-env smartd_generate_opts snmpd snmptrapd
systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd systemd-udev-load-credentials udisks2
indirect wpa_supplicant@
systemd-userdbd
```

12. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.12.0-160000.5-default
root=UUID=947e53e0-d208-4ab7-9188-9ca936e60a3f
mitigations=auto
quiet
security=selinux
selinux=1
```

13. cpupower frequency-info

```
analyzing CPU 2:
  current policy: frequency should be within 800 MHz and 3.90 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
```

14. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECspeed®2026_fp_base = 11.1

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2026

Hardware Availability: Aug-2024

Software Availability: Apr-2026

Platform Notes (Continued)

```
vm.nr_overcommit_hugepages      0
vm.swappiness                    60
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0
```

15. /sys/kernel/mm/transparent_hugepage

```
defrag          always defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

16. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000
```

17. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 16.0
```

18. Disk information

SPEC is set to: /home/cpu2026-1.0.1-ic2026.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	445G	156G	289G	35%	/home

19. /sys/devices/virtual/dmi/id

```
Vendor:      Lenovo
Product:     ThinkSystem SR650 V3 MB,EGS,DDR5,SH,2U
Product Family: ThinkSystem
Serial:      1234567890
```

20. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECspeed®2026_fp_base = 11.1

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2026

Hardware Availability: Aug-2024

Software Availability: Apr-2026

Platform Notes (Continued)

Memory:

16x Samsung M321R4GA3PB0-CWMXH 32 GB 2 rank 5600

21. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo

BIOS Version: ESE139F-3.90

BIOS Date: 05/14/2026

BIOS Revision: 3.90

Firmware Revision: 8.10

Compiler Version Notes

```
=====  
C      | 811.tealeaf_s(base) 816.nab_s(base) 881.neutron_s(base)  
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++    | 803.sph_exa_s(base) 857.namd_s(base) 867.nest_s(base)  
      | 872.marian_s(base)  
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++, C | 809.cactus_s(base)  
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.  
-----
```

```
=====  
Fortran | 800.pot3d_s(base) 820.cloverleaf_s(base) 822.palm_s(base)  
      | 849.fotonik3d_s(base) 865.roms_s(base)  
-----
```

```
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2026.0.0 Build 20260331
```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2026_fp_base = 11.1

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2026

Hardware Availability: Aug-2024

Software Availability: Apr-2026

Compiler Version Notes (Continued)

Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both C and C++:

icpx icx

Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xsapphirerapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

C++ benchmarks:

-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xsapphirerapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -pthread
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

Fortran benchmarks:

-m64 -stand f18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xsapphirerapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -DSPEC_OPENMP
-fiopenmp -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

Benchmarks using both C and C++:

-m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500 -xsapphirerapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-pthread -L/usr/local/jemalloc-5.3.0/lib -ljemalloc



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECspeed®2026_fp_base = 11.1

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2026

Hardware Availability: Aug-2024

Software Availability: Apr-2026

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/Lenovo-Platform-SPECcpu2026-Flags-V1.2-Eaglestream-AG.html>

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/Lenovo-Platform-SPECcpu2026-Flags-V1.2-Eaglestream-AG.xml>

<http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-07-10 07:00:09-0400.

Report generated on 2026-08-11 15:35:36 by CPU2026 PDF formatter (unknown).

Originally published on 2026-07-30.