



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECrate®2026_int_base = 748

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECrate®2026_int_peak = Not Run

CPU2026 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

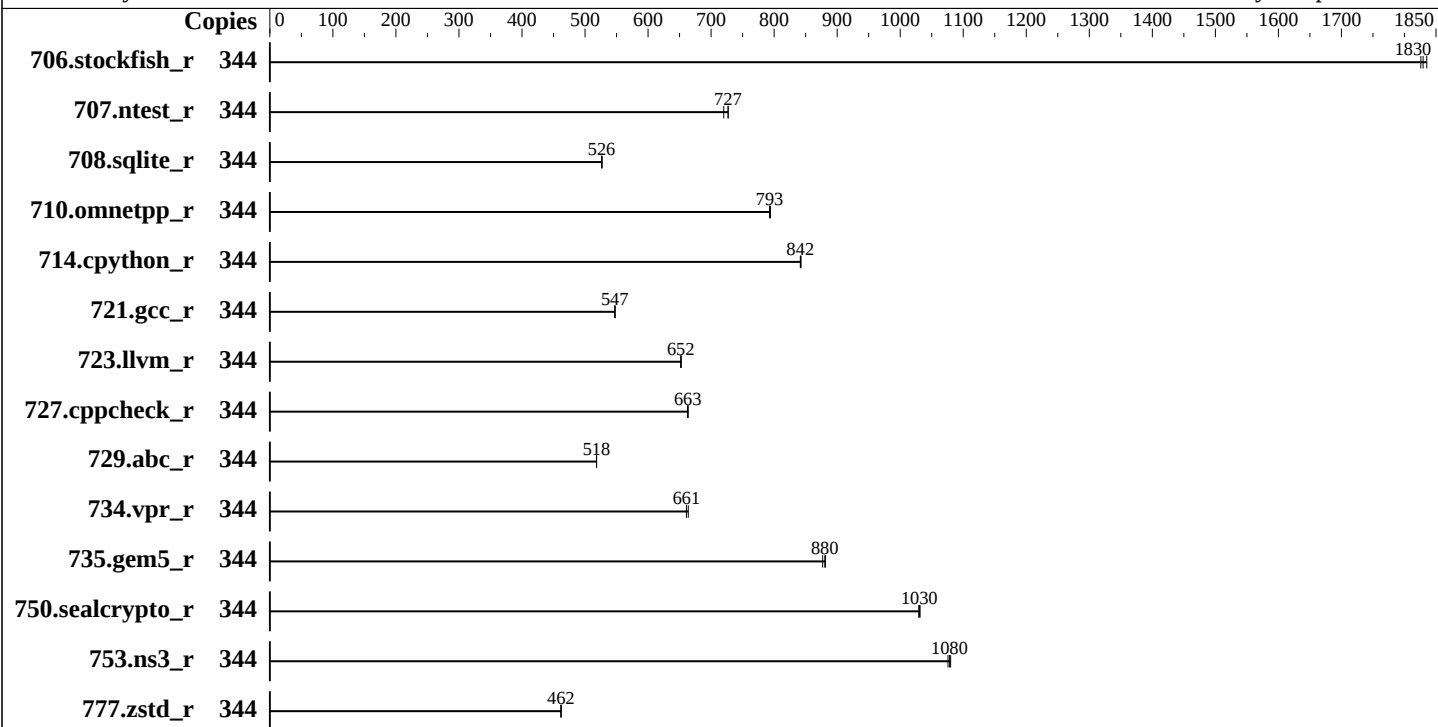

Hardware

CPU Name: Intel Xeon 6787P
Max MHz: 3800
Nominal: 2000
Enabled: 172 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 336 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-88/64B-H, running at 8000)
Storage: 1 x 3.84 TB SATA SSD
Cooling: Air
Other: None

Software

OS: Red Hat Enterprise Linux 9.4 (Plow)
5.14.0-427.13.1.el9_4.x86_64
Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2026.0 of Intel Fortran Compiler for Linux
Compiler Category: Vendor
Firmware: Version 01.31.02.23 released May-2026
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECrate®2026_int_base = 748

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECrate®2026_int_peak = Not Run

CPU2026 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2026
Hardware Availability: May-2025
Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
706.stockfish_r	344	<u>237</u>	<u>1830</u>	237	1830	236	1840							
707.ntest_r	344	<u>280</u>	<u>727</u>	283	720	280	727							
708.sqlite_r	344	345	526	345	527	<u>345</u>	<u>526</u>							
710.omnetpp_r	344	<u>211</u>	<u>793</u>	211	794	211	793							
714.cpython_r	344	196	842	<u>196</u>	<u>842</u>	196	843							
721.gcc_r	344	431	548	431	547	<u>431</u>	<u>547</u>							
723.llvm_r	344	<u>267</u>	<u>652</u>	267	653	268	652							
727.cppcheck_r	344	<u>186</u>	<u>663</u>	186	663	186	664							
729.abc_r	344	305	518	<u>305</u>	<u>518</u>	305	518							
734.vpr_r	344	240	661	<u>240</u>	<u>661</u>	239	664							
735.gem5_r	344	<u>190</u>	<u>880</u>	191	877	190	881							
750.sealcrypto_r	344	179	1030	179	1030	<u>179</u>	<u>1030</u>							
753.ns3_r	344	<u>196</u>	<u>1080</u>	195	1080	196	1080							
777.zstd_r	344	480	462	<u>480</u>	<u>462</u>	480	462							

SPECrate®2026_int_base = 748

SPECrate®2026_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
tuned-adm profile was set to throughput-performance using "tuned-adm profile throughput-performance"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2026/lib"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.
Transparent Huge Pages enabled by default

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECrate®2026_int_base = 748

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECrate®2026_int_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

General Notes (Continued)

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Performance Profile Set to Performance

LLC Prefetch Set to Enabled

DCU Streamer Prefetcher Set to Disabled

Latency Optimized Mode Set to Enabled

Sysinfo program /home/cpu2026/bin/sysinfo

Rev: 779ab21020787073335a329f3a45e2cd

running on localhost Tue Jul 21 02:00:15 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -srvm
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-32.el9_4)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECrate®2026_int_base = 748

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECrate®2026_int_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

Platform Notes (Continued)

18. /sys/kernel/mm/transparent_hugepage/khugepaged

19. OS release

20. Disk information

21. /sys/devices/virtual/dmi/id

22. dmidecode

23. BIOS

1. uname -srmv

Linux 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT 2024 x86_64

2. w

02:00:15 up 5:30, 1 user, load average: 230.89, 314.44, 328.60

USER	TTY	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	tty1	20:31	5:28m	1.55s	0.00s	sh loop.sh

3. Username

From environment variable \$USER: root

4. ulimit -a

real-time non-blocking time	(microseconds, -R)	unlimited
core file size	(blocks, -c)	0
data seg size	(kbytes, -d)	unlimited
scheduling priority	(-e)	0
file size	(blocks, -f)	unlimited
pending signals	(-i)	4123934
max locked memory	(kbytes, -l)	64
max memory size	(kbytes, -m)	unlimited
open files	(-n)	1024
pipe size	(512 bytes, -p)	8
POSIX message queues	(bytes, -q)	819200
real-time priority	(-r)	0
stack size	(kbytes, -s)	unlimited
cpu time	(seconds, -t)	unlimited
max user processes	(-u)	4123934
virtual memory	(kbytes, -v)	unlimited
file locks	(-x)	unlimited

5. sysinfo process ancestry

/usr/lib/systemd/systemd --switched-root --system --deserialize 31
login -- root
-bash

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECrate®2026_int_base = 748

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECrate®2026_int_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

Platform Notes (Continued)

```
sh loop.sh
sh rate-2026-t.sh
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 344 -c
ic2026.0-graniterapids-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define cores=172 --define
physicalfirst --define invoke_with_interleave --define drop_caches -o all intrate --tune base
runcpu --nobuild --reportable --action validate --define default-platform-flags --copies 344 --configfile
ic2026.0-graniterapids-cpu2026-1.0.1-rate-20260429.cfg --define smt-on --define cores=172 --define
physicalfirst --define invoke_with_interleave --define drop_caches --output_format all --tune base
--nopower --runmode rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.002/temlogs/preenv.intrate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6787P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 173
stepping        : 1
microcode       : 0x1000405
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 86
siblings        : 172
2 physical ids (chips)
344 processors (hardware threads)
physical id 0:  core ids 0-42,64-106
physical id 1:  core ids 0-42,64-106
physical id 0:  apicids 0-85,128-213
physical id 1:  apicids 256-341,384-469
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            344
On-line CPU(s) list: 0-343
Vendor ID:         GenuineIntel
BIOS Vendor ID:    Intel(R) Corporation
Model name:        Intel(R) Xeon(R) 6787P
BIOS Model name:   Intel(R) Xeon(R) 6787P
```

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECrate®2026_int_base = 748

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECrate®2026_int_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

Platform Notes (Continued)

CPU family: 6
Model: 173
Thread(s) per core: 2
Core(s) per socket: 86
Socket(s): 2
Stepping: 1
Frequency boost: enabled
CPU(s) scaling MHz: 100%
CPU max MHz: 2001.0000
CPU min MHz: 800.0000
BogoMIPS: 4000.00

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsave cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities

Virtualization: VT-x
L1d cache: 8.1 MiB (172 instances)
L1i cache: 10.8 MiB (172 instances)
L2 cache: 344 MiB (172 instances)
L3 cache: 672 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-42,172-214
NUMA node1 CPU(s): 43-85,215-257
NUMA node2 CPU(s): 86-128,258-300
NUMA node3 CPU(s): 129-171,301-343
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECrate®2026_int_base = 748

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECrate®2026_int_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

Platform Notes (Continued)

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	8.1M	12	Data	1	64	1	64
L1i	64K	10.8M	16	Instruction	1	64	1	64
L2	2M	344M	16	Unified	2	2048	1	64
L3	336M	672M	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-42,172-214
node 0 size: 257011 MB
node 0 free: 255721 MB
node 1 cpus: 43-85,215-257
node 1 size: 258026 MB
node 1 free: 256724 MB
node 2 cpus: 86-128,258-300
node 2 size: 257984 MB
node 2 free: 256692 MB
node 3 cpus: 129-171,301-343
node 3 size: 258000 MB
node 3 free: 256763 MB
node distances:
node  0  1  2  3
0:  10 12 21 21
1:  12 10 21 21
2:  21 21 10 12
3:  21 21 12 10
```

9. /proc/meminfo

MemTotal: 1055767696 kB

10. who -r

run-level 3 Jul 20 20:30

11. Systemd service manager version: systemd 252 (252-32.el9_4)

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECrate®2026_int_base = 748

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECrate®2026_int_peak = Not Run

CPU2026 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2026
Hardware Availability: May-2025
Software Availability: Apr-2026

Platform Notes (Continued)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond dbus-broker getty@ insights-client-boot irqbalance kdump low-memory-monitor mdmonitor microcode nis-domainname rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark sshd sssd systemd-boot-update systemd-network-generator tuned udisks2 upower
enabled-runtime	systemd-remount-fs
disabled	canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait chronyd-restricted console-getty cpupower debug-shell dnf-system-upgrade firewalld kvm_stat man-db-restart-cache-update nftables pesign rdisc rhcd rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=(hd0,gpt3)/boot/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
root=UUID=6e68be6b-7476-48d7-b5fd-4f52d789df33
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=UUID=b288481a-71cc-4ab0-8cb3-70564a1c1698

14. cpupower frequency-info

analyzing CPU 267:
current policy: frequency should be within 800 MHz and 2.00 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. tuned-adm active

Current active profile: throughput-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECrate®2026_int_base = 748

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECrate®2026_int_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

Platform Notes (Continued)

vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	40
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	10
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

17. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.4 (Plow)
redhat-release Red Hat Enterprise Linux release 9.4 (Plow)
system-release Red Hat Enterprise Linux release 9.4 (Plow)

20. Disk information
SPEC is set to: /home/cpu2026
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 1.0T 70G 955G 7% /

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECrate®2026_int_base = 748

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECrate®2026_int_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

Platform Notes (Continued)

21. /sys/devices/virtual/dmi/id
Vendor: XFUSION
Product: 1288 V8
Product Family: Birch Stream

22. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

1x Hynix HMC94BDJHA380N 64 GB 2 rank 8800, configured at 8000
2x Hynix HMC94BDJHA383N 64 GB 2 rank 8800, configured at 8000
6x Hynix HMC94BDJHA462N 64 GB 2 rank 8800, configured at 8000
7x Hynix HMC94BDJHA464N 64 GB 2 rank 8800, configured at 8000

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: XFUSION
BIOS Version: 01.31.02.23
BIOS Date: 05/31/2026
BIOS Revision: 2.23

Compiler Version Notes

=====
C | 708.sqlite_r(base) 714.cpython_r(base) 777.zstd_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

=====
C++ | 706.stockfish_r(base) 707.ntest_r(base) 727.cppcheck_r(base)
753.ns3_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

=====

(Continued on next page)



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECrate®2026_int_base = 748

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECrate®2026_int_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

Compiler Version Notes (Continued)

C++, C | 710.omnetpp_r(base) 721.gcc_r(base) 723.llvm_r(base) 729.abc_r(base)
| 734.vpr_r(base) 735.gem5_r(base) 750.sealcrypto_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Benchmarks using both C and C++:
icpx icx

Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fno-strict-aliasing -L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc

C++ benchmarks:
-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500 -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fno-strict-aliasing
-L/opt/intel/oneapi/compiler/2026.0/lib -lqkmalloc



SPEC CPU®2026 Integer Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECrate®2026_int_base = 748

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECrate®2026_int_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/xFusion-Platform-Settings-GNR-V1.7.html>

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64.2026-08-11.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/xFusion-Platform-Settings-GNR-V1.7.xml>

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64.2026-08-11.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-07-20 14:00:14-0400.

Report generated on 2026-08-11 18:27:05 by CPU2026 PDF formatter (unknown).

Originally published on 2026-08-11.