



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.6

FusionServer 2288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

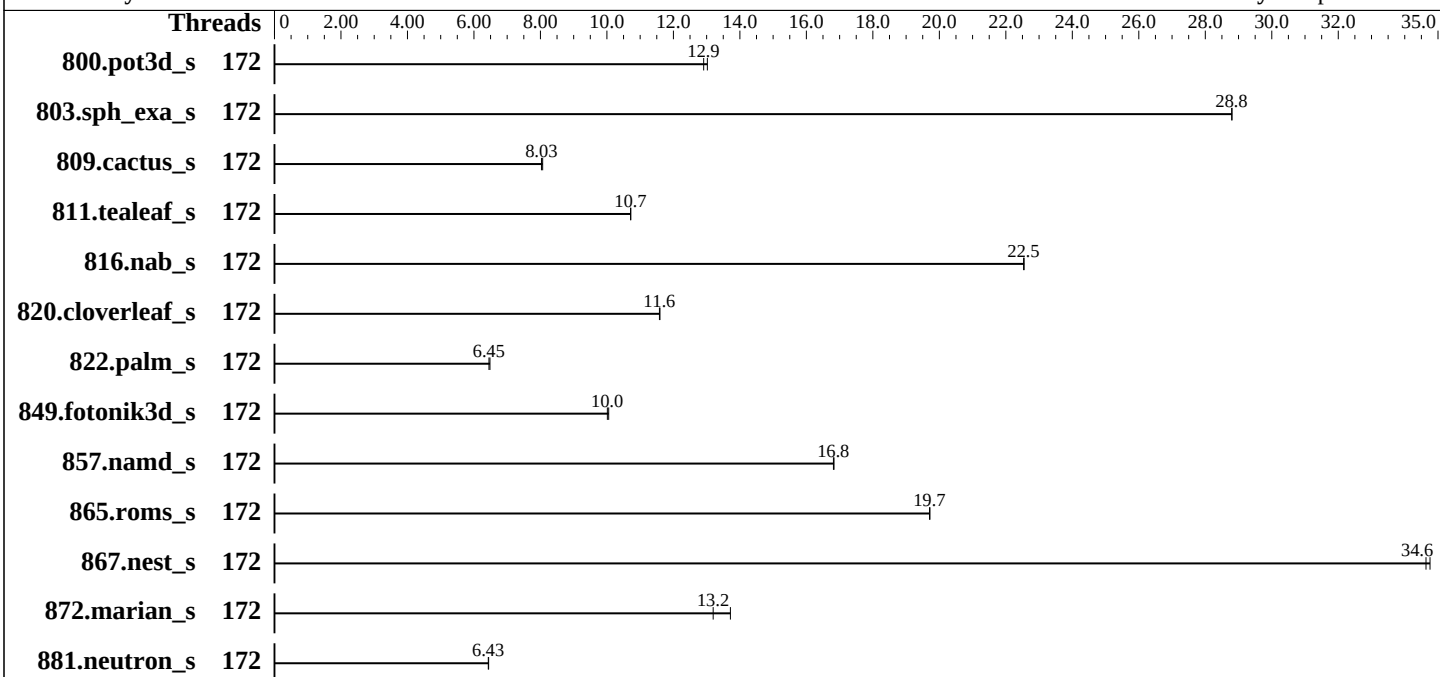

Hardware

CPU Name: Intel Xeon 6787P
Max MHz: 3800
Nominal: 2000
Enabled: 172 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 336 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-88/64B-H, running at 8000)
Storage: 1 x 3.84 TB SATA SSD
Cooling: Air
Other: None

Software

OS: Red Hat Enterprise Linux 9.4 (Plow)
5.14.0-427.13.1.el9_4.x86_64
Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2026.0 of Intel Fortran Compiler for Linux
Compiler Category: Vendor
Firmware: Version 01.31.02.23 released May-2026
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator v5.3
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.6

FusionServer 2288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
800.pot3d_s	172	51.7	13.0	<u>52.1</u>	<u>12.9</u>									
803.sph_exa_s	172	43.0	28.8	43.0	28.8									
809.cactus_s	172	139	8.07	140	8.03									
811.tealeaf_s	172	52.0	10.7	<u>52.0</u>	<u>10.7</u>									
816.nab_s	172	49.9	22.6	50.0	22.5									
820.cloverleaf_s	172	74.0	11.6	73.9	11.6									
822.palm_s	172	190	6.45	189	6.48									
849.fotonik3d_s	172	65.9	10.0	65.6	10.1									
857.namd_s	172	86.3	16.8	86.4	16.8									
865.roms_s	172	55.3	19.7	55.3	19.7									
867.nest_s	172	62.1	34.8	62.4	34.6									
872.marian_s	172	78.9	13.7	82.0	13.2									
881.neutron_s	172	127	6.44	127	6.43									

SPECspeed®2026_fp_base = 13.6

SPECspeed®2026_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

tuned-adm profile was set to throughput-performance using "tuned-adm profile throughput-performance"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/cpu2026/lib"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using CentOS Stream 9.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.6

FusionServer 2288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the CentOS Stream 9, and the system compiler gcc 11.5.0

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Performance Profile Set to Load Balance

Enable LP [Global] Set to Single LP

LLC Prefetch Set to Enabled

Adjacent Cache Prefetch Set to Disabled

SNC Set to Disabled

Latency Optimized Mode Set to Enabled

Sysinfo program /home/cpu2026/bin/sysinfo

Rev: 779ab21020787073335a329f3a45e2cd

running on localhost Wed Jul 22 15:41:59 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

-
1. `uname -srv`
 2. `w`
 3. Username
 4. `ulimit -a`
 5. `sysinfo process ancestry`
 6. `/proc/cpuinfo`
 7. `lscpu`
 8. `numactl --hardware`
 9. `/proc/meminfo`
 10. `who -r`
 11. Systemd service manager version: `systemd 252 (252-32.el9_4)`
 12. Services, from `systemctl list-unit-files`
 13. Linux kernel boot-time arguments, from `/proc/cmdline`
 14. `cpupower frequency-info`
 15. `tuned-adm active`
 16. `sysctl`
 17. `/sys/kernel/mm/transparent_hugepage`
 18. `/sys/kernel/mm/transparent_hugepage/khugepaged`
 19. OS release
 20. Disk information

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.6

FusionServer 2288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

Platform Notes (Continued)

21. /sys/devices/virtual/dmi/id

22. dmidecode

23. BIOS

1. uname -srvm

Linux 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT 2024 x86_64

2. w

15:41:59 up 1:43, 2 users, load average: 0.49, 29.71, 74.01

USER	TTY	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	tty1	14:00	11.00s	2.13s	0.04s	sh speed-2026.sh
root	pts/0	14:05	55.00s	0.04s	0.04s	-bash

3. Username

From environment variable \$USER: root

4. ulimit -a

real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4124405
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4124405
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry

/usr/lib/systemd/systemd --switched-root --system --deserialize 31

login -- root

-bash

sh speed-2026.sh

runcpu --nobuild --reportable --action validate --define default-platform-flags -c

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.6

FusionServer 2288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

Platform Notes (Continued)

```
ic2026.0-graniterapids-cpu2026-1.0.1-speed-20260429.cfg --threads 172 --define cores=172 -o all --define
drop_caches fpspeed --tune base
runcpu --nobuild --reportable --action validate --define default-platform-flags --configfile
ic2026.0-graniterapids-cpu2026-1.0.1-speed-20260429.cfg --threads 172 --define cores=172 --output_format
all --define drop_caches --tune base --nopower --runmode speed --tune base --size refspeed fpspeed
--nopreenv --note-preenv --logfile $SPEC/tmp/CPU2026.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6787P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 173
stepping        : 1
microcode       : 0x1000405
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 86
siblings        : 86
2 physical ids (chips)
172 processors (hardware threads)
physical id 0:  core ids 0-42,64-106
physical id 1:  core ids 0-42,64-106
physical id 0:  apicids
0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72
, 74, 76, 78, 80, 82, 84, 128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 160, 162, 164, 166, 168, 17
0, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212
physical id 1:  apicids
256, 258, 260, 262, 264, 266, 268, 270, 272, 274, 276, 278, 280, 282, 284, 286, 288, 290, 292, 294, 296, 298, 300, 302, 304, 306, 3
08, 310, 312, 314, 316, 318, 320, 322, 324, 326, 328, 330, 332, 334, 336, 338, 340, 384, 386, 388, 390, 392, 394, 396, 398, 400, 40
2, 404, 406, 408, 410, 412, 414, 416, 418, 420, 422, 424, 426, 428, 430, 432, 434, 436, 438, 440, 442, 444, 446, 448, 450, 452, 454
, 456, 458, 460, 462, 464, 466, 468
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:         Little Endian
CPU(s):             172
On-line CPU(s) list: 0-171
```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.6

FusionServer 2288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

Platform Notes (Continued)

Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) 6787P
BIOS Model name: Intel(R) Xeon(R) 6787P
CPU family: 6
Model: 173
Thread(s) per core: 1
Core(s) per socket: 86
Socket(s): 2
Stepping: 1
BogoMIPS: 4000.00

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities

Virtualization: VT-x
L1d cache: 8.1 MiB (172 instances)
L1i cache: 10.8 MiB (172 instances)
L2 cache: 344 MiB (172 instances)
L3 cache: 672 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-85
NUMA node1 CPU(s): 86-171
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.6

FusionServer 2288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

Platform Notes (Continued)

Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	8.1M	12	Data	1	64	1	64
L1i	64K	10.8M	16	Instruction	1	64	1	64
L2	2M	344M	16	Unified	2	2048	1	64
L3	336M	672M	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-85

node 0 size: 515123 MB

node 0 free: 513736 MB

node 1 cpus: 86-171

node 1 size: 516017 MB

node 1 free: 514226 MB

node distances:

node 0 1

0: 10 21

1: 21 10

9. /proc/meminfo

MemTotal: 1055888128 kB

10. who -r

run-level 3 Jul 22 13:59

11. Systemd service manager version: systemd 252 (252-32.el9_4)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
dbus-broker getty@ insights-client-boot irqbalance kdump low-memory-monitor mdmonitor
microcode nis-domainname rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark sshd sssd
systemd-boot-update systemd-network-generator tuned udisks2 upower

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.6

FusionServer 2288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

Platform Notes (Continued)

```
enabled-runtime systemd-remount-fs
disabled canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot
chrony-wait chronyd-restricted console-getty cpupower debug-shell dnf-system-upgrade
firewalld kvm_stat man-db-restart-cache-update nftables pesign rdisc rhcd rhsm rhsm-facts
rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@
systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=(hd0,gpt3)/boot/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
root=UUID=6e68be6b-7476-48d7-b5fd-4f52d789df33
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=UUID=b288481a-71cc-4ab0-8cb3-70564a1c1698
```

14. cpupower frequency-info

```
analyzing CPU 63:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
```

15. tuned-adm active

```
Current active profile: throughput-performance
```

16. sysctl

```
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 40
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 10
```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.6

FusionServer 2288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

Platform Notes (Continued)

```
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.4 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.4 (Plow)
system-release  Red Hat Enterprise Linux release 9.4 (Plow)
```

```
-----
20. Disk information
SPEC is set to: /home/cpu2026
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   1.0T   70G  955G   7% /
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:          XFUSION
Product:         2288 V8
Product Family:  Birch Stream
```

```
-----
22. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.6

FusionServer 2288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2026
Hardware Availability: May-2025
Software Availability: Apr-2026

Platform Notes (Continued)

1x Hynix HMC94BDJHA380N 64 GB 2 rank 8800, configured at 8000
2x Hynix HMC94BDJHA383N 64 GB 2 rank 8800, configured at 8000
6x Hynix HMC94BDJHA462N 64 GB 2 rank 8800, configured at 8000
7x Hynix HMC94BDJHA464N 64 GB 2 rank 8800, configured at 8000

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: XFUSION
BIOS Version: 01.31.02.23
BIOS Date: 05/31/2026
BIOS Revision: 2.23

Compiler Version Notes

=====
C | 811.tealeaf_s(base) 816.nab_s(base) 881.neutron_s(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
=====

=====
C++ | 803.sph_exa_s(base) 857.namd_s(base) 867.nest_s(base)
| 872.marian_s(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
=====

=====
C++, C | 809.cactus_s(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
=====

=====
Fortran | 800.pot3d_s(base) 820.cloverleaf_s(base) 822.palm_s(base)
| 849.fotonik3d_s(base) 865.roms_s(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.6

FusionServer 2288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jul-2026
Hardware Availability: May-2025
Software Availability: Apr-2026

Compiler Version Notes (Continued)

2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both C and C++:
icpx icx

Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

C++ benchmarks:
-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -pthread
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

Fortran benchmarks:
-m64 -stand f18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -DSPEC_OPENMP
-fiopenmp -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500 -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-pthread -L/usr/local/jemalloc-5.3.0/lib -ljemalloc



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.6

FusionServer 2288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/xFusion-Platform-Settings-GNR-V1.7.html>

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64.2026-08-11.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/xFusion-Platform-Settings-GNR-V1.7.xml>

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64.2026-08-11.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-07-22 03:41:58-0400.

Report generated on 2026-08-11 18:26:55 by CPU2026 PDF formatter (unknown).

Originally published on 2026-08-11.